COMMITTEE ROOM

1900=01





Rebound 12/02/03



LLOYD'S REGISTER

OF

BRITISH AND FOREIGN SHIPPING.

REGISTER BOOKS AND PUBLICATIONS

THE COMMITTEE OF LLOYD'S REGISTER.

LLOYD'S REGISTER OF SHIPPING, issued annually on the 1st of July. This Book contains the Names, Classes, and detailed information concerning the Vessels classed by Lloyd's Register and the late Underwriters' Registry for Iron Vessels; and in addition, as far as possible, particulars of all SEA-GOING VESSELS in the world, and of all iron and steel vessels trading on the North American Lakes of 100 tons and upwards.

In the Appendix will be found a list of Owners of Ships recorded in the Register Book; details of the Dry and Wet Docks, Floating Docks, Pontoons, Patent Slipways, Tidal Harbours, Quays, &c., at all Ports in the World; a list of Telegraphic Addresses of all firms, &c., connected with Shipping (with the Telegraphic Codes severally employed), so far as ascertained; a list of Steamers arranged according to their gross tonnages; detailed Statistics respecting Merchant Shipping; lists of Shipbuilders, with names of existing Vessels built by each; list of fast Merchant Steamers, &c., &c.

A list is also printed in the Appendix of the Members and Subscribers of Lloyd's, and of the Agents to

The subscription for Marine Insurance Companies, Public Companies or Public Establishments is £6 6s. Lloyd's. per annum, for a single copy of the Register Book, and £3 3s. per annum for every additional copy supplied, unless the copies be periodically posted with type with additions and corrections throughout the year, in which case the subscription for each copy supplied will be £10 10s. per annum.

In the case of other Subscribers the subscription is £3 3s. per annum for each copy, unless periodically posted with type with additions and corrections throughout the year, in which case the subscription will be £5 5s. per annum for each copy supplied.

For the convenience of Subscribers not resident in London, or not having their Books posted, a Supplement, containing the additions to, and corrections in the Register Book, is issued fortnightly, and forwarded gratis to Subscribers.

The Rules for the Building and Classification of Steel Vessels are supplied with the above work.

- THE RULES FOR THE BUILDING AND CLASSIFICATION OF SHIPS are also published separately. PRICE: Rules for Steel Vessels, 5s.; Rules for Iron Vessels, 5s.; Rules for Wood and Composite
- A FRENCH TRANSLATION OF THE RULES FOR STEEL SHIPS, &c., is published separately. Price: -8s. (10 francs), post free.
- YACHT REGISTER, issued annually on the 1st of May. This book contains, in addition to the Names, Classes, and detailed information relating to Yachts classed by the Society, the Names, Dimensions, &c., of all British and Foreign Yachts, the particulars of which are known; also, in an Appendix, a List of the various Yacht Clabs, with Ulyetystians of their represtive Flags, on Ulyetysted List of the RAGING FLAGS of Yachts. Bules Clubs, with Illustrations of their respective Flags; an Illustrated List of the RACING FLAGS of Yachts; Rules of the Yacht Racing Association for rating, &c.; an Index of Signal Letters, a List of Yachts, the names of which have been changed, a List of Yachts arranged according to Tonnage, an Alphabetical List of the Names and Addresses of Yacht Owners so far as they can be ascertained, and a List of Yacht Builders and Designers, showing the Yachts which they have respectively built and designed, besides Statistical and other interesting information.

TERMS OF SUBSCRIPTION :- £1 1s. per annum, for which one copy is supplied with supplements.

THE RULES FOR THE BUILDING AND CLASSIFICATION OF YACHTS are published also separately. PRICE: -2s. 6d. per copy.

REPORT ON MASTING, being a Report made to the Committee of Lloyd's Register of British and Foreign Shipping by the Society's Chief Surveyor and his Assistants concerning the DISMASTING OF LARGE IRON SAILING SHIPS.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

ESTABLISHED 1834.

(United with the Underwriters' Registry for Iron Vessels in 1885.)

RULES & REGULATIONS

FOR THE

CONSTRUCTION AND CLASSIFICATION OF STEEL VESSELS.

From 1st July, 1900, to the 30th June, 1901.



OFFICE:-2, WHITE LION COURT, CORNHILL, LONDON.
1900.

LONDON: .

PRINTED BY LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING, AT THE SOCIETY'S PRINTING HOUSE, 64, SOUTHWARK STREET, S.E.

1900.

TABLE OF CONTENTS.

											Page
INDEX											vi–xxxvi
LIST OF THE COMMITTEE											1
LIVERPOOL COMMITTEE											2
GLASGOW COMMITTEE											2
LIST OF SURVEYORS											3-24
GENERAL RULES RELATIN	G TO A	DMINIS	TRATION	OF TH	E Socia	ETY, TE	RMS OF	SUBSCI	RIPTION	то	
THE REGISTER BOOK	k, Dut	IES OF	THE SU	RVEYOR	RS, FEE	s, &c.					25-30
RULES FOR THE CONSTRUC	TION AN	ND CLAS	SIFICAT	TION OF	STEEL	VESSEI	LS				33-97
RULES FOR THE SURVEY A	ND CON	STRUCT	ION OF	ENGINE	ES AND	BOILER	S FOR	STEAM	VESSEL	S	99-112
Rules for the use of El	ECTRIC	LIGHT	on Bo	ARD VE	SSELS						113-116
REFRIGERATING MACHINE	RY AND	APPLI	ANCES								117-122
EXTRACT FROM THE RUI	ES OF	THE J	JNDERV	VRITERS	s' REGI	ISTRY	FOR IR	ON VE	SSELS A	AND	
TABLE 14 EQUIPME	NT FOR	STEAM	VESSE	LS							123-126
TEST FOR CAST STEEL AND											
LIST OF STEEL WORKS											129-130 <i>b</i>
Illustrations											131-145.
TABLE 22 OF CHAINS AND											145
TABLES S 1, S 1 A & S 1 B,	S 2, S	3, S 3 A	& S 3	B, S 4 &	& S 4A,	, S 5, S	6, G 7	, S 7, 1	AND S 8		
DIMENSIONS OF FI	RAME, I	PLATING	F, KEE	LSONS,	RUDDE	RS, BE	AMS, P	ILLARS	, &c., 1	FOR	
STEEL SHIPS											145
Tables of Scantlings, &c											
RIGGING											
TABLE 12.—PRINCIPAL DI	MENSIO	NS OF A	NCHOR	CRANE	S AND I	BOATS'	DAVITS		See aj	fter	145
		-	-								
FORM OF CERTIFICATES OF	CHARA	CTER							• • •		147
FORM OF CERTIFICATES OF	MACHI	NERY F	OR VES	SELS N	AVIGATI	ED BY S	TEAM				147-148
COPIES OF CIRCULARS, NOT	CICES, &	cC.									148-163
EDUEDOADD MARKING FOR			ND SATI	LING V	ESSELS						164-165

INDEX.

Α.	PAGE
Additional strength for vessels from 11 to 16 depths to length (Sec. 46, see also Table S 6)	96
exceeding 16 depths to length (Sec. 46, see also footnote,	
Table $S(6)$	96
having a tonnage co-efficient of '78 or having a full form	
at the forepart (Sec. 6, par. 1; Sec. 11, par. 1; Sec. 19,	
par. 1; Sec. 24, pars. 2, 4, 18, 22, 35, 37 & 41)	45, 49, 63, 72
	73, 74, 75, 76
Alterations in the Rules, see under Notices (see also Sec. 16, par. 2, 7 age 27)	161–163
Anchors, chains, warps, &c. (Sec. 39, see also Table No. 22 after page 145)	87, 88
for steam vessels classed in the late Underwriters' Registry	126
and cables. Proving establishments under the control of the Committee	
(Notice No. 851; see also Table 22)	158
the efficient state and condition of, designated by the figure 1	
(Sec. 39, par. 12; also par. 10, page 34)	88
deficiencies in, figure 1 expunged (Sec. 39, par. 12; also par. 10,	00
page 34)	- 88
cast steel, and tests for same (Notice No. 647)	127-128
Anchor cranes and boats' davits (Sec. 39, par. 11; see also Table 12)	88
Angle stringers and angles to keelsons and stringers, sizes reduced at ends (Sec. 12)	50
— bars for keelsons, hold and beam stringers (Table S 3)see after	145
Annual survey (Par. 1)	33
Appointments vested in the Committee	26
Asphalt, enamel cement or similar compositions (Sec. 35, pars. 2 & 3)	82
Awning-decked steam vessels (Sec. 43, see also Tables S 1 to 6)	91-93
vessels, freeboard as a condition of class (Sec. 43, pars. 1-3)	91, 92
partial, freeboard as a condition of class (Sec. 43, par. 1-3)	91, 92
frames and reversed frames, height to be carried (Sec. 43, pars.	
6 & 7, footnote of Table S 6, and Sec. 8, par. 4)	92
side plating as per Table 2 (Sec. 43, par. 8)	92
stringer plates (Sec. 43, par. 9)	92
tie plates and side plating, butts of (Sec. 43,	00
par. 11)	92
erections for navigation only allowed (Sec. 43, par. 5)	92
D	
Ballot, all elections to be made by	26
Beams, form and size of (Sec. 13, see also Table S 4 after page 145)	50-52
form of bulb of bulb plates, tee bulbs and bulb anglessee sketches on pages	143, 144
torn of build places, the build and build anglessee shellines on preges	-10) -11

AND MAN	PAGE
Beams, arms or knee plates, depth of, &c. (Sec. 13, pars. 13 to 18; Sec. 14a, par. 6; and	
Sec. 14b, par. 5)	51, 52, 57, 59
at throat (Sec. 13, par. 16)	52
number of rivets in (Sec. 13, par. 18)	52
at ends of hatchways (Secs. 13 & 28, see also Table S 4A after page 145)	51,79
—— half, in way of hatchways (Secs. 13 & 28)	51, 79
—— hold, web frames and side stringers in lieu thereof (Sec. 14A)	57, 58
——hold, in way of raised quarter deck (Secs. 14a & 45)	58, 95
deep framing and side stringers in lieu thereof (Sec. 14b)	59
when adopted under raised quarter decks (Sec. 14b, par. 7)	60
in engine and boiler rooms (Sec. 13, par. 12; Sec. 14, par. 32; Secs. 15 & 26)	51, 56, 61, 77
in way of hatchways, where steel decks are fitted (Sec. 23, pars. 13 & 14)	70
of spar and awning decks, poops, forecastles, raised quarter decks, &c. (Secs.	
42 to 45, see also Table S 4)	90-94
——— panting, and stringers at ends of vessels (Sec. 18)	62, 63
—— round up of (Sec. 13, par. 1)	50
—— spacing of, according to depth from top of keel (Sec. 14)	52-57
where deck is laid (Sec. 14, par. 31)	56
upper, middle and hold or lower deck, of extra strength in machinery space	
(Sec. 26, see also Sec. 14, par. 32)	77
—— where steel decks are fitted (Sec. 23, pars. 13 & 14)	70
Bearers under engines and boilers, construction of (Sec. 26)	77
Bilge keelsons and stringers in hold (Sec. 10, see also Secs. 14, 14a & 14b)	49, 52, 57, 59
Bitts, how fitted (Sec. 34)	82
Black line expunging class from reported defects (Par. 14)	34
Boats, number and quality of (Sec. 39, par. 10)	88
Boats' davits and anchor cranes (Sec. 39, par. 11, see Table 12 after page 145)	88
Boiler bearers, construction, &c. (Sec. 26)	77
Boiler and engine openings (Sec. 29)	80
Boilers—Rules for Machinery	99-112
certificates and records in Register Book (Pars. 1, 3, 70 to 73 & 77 to 79)	99, 111, 112
granted for a limited period (Par. 79)	112
——————————————————————————————————————	104
steel boilers (Par. 41)	105
——————————————————————————————————————	109
——————————————————————————————————————	
limited period, according to the nature of the case (Par. 79)	112
—— experimental or machinery experimental (Par. 6)	39
——————————————————————————————————————	106
——————————————————————————————————————	108
—— girders (Par. 51)	107, 108
graders (1 to . or)	,

ix

INDIA.	PAGE
Bulwark plating at ends of cargo ports, stays to (Sec. 31)	81
Bunkers, coal, pipes and lids (Sec. 30)	81=
—— of iron and steel ships (Notice No. 673)	154
Butt straps and lining pieces (Sec. 20, see also Table S 8)	64, 65
Butt straps double to stringer plate, sheerstrakes and outside plating, thickness of (Sec. 20)	64
to flat keel plates (Sec. 5, par. 6; and Sec. 20, par. 9)	44, 65
to floor plates (Sec. 7, par. 3)	46
to reversed angle irons (Sec. 8, par. 7)	46
———— to middle line keelson (Sec. 9, pars. 1 & 2)	47
to rider plate (Sec. 9, pars. 1 & 2)	47
——————————————————————————————————————	64, 66
——— to deck stringer plates (Sec. 20)	64, 66
——————————————————————————————————————	64
spacing of rivets in (Sec. 21; see also Table S 8 after page 145)	66, 67
Butts, shifting of, in outside plating (Sec. 19, par. 4)	64
stringer plates (Sec. 19, par. 6)	64
garboard plates (Sec. 19, par. 7)	64
strakes when doubled, and of doubling strakes (footnote Secs. 19 & 21)	63, 66
—— of plating where overlapped (Sec. 20, par. 13; see also Table S 8)	66
——————————————————————————————————————	90
side plating of awning-decks (Sec. 43, par. 11)	92
	92
——————————————————————————————————————	93, 94
steel deck (Sec. 23, par. 19)	71
Bye Laws, power to make	26
C.	
Cables, chain, when to be inspected and when to be renewed (see Special Surveys,	36, 38
Nos. 1, par. 6; 2, par. 3; & 3, par. 6)	77
	77
——————————————————————————————————————	
(Sec. 25, par. 1)	77
vessels exclusively engaged in carrying coal, ore or wood, without cargo	
battens, certificate endorsed "Subject, etc." (Sec. 25, par. 4)	77
Carlings of hatchways, pillars to, should not exceed four frame spaces apart (Sec. 15, par. 9)	61
Cast steel mast caps (Circular No. 536)	151
——————————————————————————————————————	44, 84
anchors, tests for (Notice No. 647)	127
Castings, steel, for machinery (Par. 33)	102
fees for inspection (Notices Nos. 614 & 620)	152, 153

INDEX.

	PAGE
Cocks, pipes and sea connections (Pars. 34 to 39)	103
Collision bulkheads (Sec. 22)	68
no sluice valve or cock is to be fitted to (Sec. 27, par. 1, & Sec. 38,	70.00
par. 8)	78, 86
Committee, how constituted	26
———— Technical Sub-, how constituted	27
———— Ex-officio Members	26
retirement	26
——— vacancies to be filled up	26
———— election of Chairman and Deputy-Chairman	26
———— Special Meetings	26
— to assign Character	27
———— Classification, rotation	26
Chairman of	26
Bye-Laws, power to make	26
———— Members excluded if interested in Ship	26
Compensation for dispensing with hold beams (Secs. 14, 14a & 14b)	52, 57, 59
——————————————————————————————————————	82
the omission of wood middle deck (Sec. 41, par. 13)	89
main deck in spar-deck vessels (Sec. 42, pars.	
21 & 22)	91
cutting large openings in deck plating (Sec. 23, par. 19)	71
Copies of original Reports granted	27
Countersinking (Sec. 21, see Sketches on Table S 8)	67
Crutches and hooks and painting arrangements (Sec. 18)	62
D.	
Date of build of a vessel (Par. 18)	35
— when the special periodical surveys respectively become due (Par. 18)	35
Damage, notice of repairs necessary in consequence of (footnote)	34
Davits, boats' and anchor cranes (Sec. 39, par. 11; see also Table 12 after page 145)	88
Deadlights to skylights (Sec. 29)	80
Decks, wood, steel or iron (Sec. 23; see also Tables S 3 & S 5)	69-71
when of teak, thickness of (Sec. 23, pars. 8 & 17; see also Table S 3)	70, 71
record of, in Register Book (Notice No. 895)	159
Deck planks, when to be renewed (Sec. 23, par. 12; see also S.S. Nos. 1, 2 & 3)	70
when of pine for weather deck, period of seasoning (Sec. 23, see also Circular	
No. 852, page 158)	69
Decks, steel (Sec. 23, pars. 13 to 25; see also Table S 3 & S 5)	70, 71
or iron, caulking of (Sec. 23, par. 18)	71
how noted in the Register Book (Sec. 23, pars. 22 & 23)	71 ·
	69, 70

INDEA.	PAGE
Double bottoms, bracket plates outside and inside of margin plates, height up bilges (Sec.	
14b, par. 1; Sec. 24, par. 21)	59, 74
connection of, to margin plates (Sec. 24, pars. 13, 16, 21,	0 70 74 75 70
(24, 29, & 36)	2, 15, 14, 15, 16
, to inner bottom plating by gusset plates or	
other efficient ties (Sec. 24, pars. 13, 15, 21, 23, 36, & 38)	72, 74, 75, 76
depth of margin plates may be 10 per cent. less than Table when tiers of	,,,
beams are fitted, etc. (see footnotes to Table S 7, after page 145)	_
how recorded in Register Book (see Key to Register Book)	_
in vessels of a full form, additional intercostal keelsons to be fitted forward	
(Sec. 24, par. 2)	71
frames to be doubled between the collision bulk-	
head and the three-fifths length forward	
(Sec. 6, par. 1; Sec. 24, pars. 14, 22, & 37)	45, 73, 74, 76
number and size of rivets in the angles connecting floors and outside	155
bracket plates to margin plates (see Table S 7 after page 145)	155
outside plating in way of (Sec. 24, pars. 18, 34, & 41)	73, 75, 76 72
top of, must be protected wood ceiling (Sec. 24, par. 7)	
in engine and boiler space (Sec. 24, pars. 8, 17, 21 & 36; Sec. 26, par. 4)	12-15, 11
parts to be increased (Sec. 24 & Table S 7)	86
Doubling plates under sounding pipes (Sec. 38, par. 11)	155
Doubling of flat plate keel, when required (Sec. 5, par. 4; Sec. 9, par. 6; also Table S2)	43, 48
Doubling strakes, butts of (Sec. 19 & 21, footnote)	63, 66
Doubling strakes, buttes of (Bec. 13 & 21, Journal)	, , , ,
E.	
Edges of plating, shearing of (Sec. 19, par. 7)	64
— and Butts of plating to be carefully caulked (Sec. 19, par. 7)	64
Electric light on board vessels	113-116
Enamel cements, Asphalt or similar compositions (Sec. 35, pars. 2 & 3)	82
Engines and boilers for steam vessels, Survey and construction of	38, 99-112
Engines—Rules for Machinery	99-112
and boilers built under special survey, distinguishing mark # in red	39, 99
——————————————————————————————————————	102
———— certificates and records in Register Book (Pars. 1, 3 & 70-73; also pages 38 & 39)	99, 111
granted for a limited period (Par. 73)	111
——— cocks, pipes, valves and sea connections (Pars 34-39; see also Sec. 38, page 85)	103
——— dimensions of bilge pipes (Sec. 38, par. 16)	86
——: donkey pumps (<i>Pars. 22 & 25</i>)	101

INDEX. XV

Engines, surveys, rules not complied with, class expunged with a Red Line (Par. 13)	34
of engines and boilers of vessels classed in the late Underwriters'	
Register for Iron Vessels (Circulars 689 & 834)	149, 150
Engine bearers (Sec. 26)	77
par. 32, page 56)	77
——— seating in vessels with engines of great power (Sec. 26, par 2)	77
—— and boiler openings (Sec. 29)	80
room skylights (Sec. 29, pars. 6 and 7)	80, 81
Equipment (Sec. 39, see also Table No. 22, after page 145)	87
——————————————————————————————————————	88
——————————————————————————————————————	
(Par. 6)	87
——————————————————————————————————————	
also par. 10, page 34)	88
——————————————————————————————————————	00
——————————————————————————————————————	87
of the Turret deck type (Par. 9)	88
where erections are fitted upon erections (Sec. 39, par. 8)	
	87
insufficient in quantity or defective in quality, indicated by a dash thus— following the character assigned (Sec. 39, par. 12; also par. 10, page 34)	00
	88
in case where the figure 1 is expunged on account of deficiencies in the	
anchors or chains, the record of Lloyd's A. & C.P. or A. & C.P., also	
expunged (Sec. 39, par. 12)	88
in the cases of foreign owned vessels classed with the figure 1 (Sec. 39, par. 5)	87
Erections on awning decks (Sec. 43, par. 5)	92
spar decks (Sec. 42, par. 3)	90
——— where fitted upon erections, equipment number is to be increased (Sec. 39,	
par. 8)	87
Expenses, travelling (Par. 9)	30
——— or any fees, non-payment of, class liable to be withheld, withdrawn or expunged	30
Experimental boiler and machinery (Par. 6)	39
Expired, inserted against vessels' character, if not surveyed when due, before leaving	
the U.K. (Par. 23)	35
Expunging of class with Red line for non-compliance with Rules (Par. 13)	34
Black line from reported defects (Par. 14)	34
figure 1., with a dash thus — (Page 34, par. 10 and Sec. 39, par. 12)	88
————— on account of deficiences in the anchors or chains (Sec. 39, par. 12)	88
Ex-steamer, record of, in the Register Book (Circular No. 676)	154
Extreme proportions, vessels of, to have additional strength (Sec. 41, par. 12; Sec. 42,	
pars. 17, 18, 19; and Sec. 46, see Table S 6)	89, 91, 96

F.

1 1 (9- 92 and also Table 8 3 after page 145)	69, 70
Fastenings of wood decks (Sec. 23, see also Table S 3, after page 145)	157
Feeders in grain-laden vessels (Circular 100. 352)	28, 30
Fees, tables of	30
— Freeboard, for survey and assignment to vessels	28
— Freeboard, for survey and assignment to vesses for first entry of class in the Register Book	28
— for first entry of class in the Register Book for entry of notification L.M.C. in the Register Boook	29
— for entry of notification L.M.C. in the Register Boook for special surveys of ship or machinery. hell Neg 1, 2 & 3 (Par. 7)	29
	30
of machinery (Par. 7)	30
annual surveys of boilers (Par. 7)	
annual surveys of bollers (1 th. 1) formula for determining nominal horse-power for regulating fees for new engines	29
	152, 153
(see also Key to Register Book) for inspection of forgings and castings (Notice Nos. 614 & 620) or inspection of forgings and castings (Notice Nos. 614 & 620)	29
food by the Society's Holl-exclusive sur to other	28
vessels surveyed for special surveys Nos. 1, 2 and 3	_
vessels surveyed for special surveys Ros. 1, 2 and 1, 2 a	
c 1. C most overtion continuation. Of the character is	29
	29
occasional surveys (Par 6)	28
— surveys of repairs at foreign ports (2 to . 5) to Surveyors	
— to Surveyors non-payment of any fees or expenses, class liable to be withheld, or if already granted, withdrawn or expunged	30
withdrawn or expunged	84
withdrawn or expunged	88
Figure 1 for equipment (Page 54, par. 10, that Sec. 39) expunged on account of deficiencies in the anchors or chains (Sec. 39, par. 12) expunged on account of deficiencies in the anchors or chains (Sec. 39, par. 12)	87
expunged on account of deficiences in the section of the section o	87
	43, 48
Flat plate keels (Secs. 5 & 9, see also Table S 2) doubling, when required (Sec. 5, par 4; Sec. 9, par. 6 and Table S 2)	43, 48
Floor plates (Sec. 7, see also Table S 1, after page 145)	45
Floor plates (Sec. 7, see also Table S 1, ager page 115)	45
Floor plates under engines and bollers (Sec. 1, per 1, and Table bottom is fitted (Sec. 24, and Table	
8 7)	71-76
1 (See 7 & 26 mar 2)	40, 11
the resulting control Diale (Del. 1. Del. 6.	
1 . 1	
the account over the half breadth (Dec. 1, put. 1)	
reduction in thickness at ends of vessel (Sec. 7; see also Table S 1)	45
reduction in unickness at this of vesser	

	PAGE
Form of Certificates of Character	147, 148
Forecastles (Sec. 44)	93
sunk (Sec. 45)	94
Forgings, of the stern frames, scarpling of with keel (Sec. 5, par. 9)	44
welding of large (Circular No. 583)	151, 152
or castings for ships (Sec. 5, pars. 9-13, see Sec. 36)	44, 84
for engines (Par. 30)	102
fees for inspection of (Notice Nos. 614 & 620)	152, 153
Formula for determining the NIP of engines and for regulating fees (see also Key to the	
Register Book	29
Foundation plate to middle line keelson (Sec. 9, par. 3)	47
Frames (Sec. 6; also] and channel and bulb-angle bar frames, see Table S 1)	45
at after end of vessels, spacing of, to ensure sound riveting, &c. (Sec. 6 & 26)	45,77
- in steamers having a co-efficient of '78, or having a full form at fore part to	
be doubled (Sec. 6, par. 1; Sec. 24, pars. 14, 22 & 37)	45, 73, 74, 76
——— punching of rivet holes in (Sec. 6, par. 3)	45
—— spacing of (Sec. 6, par 4, see Table S 1)	45
and reversed frames of 3-decked vessels (Sec. 41, pars. 2, 4 & 5)	88
awning-decked vessels (Sec. 43, pars. 6 & 7)	
in way of poops and forecastles (Sec. 6 & 44)	45, 93
in way of bridge houses (Sec. 44, par. 10)	
raised quarter-decked vessels (Sec. 6 & 45)	
spar-decked vessels (Sec. 42, pars. 5 & 6)	90
Framing, deep, in lieu of hold beams or web frames (Sec. 14b; see also Table S 1)	59, 60
connection of side stringers to W.T. bulkheads (Sec. 14b, par. 4; sec.	3
also Sketch, page 139)	
depth to be increased, in vessels without double bottoms (Sec. 14b	,
par. 1)	
height of reversed frames (Sec. 14b, par. 3)	. 59
in the case of 3 deck and Spar deck vessels (Sec. 14b, par. 6)	
number of side stringers (Sec. 14b, par. 4; see also Sketches, page 138)	
when adopted under Raised quarter decks (Sec. 14b, par. 7)	. 60
——— when adopted in vessels over $32\frac{1}{2}$ feet in depth from top of keel (Sec	
14b, par. 8)	. 60
Freeboard assigned to a vessel as a condition of class (Par. 9. See also Sec. 41, par. 13)	34, 89
awning and part awning-decked vessels, as a condition of class (Sec. 43, pars	
1, 2 & 3)	,
———— diagrams showing marking for steamers and sailing vessels	164, 165
——— minimum for vessels classed for Channel purposes to have $(Pars.\ 8\ and\ 9)$	
——— vessels of exceptional fineness of form, &c. (Sec. 2, par. 6)	40
——— when required for spar-decked steam vessels (See. 42, pars. 2, 21 & 22)	. 91

xviii LLOYD'S REGISTER OF SHIPPING. Pull form at the fore part, vessels of, additional strengthening, &c. (Sec. 6, par. 1; Sec. 11, par. 1; Sec. 19, par. 1; Sec. 21, par. 6; Sec. 24, pars. 2, 14, 18, 22, 35, 37 Sec. 11, par. 1; Sec. 19, par. 1; Sec. 21, par. 6; Sec. 24, pars. 2, 14, 18, 22, 35, 37 &c. 11, par. 1; Sec. 19, par. 1; Sec. 21, par. 6; Sec. 24, pars. 2, 14, 18, 22, 35, 37 Sec. 11, par. 1; Sec. 19, par. 1; Sec. 21, par. 6; Sec. 24, pars. 2, 14, 18, 22, 35, 37 Sec. 11, par. 1; Sec. 19, par. 1; Sec. 21, par. 6; Sec. 24, pars. 2, 14, 18, 22, 35, 37 Sec. 11, par. 1; Sec. 19, par. 1; Sec. 21, par. 6; Sec. 24, pars. 2, 14, 18, 22, 35, 37 Sec. 11, par. 1; Sec. 19, par. 1; Sec. 21, par. 6; Sec. 24, pars. 2, 14, 18, 22, 35, 37 Sec. 11, par. 1; Sec. 19, par. 1; Sec. 21, par. 6; Sec. 24, pars. 2, 14, 18, 22, 35, 37 Sec. 11, par. 1; Sec. 19, par. 1; Sec. 21, par. 6; Sec. 24, pars. 2, 14, 18, 22, 35, 37 Sec. 11, par. 1; Sec. 19, par. 1; Sec. 21, par. 6; Sec. 24, pars. 2, 14, 18, 22, 35, 37 Sec. 11, par. 1; Sec. 19, par. 1; Sec. 21, par. 6; Sec. 24, pars. 2, 14, 18, 22, 35, 37 Sec. 11, par. 1; Sec. 19, par. 1; Sec. 21, par. 6; Sec. 24, pars. 2, 14, 18, 22, 35, 37 Sec. 11, par. 1; Sec. 19, par. 1; Sec. 21, par. 6; Sec. 24, pars. 2, 14, 18, 22, 35, 37	73, 74, 75, 76
G.	
Garboard strakes, breadth and thickness (see Table S 2, after page 145) — connection of, also of after lengths of plating to stern frame of steamers (Sec. 19, par. 1) — if thicker than required, reduction allowed in keel (Sec. 5, par. 2) — reduction in thickness of, at ends (Sec. 19, see also Table S 2) — shift of butts of, &c. (Sec. 19, par. 6) Grain-laden vessels, feeders in (Circular No. 832) Gusset plates to hold beam ends (Sec. 14 & Sec. 14a, pars. 16–19) — stringer plates at all bulkheads where strong hold beams are fitted (Sec. 14, par. 28) — connecting outside bracket plates of double bottoms to the inner bottom plating (Sec. 24, pars. 13, 15, 21, 23, 36 & 38) Gutter waterways at upper decks (Sec. 16, par 10; Sec. 19, par. 12) — size of angle bar at inner edge (Sec. 23, par. 6) — of new vessels to be tested (Sec. 23, par. 25)	74–76 62, 64

H.

	81
Hatches, coal bunker (Sec. 30)	79
Hatches, coal bunker (Sec. 30) Hatchway beams, coamings, &c. (Sec. 28) Hatchway beams, coamings, &c. (Sec. 28)	_61
Hatchway beams, coamings, &c. (Sec. 28) Hatchway beams, coamings should not exceed four frame spaces apart (Sec. 15, par. 10) Hatchways, pillars to coamings should not exceed four frame spaces apart (Sec. 15, par. 10)	61
Hatchways, pillars to coamings should not exceed four frame spectrage. Hatchways, pillars to coamings should not exceed four frame spectrage. 26 feet in length and above, to be pillared at the corners (Sec. 15, par, 10) 26 feet in length and above, to be fitted (Sec. 28, par. 7)	80
26 feet in length and above, to be pillared at the correct self-trimming, wing boards to be fitted (Sec. 28, par. 7)	141
self-trimming, wing boards to be fitted (Sec. 28, par. 1) sketch showing arrangement of shifting beams in cargo sketch showing arrangement of shifting beams in cargo	
Hawsers, &c., of steel wire (see Table 22 & Notes (i))	84
Hawsers, &c., of steel wire (see Table 22 & Notes (1)) Hawse-pipes and windlass (Sec. 37) Hawse-pipes and windlass (Sec. 18)	62
Hawse-pipes and windlass (Sec. 37) Hooks and crutches and panting arrangements (Sec. 18) (Sec. 18)	62
Hooks and crutches and panting arrangements (Sec. 18) at ends of stringers (Sec. 18) the NHP of engines and for regulating fees for new	
—— at ends of stringers (Sec. 18) Horse-power, formula for determining the NHP of engines and for regulating fees for new Register, Book)	29
Horse-power, formula for determining the NH of engines and to see also Key to Register Book)	
engines (see allo 223	

INDEX.	PAGE	xix
Houses, bridge (Sec. 44)	93	
Hull of a steamer, conditions on which a provisional certificate will be issued (Par. 7)	39	
Hull of steel vessels, desirable to be dry-docked, cleaned and re-coated shortly after		
launching (Sec. 4, par. 3)	43	
— when the rules as regards survey are not complied with, character expunged with a		
red line (<i>Par. 13</i>)	34	
— when found from reported defects, &c., character expunged with black line (Par. 14)	34	
1.		
Intercostal keelson plates, when flat plate keels are used (Sec. 5, par. 5; Sec. 9, par. 6)	44, 48	
——————————————————————————————————————	47, 48	
——————————————————————————————————————	49	
in steamers of a full form at fore part (Sec. 11, par. 1; Sec. 24,		
par. 2)	49, 71	
——————————————————————————————————————		
	49	
when not required, wash plates to be fitted (Sec. 11, par. 4)	50	
and the second of the second o		
K.		
Keels, bar and flat plate, stem and stern posts and transoms (Sec. 5, see also Table S 2)	43-45	
— bar, riveting of, to be at least double (Sec. 21, par. 1)	67	
— and keelson, centre through plate (Sec. 9, par. 7)	48	
— and keelsons made of various thicknesses of plates (Sec. 5, par. 3)	43	
—— flat plate, butt straps of (Sec. 5, par. 6)	44	
doubling of (Sec. 5, par. 4; Sec. 9, par. 6 and Table S 2)	43, 48	
— if scarphed, length of scarph of keel bars and posts (Sec. 5, par. 1)	43	
—— plates, flat or hollow (Sec. 5, pars. 4, 5 & 6; see also Table S 2)	43, 44	
— scarph of, with stern frames (Sec. 5, par. 9)	44	
— scarphs to be shifted clear of butts of garboard strakes (Sec. 19, par. 6)	64	
length of, with stern posts or frames (Sec. 5, par 9)	44	

— with stem (Sec. 5, par. 7)

thickness of, reduced, when garboards are increased (Sec. 5, par. 2)

44 43

b 2

INDEX.	PAGE
Mast spars, and rigging (see Tables 9, 10, & 11, after page 145)	PAGE
and sails, to be maintained in good order, &c. (Sec. 39, par. 1) reported defects, class expunged with a black line indicating	87
same (Par. 14)	34
non-compliance with Rules as regards Survey, class expunged	
with a red line (Par. 13)	34
Masts, topmasts, bowsprit, yards, &c., scantlings of steel or iron and tests for (see Tables	
9 & 10 after page 145)	
Middle line single plate keelson (Sec. 9, pars. 1–3)	47
——————————————————————————————————————	47, 48
centre through-plate, keel and keelson (Sec. 9, pars. 6–7)	48
bulkhead in lieu of pillars, thickness and stiffening of (Sec. 15, par. 13)	61
Midship sections, &c., to be submitted (Sec. 1, par. 1; Sec. 2, par. 6; Sec. 40; Sec. 42,	00 01 09 06
par. 2; Sec. 43, pars. 2 & 5; Sec. 46, par. 3; Sec. 47)	88
forwarded with reports (Sec. 40)	33
Minimum freeboard, vessels classed for Channel purposes to have a (Par. 8)	90
——————————————————————————————————————	91, 92
——————————————————————————————————————	01, 02
N.	
Numbers for scantlings, how obtained (Sec. 2)	40
——— for equipment (Sec. 39, pars. 7 & 8; see also footnote to Table 22, after page 145)	87
Numerals prefixed to letter A , meaning of (Par. 1)	33
Non-compliance with Rules, as regards Surveys, expunging of Class with a red line on	
account of (Par. 13)	34
Notations in the Register Book (see also Key to Register Book)	,87,88,89,90, 9,111,112,117
of iron or steel decks (Sec. 23, pars. 22 & 23)	71
	117–122
Additions and Amendments in the Rules, as follows (No. 1026, date 114-12-99)	
Equipment—Tonnages for regulating the equipment of large sailing vessels, steam vessels, and steam trawlers omitted from table (Table 22).	.01,102
For sailing and steam yachts (Table 14 of the Yacht Rules amended).	
Close ceiling and cargo battens (Sec. 25, pars. 1 & 4)	
Circular No. 909—Fitting of cargo battens (Page 155 with-	,
	•

AAII	PAGE
Notices, No. 1028, dated 26-4-00. Alterations and amendments as follows	
General Rules, Sec. 28, par. 1, page 29. A minimum Fee of £7 0s. 0d. is	
prescribed for Special Surveys during construction.	
Beams (Sec. 13. The whole Section amended, and new Tables, S4 and S4 A,	
provided. The present Table S 4 in the Rules cancelled).	
Beams and Stringers in holds (Sec. 14. Slight amendments in Pars, 9, 10,	
11, 12, 13, 17, 18, 20, 22, 23, 24, 25, 26 d 27).	
Web frames in lieu of hold beams (Sec. 14a, par. 5).	
Pillars (Sec. 15. The whole Section amended, and new Tables S 1 A and	
S 1 B provided, giving minimum scantlings for solid and hollow	
pillars). ———————————————————————————————————	
Riveting (Sec. 21, par 6).	
Bulkheads (Sec. 22, pars. 1, 2 & 7).	de journ a trans
Steel decks (Sec. 23, pars. 13, 14 & 18). Rudders and steering gears (Sec. 36, pars. 2, 8 & 9 amended; par. 3	·
omitted, and new paragraphs relating to requirements for steering gear	
introduced between the present pars. 7 & 8, and new Table S 3 B provided,	
setting forth the minimum sizes of steering chains, rods and tillers for	
steam vessels.)	
Pumping arrangements (Sec. 38, par. 7 amended, and par. 13 omitted).	
Equipment (Sec. 39, par 8, a new clause added regarding erections upon	
erections, and as a footnote to Table 22).	
Spar-decked vessels (Sec. 42, two new paragraphs added, dealing with spar-	
deck vessels with only one deck laid).	
Raised quarter-deck and sunk forecastles (Sec. 45, par. 4).	
Table S 6 (The second foot-note amended).	
Rules for Machinery of Steam Vessels—Shafts (Pars. 30, 32, 59, 60, 61, 62	and the second
and 65 amended).	
Electric lighting (Par. 14 amended).	
Anchors and Cables—Proving Establishments under the control of the Committee	
of Lloyd's Register of Shipping (No. 851)	
Anchors, cast steel, tests for (No. 647)	. 127, 128
Boiler manholes and fittings (No. 912)	. 159
Bunkers of iron and steel ships (No. 673)	. 154
Cast steel anchors, tests for (No. 647)	. 127, 128
Cast steel mast caps (No. 536)	. 151
Certificates of character, forms of	
——— Charges for inspection of forgings or castings for ships and engines (Nos	
614 & 620)	
— — Doubling plates in boilers (No. 773)	
Ex-steamer, record of (No. 676)	. 154

INDEX. XXIII

		PAGE
Notices,	Feeders in grain-laden vessels (No. 832)	157
	Fees, reduction of, for surveys held in the U.K. on old ships and old engines and	
	boilers (No. 920)	160
	Freeboard, diagrams showing marking for steamers and sailing vessels	164, 165
	Iron or steel decks in raised quarter deck vessels (No. 847)	157
	Oil carrying vessels, danger in using oil tanks for carrying water ballast	
	(No.~831)	156
	Petroleum carrying vessels, testing of oil tanks (No. 722)	155
	Pitch pine, weather decks of, seasoning, laying and caulking of (No. 852)	158
	Reduction of fees for surveys held in the U.K. on old ships and old engines and	
-	boilers (No. 920)	160
	Shafting (No. 982)	160
	Shafting (No. 982)	002,20000
- /	Steel vessels, inside and outside surfaces of, placing in dry dock within 6 months	154
	from date of launching for scaling and coating (No. 705)	129-130в
	Steel Manufacturers, list of	125-150B
	Survey of engines and boilers of vessels classed in the late Underwriters' Registry	
	(Nos. 689 & 834)	149, 150
	Survey of repairs of damage of ships or machinery at ports abroad (No. 636)	153
	Teak decks, record of, in the Register Book (No. 895)	159
	Welding of large forgings (No. 583)	151, 152
	· Underwriters' Registry for iron vessels, terms of amalgamation	148
	Survey of engines and boilers of vessels classed in the late	149, 150
	0.	
		1=0
Oil-car	rying vessels, danger in using the oil tanks for carrying water ballast (Circular 831)	
- 10-	test for oil tanks (Circular 722)	
Openin	igs in decks to be compensated for (Sec. 23, pars. 19 & 20; see also Sec. 28 & 29)	
	— engine and boiler (Sec. 29)	80
	P.	
	g, to prevent (Sec. 18)	62
	- arrangements for sailing vessels (Sec. 18, pars. 3-5)	
Period	ical surveys of machinery and boilers (pars. 63-79)	111, 112
	————of vessels	34-38
Petrole	eum vessels, testing of oil tanks (Circular 722)	155
	danger in using the oil tanks for carrying water ballast (Cir. No. 831)	156
Partne	ers, mast (Sec. 28)	79

Peaks, when used for water ballast, a wash plate to be fitted and test for peaks (Sec. 24,	PAGE
par. 5)	72
and deep water ballast tanks, their water tightness to be tested (Sec. 24, par. 4;	
see also Surveys, Nos, 1, 2 & 3)	36-38, 72
Pillars, solid and hollow (Sec. 15; see also Table S 3A & S 3B)	60, 61
girders under beams to take heads of pillars (Sec. 13, par. 3 & Sec. 15, pars. 1,	
2, 7 & 8)	50, 60, 61
where one, two or three rows are fitted in vessels (Sec. 13, par. 4, & Sec. 15)	50, 60
when a middle line bulkhead is fitted in lieu of (Sec. 15, par. 13)	61
Pipes, soil, valves, and cocks (Sec. 27; see also Sec. 38)	78, 85
— and lids, coal bunker (Sec. 30)	81
— cocks, and sea connections (pars. 34-39, Rules for Machinery)	103
— hawse and windlass (Sec. 37)	84
—— sounding, air, suction, &c. (Sec. 38, pars. 11–17)	86
Pitch pine, weather decks of (Sec. 23; see also Circular 852, page 158)	69
Plates, chain (Sec. 33)	82
Plating, outside (Sec. 19; see also Table S 2)	63, 64
breadth of overlaps of edges and butts (Sec. 21, par. 4; see also Table S 8)	67
butts and edges of, planing, shearing and caulking (Sec. 19, par. 7)	64
in steamers having a tonnage co-efficient of '78 or having a full form at the	
fore part, 2 strake of outside plating, midship thicknesses, to be maintained	
forward (Sec. 19, par. 1; Sec. 24, pars. 18, 35 & 41)	63, 73, 75, 76
——————————————————————————————————————	64
—— of sailing vessels, reduction in thickness of (Sec. 19, par. 1)	63
reduction in thickness of (Sec. 19, par. 1; see also Table S 2)	63
	64
when double bottoms and cellular double bottoms are fitted (Sec. 24, pars. 18, 34 & 41)	73, 75, 76
—— of bulkheads, thickness of (Sec. 22, par. 6; see also Table S 1)	68
in way of hatchways (Sec. 23, par. 20, and Sec. 28, par. 3)	
Poops, forecastles & bridge-houses, scantlings for (Sec. 44; see also Tables S 2 & S 4)	71, 79
Poop and bridge house bulkheads (Sec. 44, pars. 4 & 5)	93
Ports and scuppers, number of, how fitted, &c. (Sec. 31)	81
Ports, freeing port area in "well" deck vessels (Sec. 31, par. 4)	. 81
Posts, stem, stern and propeller, keel, and transoms (Sec. 5)	43, 44
Propeller shaft, when to be examined (Par. 65)	111
stern bush and fastenings of the sea connections, when to be examined (Par. 64)	111
Proportions, vessels of extreme (Sec. 46; see also Table S 6)	96
to have additional strength (Sec. 41, par. 12; Sec. 42,	
nars, 17-19: and Sec. 46)	89, 91, 96

Proving Establishments under the control of Lloyd's Register (Notice No. 851; see also Table 22)	158
Pumping arrangements (Sec. 38)	85, 86
All hand pumps (Par. 7)	85
Air pipes to each ballast tank (Par. 12)	86
Bilge injections, size of (Par. 16)	86
Bilge suctions, Table of sizes (Par. 17)	86
Cock and valves to be fitted in accessible places (Par. 13)	86
Engine and boiler space (Par. 3)	85
Fore and after peaks (Par. 5)	85
Hand pumps (<i>Pars. 2, 3, & 7</i>)	85
Holds with double bottoms (Par. 2)	85
Holds without double bottoms (Par. 3)	85
Pipes for bilge or ballast suctions, joints of (Par. 14)	86
Sluice valves or cock, not to be fitted to the collision bulkhead (Par. 8)	86
Sluice valves or cocks, if fitted to Engine room or other W.T. bulkheads(Par. 9)	86
Sluice valves when fitted, to be arranged so as to be controlled above load line	
(Par. 10)	86
Sounding pipes to be fitted on each side of holds and ballast tanks (Par. 11)	86
a doubling plate to be fitted under each (Par. 11)	86
Suction pipes to peaks, and tunnel well, diameter of (Par. 15)	86
Tunnel well to be cleared by a steam pump suction (Par. 6)	85
Engine (see Rules for Machinery)	101
Pumps, head and stern (Sec. 27, par. 5; see also Sec. 38)	78, 85
Punching holes for rivets (Sec. 6, par. 3; Sec. 21, par. 6)	45, 67
Q.	
Quadrants, steering and tillers, etc. (Sec. 36, pars. 7 & 16)	84
of cast steel and tests for same (Sec. 5, pars. 12 & 13;	
Sec. 36, pars. 17 & 18)	44, 84
Quality of steel (Sec. 3)	41-43
————— for rivets (Sec. 3, par. 15)	43
	46
— workmanship (Sec. 4)	43
Quarter decks, raised and sunk forecastles (Sec. 45)	94, 95
—— pillars (Sec. 13 & Sec. 15)	50, 60
R.	
Raised quarter decks (Sec. 45; see also Sketches, pages 137, 138)	94, 95
break bulkheads (Sec. 45, pars. 3, 6, 8, 9, 10 & 11)	94, 95
brackets to (Sec. 45, pars. 3 & 10)	94, 95
	b

and the distriction of Shiffing.	
Raised quarter decks break bulkheads, web plates to (Sec. 45, par. 6)	PAGE 95
when plating No. exceeds 20,000, or over 13 depths	
(Sec. 45, par. 9)	95
diaphragm plates, number of (Sec. 45, par. 5)	95
doubling of sheerstrake (Sec. 45, pars. 4 & 12)	94, 95
scarphs of deck plating (Sec. 45, pars. 5 & 7)	95
side plating, and doubling of (Sec. 45, pars. 1, 4, 5 & 7)	94-96
vessels, iron or steel decks in (Circular No. 847)	157
when Web-frames are adopted (Sec. 14, par. 34; Sec. 14a, pars. 16-20; see also Sketches, page 137)	57, 58, 59
when deep framing is adopted (Sec. 14b, par. 7)	57
Reduction in thickness of bulkhead plating, upper part (Sec. 22; see also Table S1)	68
floor plates (Sec. 7; see also Table S 1)	45
keelson and stringer angles (Sec. 12, par. 5)	50
middle line keelson plates (see Table S 3 after page 145)	_
outside plating (Sec. 19, par. 1; see also Table S 2)	63
in sailing vessels (Sec. 19, par. 1)	63
stringer plates (Sec. 16; see also Table S 5)	61
Red line expunging class from non-compliance with Rules (Par. 13)	34
Refrigerating machinery and appliances (Notice No. 999)	117-122
Register Book printed annually	25
———— periodically posted	25
———— subscriptions	25
supplements	25
Register Books formerly printed	25
Repairs necessary in consequence of damage, notice of (Footnote)	34, 112
—— notice to be given in writing	27
—— performed under superintendance of Surveyors	27
—— suggested by the Surveyors, appeal against	28
Reported defects, expunging of class on account of (Par. 14)	. 34
Reports of survey to be made by Surveyors	27
access to them	27
—— on vessels (Sec. 40)	88
, copies of	27
Reversed angle bars on frames (Sec. 8; see also Table S 1)	46, 47
in engine and boiler spaces (Sec. 8, par. 6; Sec. 26, par. 4)	46, 76
rivets securing, to frame and floor plate (Sec. 8, par. 8)	47
frames in way of forecastle (Sec. 8, par. 10; Sec. 44, par. 8; Sec. 45, par. 2)	47, 93, 94
in the case of awning deck vessels (Sec. 2, par. 4; Sec. 43, par. 7 & footnote on Table S 6)	40, 92
when plating number exceeds 35,000 and exceeding 16 depth, &c. (Sec. 46, Footnote and Table S 6)	96

INDEX.	xxvii
INDEX.	VVAII

Rider plate to middle line keelson (Sec. 9, 7 ars. 1 & 2)	47
Rigging, (Sec. 39; see also Table 11 after page 137)	87
examination of, at special survey No. 3 (Paragraph 3)	37
steel wire standing, tests for (see Table 11 after page 145)	_
—— mast, and spars (Sec. 39, par. 1)	87
and sails of sailing vessels, reported defects, class expunged	
with a black line (Par. 14)	34
of sailing vessels, non-compliance with rules as regards survey,	
class expunged with a red line (Par. 13)	34
Riveting and rivets (Sec. 21; see also Table S 8)	66, 67
Rivets, spacing of (Sec. 21; see also Table S 8)	66, 67
in steamers having a full form at the fore part (Sec. 21, par. 6)	67
in side plate rudders, size and spacing of (Sec. 21, par. 10; Sec. 36, par. 2	67, 83
	51
number and size in angles connecting floors and outside bracket plates of double	
bottoms to margin plates (see Table S 7, after page 145)	_
quality of (Sec. 3, par. 15; Sec. 21, par. 10)	43, 67
—————— steel used for (Sec. 3, par. 15)	43
Rivet holes in frames (Sec. 6, par. 3)	45,
to be regularly and equally spaced, &c. (Sec. 21, par. 6)	67
Rudders and steering gears (Sec. 36; see also Table S 3 for rudders with side plates,	
and Table S 3A for single plate rudders, and Table S 3B for steering	
gears, etc.	82-84
thickness of plating for side plates of (Sec. 36, par. 1)	82
Rudder braces to be forged on the sternpost, spacing and size of (Sec. 5, par. 11)	44
depth and thickness of (Sec. 5, par. 11)	44
	44
frame and main piece to be one forging (Sec. 36, par. 2)	83
——— gudgeons, depth and thickness of (Sec. 36, par. 6)	83
——heads for steam vessels, formula for (see Table S 3 and S 3A after page 145)	_
heads and pintles, etc., for spar-deck vessels (Sec. 36, par. 1; Sec. 42, par. 16)	82, 91
——— plates, size and spacing of rivets, securing plates to frame (Sec. 36, par. 2)	83
—— pintles, spacing of (Sec. 36, par. 2)	82
——————————————————————————————————————	
Table $(S, 3A)$	83
solid cast steel rudders, steering quadrant and tillers, and test for same) (Sec. 5,	
pars. 4, 12 & 13; Sec. 36, pars. 17 & 18)	44, 84
Rules, non-compliance with, as regards surveys, class expunged with a red line (Par. 13)	34
—— price of (see list of publications)	ii
——————————————————————————————————————	27

S.

Sailing vessels, beam knees of, to be turned (Sec. 13, par. 13)	51 51 50, 60
reduction in thickness of plating at ends of (Sec. 19, par. 1)	63
strake of plating in way of hold beam increased one-twentieth (Sec. 19, par. 1) three strakes at the bilge to be increased one-twentieth all fore and aft	63
(Sec. 19, par. 1)	63
expunging of class with Red line for non-compliance with rules (Par. 13)	34
Black line from reported defects (Par. 14)	34
Sails, rigging, masts and spars, to be maintained in good order (Sec. 39, par. 1)	87
Scantlings, numerals for, how obtained for all types of vessels (Sec. 2)	40
Screw shaft, when to be examined (Par. 65 and footnote)	111.
Scuppers and ports (Sec. 31)	81
Scuttles fitted in sheerstrakes, compensation for (Sec. 32, par. 3)	82
——————————————————————————————————————	82
Sea connections, cocks, and pipes (Pars. 34 to 39 of Rules for Machinery)	103
Shaft, stern or screw, when to be examined (Par. 65 and footnote)	111
Shaft tunnel, construction and thickness of (Sec. 26, par. 8)	78
testing of (Sec. 26, par. 8)	78
to be strengthened in way of pillars (Sec. 15, par. 12)	61
——— watertight door on engine room bulkhead (Sec. 26, par. 8)	78
Sheerstrake, extension above upper deck beam (Sec. 19, par. 9)	64
compensation for cutting scuttles in (Sec. 32, par. 3)	82
at break of poop (Sec. 44, pars. 7 & 11)	93
at break of raised quarter deck (Sec. 45, pars. 3 & 4)	94
doubled because of extent of erections (Sec. 44, pars. 7, 11 & 13; Sec. 45,	
pars. 4 & 12)	93, 94, 95
doubling of, for vessels of extreme proportions (see Table S 6)after	145
increased thicknesses in lieu of doubling (Sec. 44, par. 13, and footnote,	
Table S 6)	94
Shifting beams in cargo hatchways, sketch showing arrangement of	141
Side keelsons (Sec. 11; see also Table S 3)	49, 50
in way of double bottoms or part double bottoms (Sec. 11, par. 3)	49
- intercostal plates in way of double bottoms or part double bottoms (Sec. 11,	
pars. 3 & 4)	49, 50
at fore part of a steamer of full form (Sec. 11, par. 1)	49
— plating of awning deck vessels (Sec. 43, par. 8; see Table S 2)	92

INDEX. XXIX

	PAGE
Side plating of Poop, Bridge and Forecastles (see Table S 2)	
Raised Quarter Deck (Sec. 45, pars. 1, 4, 5 & 7)	94, 95
doubling of (Sec. 45, pars. 4, 5 & 7)	95
Sheerstrake and Stringer plate of Bridge increased when doubling of the	0.1
Sheerstrake is dispensed with (Sec. 44, par. 13)	94
—— Stringers and web frames in lieu of hold beams (Sec. 14a)	57
and deep framing in lieu of hold beams (Sec. 14b)	59
Single plate rudders for steamers and sailing vessels (Sec. 36, pars. 4 & 5; see also	
Table S 3A)	83
Sketch showing arrangement of at break of raised quarter deck	140
connection of side stringers to watertight bulkheads	139
diamond shaped bulkhead liner or doubling plate between	
frame and outside plating	145
engine and boiler casings	142
——————————————————————————————————————	138
shifting beams in cargo hatchways	141
————— web frames and side stringers	134–137
——————————————————————————————————————	143, 144
——— illustrating method of determining the depth of Turret deck vessels	131
——————————————————————————————————————	132, 133
Skylights, engine room (Sec. 29, par. 6)	80
Sluice valve or cock to water-tight bulkheads (Sec. 27, pars. 1-3; Sec. 38, pars. 5, 8-10)	78, 85, 86
not to be fitted to the collision bulkhead (Sec. 27, par. 1; Sec. 38,	
par. 8)	78, 86
Sounding, air and suction pipes, &c. (Sec. 38, pars. 11-17)	86
——— pipes, doubling plate under (Sec. 38, par. 11)	86
Soil pipes, valves and cocks (Sec. 27; see also Sec. 38)	78, 85
Society, members of	26
Spacing of frames from 20 to 27 inches, according to size of vessel (Sec. 6, par. 4; see	
also Table S. 1)	45
around the stern, at the knuckle (Sec. 6, par. 4)	45
beams and stringers in hold (Sec. 14)	52-57
	50, 62
———— web-frames and stringers in lieu of hold beams (Sec. 14a)	57, 59
rivets (Sec. 21; see also Table S 8, after page 145)	66, 67
Spar-decked steam vessels (Sec. 42)	90, 91
when wood main deck is omitted (Sec. 42, pars. 21 & 22)	91
——————————————————————————————————————	91
Spare gear (Rules for Machinery, par. 40)	103
— steering gear (Sec. 36, par. 7)	83
Spars masts, and rigging (Sec. 39, par 1 for scantlings, &c. see Tables 9, 10 & 11)	87

LLOYD'S REGISTER OF SHIPPING.	
Spars, masts, and rigging, non-compliance with rules as regards survey, class expunged	PAGE
with a red line (Par. 13)	34
reported defects, class expunged with a black line (Par. 14)	34
Special surveys, Vessels and Machinery built under, distinctive mark	38, 39, 99
——— on ships damaged, &c.	28
————— fees for new vessels	29
machinery	29
periodical survey fees for Nos. 1, 2 & 3	30
machinery	30
Stays to bulwark plating (Sec. 19, par. 12; Sec. 31, par. 2)	
Steam vessels, three decked (Sec. 41)	88, 89
spar decked (Sec. 42)	90, 91
Steamers having a co-efficient of '78 or having a full form at the fore part (Sec. 6, par. 1; Sec. 11, par. 1; Sec. 19, par. 1; Sec. 21, par. 6; Sec. 24, pars. 2, 14, 18, 22, 35, 37 & 41)	
Steel for shipbuilding purposes	.41-43
quality of (Sec. 3, pars. 1–9)	41, 42
supplied in ingots (Sec. 3, par. 9)	42
tests for material used (Sec. 3, pars. 10–14)	42, 43
to be stamped by manufacturers (Sec. 3, pars. 1–10)	41, 42
after testing (Sec. 3, pars. 2 & 7)	41, 42
for rivets (Sec. 3, par. 15)	43
— for machinery purposes	98, 100, 102
— castings for machinery and tests for same (Par. 33)	102
— for boilers, tests of material (Par. 19)	100
— cast, mast caps (Circular No. 536)	151
— cast for anchors, test for (Circular No. 647)	127, 128
stern frames, rudders, steering quadrants and tillers (Sec. 5, pars. 12 &	
13; Sec. 36, pars. 3, 4, 17 & 18)	44, 83, 84
—— decks (Sec. 23, pars. 13-24; see also Table S 5)	70, 71
— manufacturers, list of	129-130b
— or iron decks to be caulked (Sec. 23, par. 18)	71
decks in raised quarter deck vessel (Circular No. 847)	157
decks, how noted in the Register Book (Sec. 23, pars. 22 & 23; see also Key to Register Book)	71
— tests of, for masts, bowsprits and yards, when of steel (see Par. 3 of footnotes to Table 9, after page 145)	N. Banchians
- vessel, dry docking within 6 months after launching (Sec. 4, par. 3; see also Circular	
No. 705, page 154)	43
— wire standing rigging, and tests for (see Table 11, after page 145).	
——————————————————————————————————————	

INDEX. XXXI

	PAGE	
Steering gear, (Sec. 36, pars. 7-16, and Table S 3b)	83, 8	84
vessels which have not two independent gears to have spare tiller and		
spare gear ready for use (Sec. 36, par. 7)	83	
and its connections to be carefully examined (ss. Nos. 1, 2 & 3)	36,	37, 38
in steamers above 250 feet in length, the after steering wheel and gear to		
be protected (Sec. 36, par. 10)	83	
when combined hand and steam (Sec. 36, par. 8)	83	
quadrants, tillers, rods, steering chains, springs or buffers, blocks, &c. (Sec. 36,		
pars. 8, 11–15)	83	
quadrants and tillers of cast steel and test for same (Sec. 36, pars. 17 & 18;		
Sec. 5, pars. 12 & 13)		
Stem and sternposts (Sec. 5; see also Table S 2)		44
if scarphed, length of scarph (Sec. 5, par. 1)	43	
length of scarph with flat plate keels (Sec. 5, pars. 7 & 9)	44	
Stern frames, when of cast steel, and tests for same (Sec. 5, pars. 12 & 13)	44	
when in more than one piece, length of scarphs (Sec. 5, par. 12)	44	
— bush, propeller and fastenings of sea connections, when to be examined (Par. 64)	111	
shaft, when to be drawn for examination (Par. 65 & footnote)	111	
—— post, rudder braces to be forged on (Sec. 5, par 11)	44	
Stringers in hold and bilge keelsons (Secs. 10, 12, 14, 14a & 14b)	, 50, 8	52, 57, 59
spacing of (Secs. 14, 14a & 14b)	52-	
——————————————————————————————————————	- 50	
at ends to be connected to hooks and crutches (Sec. 18)	62	
at ends of vessels, spacing of (Sec. 12, par. 4)	50	
at break of raised quarter deck (Sec. 45; see also sketch on page 140)	94,	95
beam and hold stringers in way of raised quarter decks (Sec. 45, par. 4)	94	
——— on beams (Sec. 16; see also Table S 5, after page 145)	61	
bracket plates to, when beams exceed two frames paces apart (Sec. 14,		
par. 30)	56	
panting beams and (Sec. 18)	62	
side, in hold, bracket plate to, when web frames are fitted (Sec. 14a, par. 7)	57	
when height between deck stringers at sides is 8 ft. and above (Sec. 14, par. 29)	56	
spar deck vessels		
(footnote)	90	
exceeds 8 ft., when deep framing		
is adopted (Sec. 14b, par. 6)	60	
Stringer angle bars in way of bridge houses, poops, and forecastles (Sec. 16, par. 7)	62	
—— plate at break of poop (Sec. 44, par. 7)	93	
double angle bars in forecastle 'tween decks (Sec. 8, par. 10; Sec. 44, par. 8)	47,	93
——————————————————————————————————————	64	
when double butt straps are fitted, thickness of straps (Sec. 20, par. 14)	66	

LLOYD'S REGISTER OF SHIPPING.	
Subscriptions, annual	PAGE 25
Surveyors, how appointed	
may be employed on special surveys when specially requested by Shipowners	26
or Underwriters	20
	28
to give notice when on survey it is proposed to reduce the character assigned	
to a vessel	27
suggested repairs, appeal against their requisition	28
Survey, while building, special of hull and machinery (also Sec. 1, par. 1)	38, 39, 99
of vessels not built under survey, with a view to classification (Sec. 47)	96
annual (Par. 1)	33
of machinery and boilers	111, 112
special periodical, every four years for vessels classed 100A to 90A (Par. 17)	34
every three years for vessels classed A (Par. 19)	34, 35
the date when they respectively become due (Pars. 17 & 18)	35
——————————————————————————————————————	. 35
Surveys, special periodical, notice of (footnote)	34, 112
No. 1	35
No. 2	36
No. 3	37
No. 3, second special survey	38
of parts of vessel in anticipation of Special Survey (Par. 20)	35
nortion only of requirements complied with provided some	00
be completed within 12 months (Par. 21)	35
when a special survey is only partially held, notice to	00
owners of parts not surveyed (Par. 22)	95
	35
when rules not complied with, class expunged with a red line	
(Par. 13)	34
when it is found from reported defects, class expunged with	
a black line (Par. 14) ·	34
of bottom plating (footnote)	35, 36, 37
——————————————————————————————————————	38, 39, 111, 112
when not complied with, class	
expunged with a red line	
(Par, 13)	34
——————————————————————————————————————	
defects, class expunged with	
a black line (<i>Par. 14</i>)	34
for vessel classed in the late Underwriters' Registry	123-125
of Engines and Boilers of vessels classed in the late Under-	
writers' Registry (see Circulars Nos. 689 & 834)	149, 150

Surveys, special periodical, fees for Nos. 1, 2 & 3 (Par. 7)	INDEX.	
T. Table S 1.—Minimum dimensions of frames, spacing of frames, reversed frames, floor-plates, bulkheads, and pillars		PAGE 30
Table S 1.—Minimum dimensions of frames, spacing of frames, reversed frames, floor-plates, bulkheads, and pillars	machinery	30
Table S 1.—Minimum dimensions of frames, spacing of frames, reversed frames, floor-plates, bulkheads, and pillars	of repairs of damage at ports abroad (see Circular No. 636)	153
Table S 1.—Minimum dimensions of frames, spacing of frames, reversed frames, floor-plates, bulkheads, and pillars		
Table S 2.—Minimum dimensions of keels, stems, stern-posts, and outside plating Table S 3.—Minimum dimensions of keelsons, keelson and stringer angles, decks, radders, and ceiling	T.	
Table S 2.—Minimum dimensions of keels, stems, stern-posts, and outside plating Table S 3.—Minimum dimensions of keelsons, keelson and stringer angles, decks, radders, and ceiling	Table S 1.—Minimum dimensions of frames, spacing of frames, reversed frames,	
Table S 2.—Minimum dimensions of keels, stems, stern-posts, and outside plating ** ** * * * * * * * * * * * * * * *		145
Table S 3.—Minimum dimensions of keelsons, keelson and stringer angles, decks, radders, and ceiling		
Table S 3.—Minimum dimensions of keelsons, keelson and stringer angles, decks, rudders, and ceiling		145
rudders, and ceiling		
Table S 3 A.—Single plate radder for steamers and sailing vessels		145
Table S 4.—Dimensions of beams		
Table 8 6.—Additions beyond the requirements contained in the Rules, for vessels of greater proportionate length to depth than in vessels for which the ordinary scantlings are provided	Table S 4.—Dimensions of beams	145
of greater proportionate length to depth than in vessels for which the ordinary scantlings are provided	Table S 5.—Minimum dimensions of stringer plates, steel decks, and tie-platesafter	145
ordinary scantlings are provided after 145 Table S 7.—Scantlings for double bottoms constructed on the cellular system after 145 Table S 8.—Showing diameters and spacing of rivets and breadth of straps, lapped butts, and edge laps after 145 Table No. 9.—Showing sizes and scantlings for masts and bowsprits for sailing vessels and full-rigged steam vessels. after 145 Table No. 10.—Showing sizes and scantlings for yards and topmasts of sailing vessels and full-rigged steam vessels. after 145 Table No. 11.—Showing sizes and tests for steel wire standing rigging, &c., of sailing ships after 145 Table No. 12 of anchor cranes and boats' davits after 145 Table No. 22 of chains and anchors for steam and sailing vessels after 145 Table No. 14 for steam vessel classed in the late Underwriters' Registry 126 Tanks, water ballast, construction of (Sec. 24) 71–76 testing of (Sec. 24, pars. 3-5; see also S.S. Nos. 1, 2 & 3, pages 35–38) 71 of petroleum carrying vessels, test for (Circular No. 722) 155 when used for carrying water ballast (Circular No. 831) 156 Teak decks (Sec. 23, par. 8; see also footnote (a) to Table S3) 70	Table S 6.—Additions beyond the requirements contained in the Rules, for vessels	
Table S 7.—Scantlings for double bottoms constructed on the cellular systemafter 145 Table S 8.—Showing diameters and spacing of rivets and breadth of straps, lapped butts, and edge laps	of greater proportionate length to depth than in vessels for which the	
Table S 8.—Showing diameters and spacing of rivets and breadth of straps, lapped butts, and edge laps	ordinary scantlings are provided	145
butts, and edge laps	Table S 7.—Scantlings for double bottoms constructed on the cellular systemafter	145
Table No. 9.—Showing sizes and scantlings for masts and bowsprits for sailing vessels and full-rigged steam vessels. after 145 Table No. 10.—Showing sizes and scantlings for yards and topmasts of sailing vessels and full-rigged steam vessels. after 145 Table No. 11.—Showing sizes and tests for steel wire standing rigging, &c., of sailing ships after 145 Table No. 12 of anchor cranes and boats' davits after 145 Table No. 22 of chains and anchors for steam and sailing vessels after 145 Table No. 14 for steam vessel classed in the late Underwriters' Registry 126 Tanks, water ballast, construction of (Sec. 24) 71–76 — testing of (Sec. 24, pars. 3-5; see also S.S. Nos. 1, 2 & 3, pages 35–38) 71 — of petroleum carrying vessels, test for (Circular No. 722) 155 — when used for carrying water ballast (Circular No. 831) 156 Teak decks (Sec. 23, par. 8; see also footnote (a) to Table S 3) 70 — record of in the Register Book (Circular No. 895) 159	Table S 8.—Showing diameters and spacing of rivets and breadth of straps, lapped	
and full-rigged steam vessels. after 145 Table No. 10.—Showing sizes and scantlings for yards and topmasts of sailing vessels and full-rigged steam vessels. after 145 Table No. 11.—Showing sizes and tests for steel wire standing rigging, &c., of sailing ships after 145 Table No. 12 of anchor cranes and boats' davits after 145 Table No. 22 of chains and anchors for steam and sailing vessels after 145 Table No. 14 for steam vessel classed in the late Underwriters' Registry 126 Tanks, water ballast, construction of (Sec. 24) 71–76 testing of (Sec. 24, pars. 3-5; see also S.S. Nos.1, 2 & 3, pages 35–38) 71 of petroleum carrying vessels, test for (Circular No. 722) 155 when used for carrying water ballast (Circular No. 831) 156 Teak decks (Sec. 23, par. 8; see also footnote (a) to Table S 3) 70 record of in the Register Book (Circular No. 895) 159		145
Table No. 10.—Showing sizes and scantlings for yards and topmasts of sailing vessels and full-rigged steam vessels.		
and full-rigged steam vessels. after 145 Table No. 11.—Showing sizes and tests for steel wire standing rigging, &c., of sailing ships after 145 Table No. 12 of anchor cranes and boats' davits after 145 Table No. 22 of chains and anchors for steam and sailing vessels after 145 Table No. 14 for steam vessel classed in the late Underwriters' Registry 126 Tanks, water ballast, construction of (Sec. 24) 71–76 — testing of (Sec. 24, pars. 3–5; see also S.S. Nos. 1, 2 & 3, pages 35–38) 71 — of petroleum carrying vessels, test for (Circular No. 722) 155 — when used for carrying water ballast (Circular No. 831) 156 Teak decks (Sec. 23, par. 8; see also footnote (a) to Table S3) 70 — record of in the Register Book (Circular No. 895) 159		145
Table No. 11.—Showing sizes and tests for steel wire standing rigging, &c., of sailing ships after 145 Table No. 12 of anchor cranes and boats' davits after 145 Table No. 22 of chains and anchors for steam and sailing vessels after 145 Table No. 14 for steam vessel classed in the late Underwriters' Registry 126 Tanks, water ballast, construction of (Sec. 24) 71–76 — testing of (Sec. 24, pars. 3-5; see also S.S. Nos.1, 2 & 3, pages 35–38) 71 — of petroleum carrying vessels, test for (Circular No. 722) 155 — when used for carrying water ballast (Circular No. 831) 156 Teak decks (Sec. 23, par. 8; see also footnote (a) to Table S3) 70 — record of in the Register Book (Circular No. 895) 159		
ships		145
Table No. 12 of anchor cranes and boats' davits .after 145 Table No. 22 of chains and anchors for steam and sailing vessels .after 145 Table No. 14 ————————————————————————————————————		
Table No. 22 of chains and anchors for steam and sailing vessels		
Table No. 14 — for steam vessel classed in the late Underwriters' Registry 126 Tanks, water ballast, construction of (Sec. 24) 71–76 — testing of (Sec. 24, pars. 3–5; see also S.S. Nos. 1, 2 & 3, pages 35–38) 71 — of petroleum carrying vessels, test for (Circular No. 722) 155 — when used for carrying water ballast (Circular No. 831) 156 Teak decks (Sec. 23, par. 8; see also footnote (a) to Table S3) 70 — record of in the Register Book (Circular No. 895) 159		
Registry		140
Tanks, water ballast, construction of (Sec. 24) 71–76 — testing of (Sec. 24, pars. 3–5; see also S.S. Nos. 1, 2 & 3, pages 35–38) 71 — of petroleum carrying vessels, test for (Circular No. 722) 155 — when used for carrying water ballast (Circular No. 831) 156 Teak decks (Sec. 23, par. 8; see also footnote (a) to Table S3) 70 — record of in the Register Book (Circular No. 895) 159		100
pages 35–38) 71 —— of petroleum carrying vessels, test for (Circular No. 722) 155 —— when used for carrying water ballast (Circular No. 831) 156 Teak decks (Sec. 23, par. 8; see also footnote (a) to Table S3) 70 —— record of in the Register Book (Circular No. 895) 159		11-10
of petroleum carrying vessels, test for (Circular No. 722) 155 when used for carrying water ballast (Circular No. 831) 156 Teak decks (Sec. 23, par. 8; see also footnote (a) to Table S3) 70 record of in the Register Book (Circular No. 895) 159		71
when used for carrying water ballast (Circular No. 831)		
831) 156 Teak decks (Sec. 23, par. 8; see also footnote (a) to Table S3) 70 — record of in the Register Book (Circular No. 895) 159		100
Teak decks (Sec. 23, par. 8; see also footnote (a) to Table S 3) 70 ———————————————————————————————————	0.000	156
————————————record of in the Register Book (Circular No. 895)		

U.

Underwriters' Registry for iron vessels, terms of amalgamation	148
	123-126
	126
——————————————————————————————————————	
The state of the s	149, 150
٧.	
Valves or cocks on bulkheads (Secs. 27 & 38)	78, 85
not to be fitted to the collision bulkhead (Sec. 27, par. 1; Sec. 38, par. 8)	78, 86
Ventilators to upper deck and through topsides (Sec. 32)	81, 82
Vessels classed 100A, 90A, &c.	33, 34
A, for River purposes only, towing, fishing and channel purposes (Pars.6-12)	33, 34
A, for channel purposes to have a minimum freeboard (Pars. 8 & 9)	33, 34
equipment for (Pars. 11 & 12; Sec. 39, pars. 3 & 4)	34, 87
	123
— above 39 feet in depth, plans to be submitted (Sec. 14, par. 29)	56
$32\frac{1}{2}$ with deep framing, plans to be submitted (Sec. 14b, par. 8)	60
— not built under survey (Sec. 47)	96
— reports on (Sec. 40)	88
— steam, three-decked (Sec. 41)	88-89
spar-decked (<i>Sec. 42</i>)	90, 91
when under 17 feet depth from top of keel, condition of class	, , , , , , , , , , , , , , , , , , , ,
(Sec. 42, par. 2)	90
— where height between decks is 8 feet or above (Sec. 14, par. 29)	56
three-deck and spar-deck, with deep	
framing, to be specially considered	
(Sec. 14b, par. 6)	60
	90
— steam, awning-decked	91-93
—— classed awning-decked, condition of class (Sec. 43, pars. 1-3)	91, 92
—— classed partial awning-deck, condition of class (Sec. 43, pars. 1-3)	91, 92
— of extreme proportions (Sec. 46, see also Table S 6)	96
— exceeding 16 depth to length, additional strengthening of (Sec. 46, par 3; see also	
footnote to section and on Table S 6)	96
— intended to load or discharge while lying aground (Par. 5; Sec. 7, par. 5;	
Sec. 10, par. 5)	33, 36, 49

W.

Warps, anchors, chains, &c. (Sec. 39; see also Table No. 22, after page 145) for steam vessels classed in the late Underwriters' Registry Wash-plates, thickness of, &c. (Sec. 11, par. 4)	87, 88 126 50 72
	50
———— in peaks, when used for water ballast (Sec. 24, par. 5)	
Water ballast tanks or double bottoms, construction of (Sec. 24)	71-76
testing of (Sec. 24, pars. 3-5; see also S.S. Nos. 1, 2 & 3, pp. 35-38)	71
Watercourses (Sec. 7, par. 6; Sec. 35, par. 1)	46, 82
Waterways, gutter (Sec. 16, par. 10; Sec. 19, par. 12)	62, 64
of new vessels to be tested (Sec. 23, par. 25)	71
size of angle bar at inner edge (Sec. 23, par. 6)	70
Web frames and side stringers in lieu of hold beams (Sec. 14a; see also Sketches,	10
pages 134-137)	57
———— in engine and boiler space (Sec. 14, par. 32; Sec. 14b, par. 5; Sec. 26,	91
pars. 4-6)	56, 59, 77, 78
Web plates to bulkhead at break of raised quarter deck (Sec. 45, pars. 6 & 7)	95
	151, 152
Well deck vessels, freeing port area in "well" (Sec. 31, par. 4)	81
Windlass (Sec. 37; see also Table S. 3)	84
Wing boards to self-trimming hatchways (Sec. 28, par. 7)	80
Withdrawal of class at Owner's request, indicated by three dots () (Par. 15)	34
Wood decks (Sec. 23; see also Table S 3)	69
their water-tightness of upper and weather decks to be tested (Sec. 23, par. 24)	71
——————————————————————————————————————	71
——————————————————————————————————————	71
pars. 1–5)	69, 70
fastenings of (Sec. 23, pars. 9 & 10; see also Table S 3, after page 145)	70
——— when to be renewed (Sec. 23, par. 12; see also S.S. Nos. 1, 2 & 3, pp. 35-38)	70
Workmanship, quality of (Sec. 3)	43
the black oxide or millscale must be removed (Sec. 3, par. 2)	43
Z.	

1 and channel bar	frames (see Table S 1 after page 145)	-
	sections, minimum thickness of webs and flanges (footnote to Table	
	S 1 after page 145')	

Sir John Glover, Chairm in.

Joseph Edward Street, Esq., Deputy-Chairman and Treasurer. George Lidgett, Esq., Chairman of the Sub-Committees of Classification.

MEMBERS ELECTED IN LONDON.

James George S. Anderson, Esq. Edward Beauchamp, Esq. G. Elliott Bromage, Esq. Marmaduke Hart Brooking, Esq. John Corry, Esq. S. I. Da Costa, Esq. Thomas L. Devitt, Esq. James Dixon, Esq. John Fenwick Fenwick, Esq. G. Dalton Hardy, Esq.

HENRY HASLAM, Esq.
AKROYD HYSLOP, Esq.
WILLIAM LUND, Esq.
ALLAN McGregor, Esq.
WILLIAM MILBURN, Jun., Esq.
GERARD FREDERICK MILLER, Esq.
HERBERT DE ROUGEMONT, Esq.
JOHN HENRY TOD, Esq.
LEONARD CHARLES WAKEFIELD, Esq.
WILLIAM YOUNG, Esq.

Charles Hermann Goschen, Esq., Chairman of the Committee of Lloyd's. G. Butler Paul, Esq., Chairman of the General Shipowners' Society.

MEMBERS ELECTED AT THE PRINCIPAL OUTPORTS.

Thomas Rome, Esq., Chairman of the Liverpool Committee.

W. A. Williams, Esq., Deputy-Chairman of the Liverpool Committee.

John S. Allen, Esq.

J. H. Beazley, Esq.

Samuel Cross, Esq.

David Fernie, Esq.

LIVERPOOL.

H. T. WALLACE, Esq.

ABERDEEN—ALEXANDER P. HOGARTH, Esq.
BELFAST—The Rt. Hon. W. J. PIRRIE, LL.D.,

Representative for Ireland.

BRISTOL-MARK WHITWILL, Esq.

JOHN RANKIN, Esq.

CARDIFF Sir John Gunn.
Col. Sir Edward S. Hill, K.C.B., M.P.

DUNDEE—CHARLES BARRIE, Esq.

HARTLEPOOL WILLIAM C. GRAY, Esq. ROBERT ROPNER, Esq.

HULL-HENRY SAMMAN, Esq.

GLASGOW.

George Munro Kerr, Esq., Chairman of the Glasgow Committee.

A. Scott Brown, Esq., Deputy-Chairman of the Glasgow Committee.

HENRY BELL, Esq. The Hon. James C. Burns.

WILLIAM LAW, Esq.

DUGALD MACDOUGALL, Esq.

ROBERT MACKILL, Esq.
JAMES B. ORR, Esq.

LEITH-JAMES CORMACK, Esq.

SUNDERLAND RALPH M. HUDSON, Esq. SIR JAMES LAING.

SWANSEA & T. R. W. Mason, Esq.

TEES PORTS & WHITBY

J. MILNER LENNARD, Esq.

TYNE DISTRICT { J. B. ADAM, Esq. J. D. MILBURN, Esq. E. H. WATTS, Esq.

MEMBERS ELECTED TO SERVE ON THE TECHNICAL COMMITTEE AS REPRESENTATIVES OF SHIPBUILDERS, ENGINEERS, AND STEEL MAKERS.

ELECTED BY THE INSTITUTION OF NAVAL ARCHITECTS.

J. Dunn, Esq. | F. Elgar, Esq., LL.D., F.R.S. | J. Sampson, Esq. | A. E. Seaton, Esq. elected by the institution of shipbuilders and engineers of the north-east coast of england. J. W. Reed, Esq. | R. Thompson, Esq. | J. Tweedy, Esq. | H. Withy, Esq.

ELECTED BY THE INSTITUTION OF ENGINEERS AND SHIPBUILDERS IN SCOTLAND.

SINCLAIR COUPER, Esq. | J. GILCHRIST, Esq. | JOHN INGLIS, Esq., LL.D. | J. WARD, Esq. ELECTED BY THE IRON AND STEEL INSTITUTE.

DAVID EVANS, Esq.

TRUSTEES.

MARMADUKE HART BROOKING, Esq. Sir John Glover.
S. I. Da Costa, Esq. Joseph Edward Street, Esq. Leonard C. Wakefield, Esq. Bankers.

THE NATIONAL PROVINCIAL BANK OF ENGLAND (Lim.).

CHIEF SHIP SURVEYOR.

HARRY J. CORNISH, Esq. SECRETARY.

CHIEF ENGINEER SURVEYOR.

JAMES T. MILTON, Esq., M.Inst.C.E.

A. G. DRYHURST, Esq.

Office: -2, White Lion Court, Cornhill, London. -2nd July, 1900.

LIVERPOOL COMMITTEE.

THOMAS ROME, Esq., Chairman.

W. A. WILLIAMS, Esq., Deputy-Chairman.

JOHN S. ALLEN, Esq. W. BATES, Esq. J. H. BEAZLEY, Esq. J. T. BINNING, Esq. JOSEPH CHADWICK, Esq. W. J. CHAMBERS, Esq. SAMUEL CROSS, Esq. JOHN DAVIES, Esq. DAVID FERNIE, Esq. JOHN RANKIN, Esq. W. B. SPROULE, Esq. WILLIAM THOMSON, Esq. H. T. WALLACE, Esq. JOHN WILLIAMSON, Esq.

MEMBER OF THE COMMITTEE, EX-OFFICIO.

HENRY H. GRAYSON, Esq., Chairman of the Shipbuilders' Association.

PRINCIPAL SURVEYOR .-- R. WILLIAMSON, Esq.

Office:—No. 12, Oriel Chambers, Water Street, Liverpool.
2nd July, 1900.

GLASGOW COMMITTEE.

1900-1901.

G. Munro Kerr, Esq., Chairman.

A. Scott Brown, Esq., Deputy-Chairman.

HENRY BELL, Esq.
The Hon. James C. Burns.
J. D. Clink, Esq.
H. M. Colvil, Esq.
F. C. Gardiner, Esq.

JOHN R. KAY, Esq. WILLIAM LAW, Esq. DUGALD MACDOUGALL, Esq. T. W. McIntyre, Esq. ROBERT MACKILL, Esq. JAMES B. ORR, Esq. JOHN WATT, Esq. ANDREW WEIR, Esq.

PRINCIPAL SURVEYOR.—THOMAS J. DODD, Esq.

Office:—342, Argyle Street, Glasgow. 2nd July, 1900.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

SURVEYORS.

THE SURVEYORS AT THE FOLLOWING PORTS ARE EXCLUSIVELY THE OFFICERS OF THE SOCIETY, AND ARE NOT PERMITTED TO ENGAGE IN ANY OTHER BUSINESS OR EMPLOYMENT WHATSOEVER.

CHIEF SHIP SURVEYOR OF LLOYD'S REGISTER	HARRY J. CORNISH
Assistants to Chief Ship Surveyor	GEORGE STANBURY S. J. P. THEARLE
CHIEF ENGINEER SURVEYOR OF LLOYD'S REGISTER	JAMES T. MILTON
Assistant to Chief Engineer Surveyor	J. E. STODDART

LONDON DISTRICT.

(Embracing also Shoreham, Wivenhoe, Brightlingsea, Harwich, Ipswich, Lowestoft, Yarmouth, King's Lynn, Ramsgate, Margate, Deal and Dover.)

(Telegrams, Committee.)

PR	INCIPAL SURVEYOR	George P. Co	oper
SHIP SURY	YEYORS.	ENGINEER SURVE	YORS AND SHIP AND
	J. Bruhn		SURVEYORS.
C. Buchanan	S. O. Kendall	D. Ritchie	C. M. B. Dyer
Geo. R. Mares	J. W. Isherwood	T. R. Blackie	
E. J. Tierney	G. L. Brown	E. M. Salmon	P. l. Adie
James H. Truscott	R. B. Watt	R. Balfour	J. M. Buchanan
T. Shilston	B. J. Ives	F. L. Sturgeon	
J. D. Mares		DRAUGHTSMAN-	David S. Hunter

Examiner of Masts, Spars and Rigging-H. J. West

OUTPORTS.

BANGOR with Carnarvon and Holyhead (Address, Kildare House, Holyhead Road, Bangor) BARROW with Ulverston, Whitehaven, Workington and Maryport Ship Surveyor	ABERDEEN	with Banff, Peterhead, and Fraserburgh				
BARROW With Ulverston, Whitehaven, Workington and Maryport Ship Surveyor Ship and Engineer Surveyor Ship Surveyor (Office, Ramsden Square, Barrow) BARRY Ship and Engineer Surveyors Ship Surveyor (Office, Dock Chambers, Barry Dock) BELFAST Ship Surveyors Ship and Engineer Surveyor. (Office, Dock Chambers, Barry Dock) BELFAST Ship Surveyors Ship and Engineer Surveyor. (Office, 53, Waring Street) Residing at Appledore. Residing at Appledore. Ship and Engineer Surveyor W. L. Sharpe J. Easthope William J. Darling H. E. Tilston T. G. Baker (Office, 53, Waring Street) Ship and Engineer Surveyor C. Cooper		Ship and Engineer Surveyor } J. G. Hunter				
BARROW With Ulverston, Whitehaven, Workington and Maryport Ship Surveyor Ship and Engineer Surveyor Office, Ramsden Square, Barrow BARRY Ship and Engineer Surveyors Ship Surveyor Office, Dock Chambers, Barry Dock BELFAST Ship Surveyors Ship and Engineer Surveyor. Ship and Engineer Surveyor Office, Dock Chambers, Barry Dock Ship Surveyors Office, 53, Waring Street With Barnstaple and Appledore Residing at Appledore. With Gloucester and Bridgwater Ship and Engineer Surveyor W. L. Sharpe J. Easthope William J. Darling H. E. Tilston T. G. Baker Office, 53, Waring Street G. Westcott C. Cooper	*	(Office, 29, Regent Quay, Aberdeen)				
BARROW with Ulverston, Whitehaven, Workington and Maryport Ship Surveyor	BANGOR	with Carnarvon and Holyhead (Address, Kildare) Thomas Pilow				
Ship Surveyor	D	110 wse, 110 greene 10000, Danier				
Ship and Engineer Surveyor	BARROW	with Ulverston, Whitehaven, Workington and Maryport				
Belfast Ship and Engineer Surveyors		Ship Surveyor W. L. Sharpe				
Belfast Ship and Engineer Surveyors		Ship and Engineer Surveyor J. Easthope				
Ship Surveyor (Office, Dock Chambers, Barry Dock) BELFAST Ship Surveyors (Office, Dock Chambers, Barry Dock) Ship and Engineer Surveyor (James Turpin D. McAuslan R. J. Beveridge (Office, 53, Waring Street) With Barnstaple and Appledore (Office, 53, Waring Street) BRISTOL with Gloucester and Bridgwater Ship and Engineer Surveyor (C. Cooper		(Office, Ramsden Square, Barrow)				
Ship Surveyor	BARRY	Ship and Engineer Surveyors William J. Darling				
Belfast Ship Surveyors						
Belfast Ship Surveyors						
Ship and Engineer Surveyor Ship and Engineer Surveyor (Office, 53, Waring Street) With Barnstaple and Appledore Residing at Appledore. With Glowcester and Bridgwater Ship and Engineer Surveyor (D. McAuslan R. J. Beveridge G. Westcott C. Cooper	BELFAST	T m				
BIDEFORD with Barnstaple and Appledore Residing at Appledore. With Glowcester and Bridgwater Ship and Engineer Surveyor		/ D. McAuslan				
BIDEFORD with Barnstaple and Appledore G. Westcott Residing at Appledore. with Gloucester and Bridgwater						
Residing at Appledore. Bristol with Gloucester and Bridgwater Ship and Engineer Surveyor	T)	(Office, 53, Waring Street)				
Bristol with Gloucester and Bridgwater Ship and Engineer Surveyor C. Cooper	BIDEFORD	with Barnstaple and Appledore G. Westcott				
Ship and Engineer Surveyor C. Cooper	Paramor	Residing at Appledore.				
	DRISTOL	China and There's C				
(O/fice, 53, Queen's Square, Bristol)						
, , , , , , , , , , , , , , , , , , , ,		(Uffice, 53, Queen's Square, Bristol)				

SURVEYORS—continued.			
CARDIFF			Andrew K. Hamilton, Principal Surveyor. J. W. Scullard
Ship Surveyors (Offices, Merchan	ts' Exchange, Bute Docks, Care	diff)	D. Nicholas C. M. Smith (J. F. Walliker
	Ship and Engineer Surveyor) W. Sibun J. Pollock A. Boyd
Durin Shin and Engineer Surve	ulcaster Street St. Helier's, Jen yor		J. F. Picot J. Macwilliam
DUNDEE with Arbroath, Montrose,			W. Morrison
(Office, Maritime Br	Surveyor uildings, East Dock Street, Dur 	ndee)	R. Howie
FALMOUTH with all Ports on the	coast between Looe and Pade n, Porthleven, Penzance, St.	stow, Ives,	
Hayle, Portreath, and I Ship Surveyor	Newquay; also the Scilly Isl	ands	T. H. Sandry
Ship and Engineer Surve (Surveyors' Office, Pendennis H	ryor Touse, Lansdowne Road, Falmo	outh)	R. H. Cooper
and Girvan. (e, Ardrossan, Irvine, Troon, Office, 342, Argyle Street, Glas	Ayr,	Thomas J. Dodd, Principal Surveyor. Thomas S. Warren J. L. Sinnette T. J. House Henry Hand A. B. Wilson F. R. Noton R. Wright J. McIlvenna G. F. Robson
			W. H. Watson R. S. Rowntree G. D. Aitken A. B. R. Harris J. W. Grier
Principal Engineer Surv	eyor for Glasgow District		James Mollison W. R. Austin A. McKeand G. Murdoch J. W. Dimmock
. Engineer Surveyors and	Ship and Engineer Surveyors		J. Kerr H. G. Smith J. B. A. Common W. G. Minchin
			B. S. Murphy G. D. Ritchie
Inspectors of Forgings fo	or the Clyde District		W. Hamilton F. Cook

		Ü
SURVE	YORS—continued.	
GREENOCK A	ND PORT GLASGOW, with Rothesay	J. Craig
	Ship and Engineer Surveyors	Andrew C. Heron R. Elliott
	O BOSTON Ship and Engineer Surveyors (Office, Bank Chambers, 2, Freeman Street, Great Grimsby) AND WEST HARTLEPOOL, with Whitby and Scarborough Ship Surveyors (Office, Dock Office Buildings, Victoria Terrace,	B. G. Oxford A. C. Heron Charles Fowling, Principal Surveyor. E. C. Champness
	West Hartlepool) Engineer Surveyor, and Ship and Engineer Surveyors	R. Bennett R. Hirst W. J. Smith P. McGregor T. L. Thornton
HULL wi	th Gainsborough, Goole, Selby, Burton Stather and Knottingley Ship Surveyor	J. Thomson
	Ship and Engineer Surveyors	James Innes T. Robertson
1PSWICH (see LEITH	London). and Ports in the Frith of Forth, with Berwick-upon-Tweed Ship Surveyor (Office, 56, Constitution Street, Leith) Ship and Engineer Surveyors	•
LIVERPOOL	with Lancaster and all intermediate places, the River Mersey, Chester, and River Dee; also the Isle of Man Ship Surveyors (Office, 12, Oriel Chambers, Water Street, Liverpool; Telegrams, Register)	R. Williamson Principal Surveyor. C. E. Burney
	Engineer Surveyors, and Ship and Engineer Surveyors	Peter McGregor G. A. Milner J. Dykes C. I. Davidson
MANCHESTER	with Leeds, Farnley, and district (Office, 552, Chester Road, Old Trafford, Manchester) Ship and Engineer Surveyors	F. W. Pitt G. C. Vaux (Jesse Williams,
MIDDLESBROU	GH with Stockton Ship Surveyors (Office, Royal Exchange, Middlesbrough)	Principal Surveyor, W. H. Cooper O. Narbeth H. C. Farrar N. E. McClelland (John Sanderson
	Ship and Engineer Surveyors	R. Fowell J. Carnaghan R. D. Shilston

SURVEYORS-continued.

MILFORD HAVEN, PEMBROKE AND TENBY, with a district extending a s New Quay, inclusive—Ship and Engineer Surveyor	James Dennoim
NEWCASTLE-ON-TYNE with North and South Shields; also Blyth and H. Ship Surveyors	Thomas Phillips Principal Surveyor. James McNeil Thomas H. Cooke Charles Skentelbery W. L. Gilmour E. J. Milton J. Allan A. R. Sneddon T. Shaw
Engineer Surveyors and Ship and Engineer Surveyors Inspector of Forgings	W. S. P. Collings R. Langlands J. H. Heck G. L. Hindmarsh G. A. Hake R. Haig J. C. Turpin T. N. Wawn G. A. D. Toyne A. E. Farminer J. H. W. Marsden J. C. Craig
NEWPORT, MON. with Chepstow	} H. H. Ashton
Ship Surveyor	A. Munro
ORKNEYS (residing at Strongs † Mr. Baillie is not an exclusive Officer of the	
PLYMOUTH Ship and Engineer Surveyor (Office, 13, Excha	enge) George Duncan
PORTMADOC AND BARMOUTH with a district extending as far as, bu including, New Quay (residing at Portma	t not adoc) John W. James
Queenstown with Cork, Kinsale, Crookhaven, Castletown, Bar Valentia, Tralee, River Shannon and Limerick, as well a intermediate Ports (Address 24, The Beach, Queensto	s all \ J. W. Attridge
Sheffield with Birmingham, Newark, and district Ship and Engineer Surveyors (Office, Buckingham Chambers, St. James St., Shef	R. F. Morton L. G. Shallcross
SOUTHAMPTON AND SOUTH COAST from Littlehampton to Bridport incluates also the Isle of Wight Ship and Engineer Surveyor	sive, R W. Coomber
Ship Surveyor (Office, 3, Oriental Place, Southam	pton) C. Edwards

Sunderland	AND SEAHAM Ship Surveyors (Office, 56, John Street, Sunderland)	John Lawrence, Principal Survey George Harrison A. Campbell Holms T. S. Leathard T. S. Shute G. M. Shaw
	Engineer Surveyors and Ship and Engineer Surveyors	Patrick Salmon J. T. Findlay F. W. Fillmore
	Inspector of Forgings	Hugh Cameron
SWANSEA	with Neath and Llanelly Ship and Engineer Surveyor (Office, 1, Gloster Place, Swansea)	J. Barclay

Waterford Ship and Engineer Surveyor †Andrew Horn † Mr. Horn is not an exclusive Officer of the Society.

WEXFORD †R. J. Sparrow † Mr. Sparrow is not an exclusive Officer of the Society.

WHITEHAVEN (see BARROW.)

SURVEYORS—continued.

June, 1900.

LIST OF FOREIGN AND COLONIAL SURVEYORSHIPS OF LLOYD'S REGISTER ARRANGED IN THE FOLLOWING GEOGRAPHICAL ORDER OF COUNTRIES, VIZ.:-

1. Russia. 2. Norway. 3. Sweden. 4. Denmark. 5. Germany. 6. Holland. 7. Belgium. 8. France. 9. Spain and Portugal. 10. Azores. 11. Gibraltar.	12. ITALY AND AUSTRIA. 13. MALTA. 14. GREECE, TURKEY, TURKEY IN ASIA, AND ROUMANIA. 15. BRITISH NORTH AMERICA. 16. NEWFOUNDLAND. 17. UNITED STATES. 18. SOUTH AMERICA. 19. NORTH AFRICA. 20. CANARY ISLANDS.	 EGYPT AND RED SEA PORTS. SOUTH AFRICA. MAURITIUS. INDIA, BURMAH, AND STRAITS SETTLEMENTS. WEST INDIA ISLANDS. EAST INDIAN ARCHIPELAGO. CHINA AND JAPAN. AUSTRALIA, TASMANIA, AND NEW ZEALAND.
THE SURVEYORS AT THE FOLL SURVEYORS OF T	OWING PORTS DO NOT HOLD A	PPOINTMENTS AS THE EXCLUSIVE CASES MARKED *
	1. RUSSIA.	
BATOUM		
CRONSTADT AND ST. PETERSBURG		
HELSINGFORS Ship and Engineer S	urveyor (Address, 16, Alexandersgata	m) Hugo Lindfors
	veyor (Telegrams, Crookston, Odess and Engineer Surveyor for Sebastope	
	eer Surveyor au's Sagemuhle, Oscarstrasse, No. Telegrams, Buchhol	
SEBASTOPOL (See ODESSA).		
	2. NORWAY.	
Bergen Ship and Engineer Surv	veyor (Telegrams, Surveyo	r) S. A. Eide
CHRISTIANIA with a district extended Ship and Engineer So	ing from Fredrikshald to Lindesnæs urveyor (Address, 36, Skipper Gad TELEGRAMS, Surveyor, Christiand	le; \ O. C. Sanne
	3. SWEDEN.	
	Surveyor (Office, 6, Lazarettsgate low is exclusively an Officer of Lloyd's	
from Gefle to	Surveyor, with a district extendi Norrköping inclusive eppsmätningskontoret 46, Skeppsbro Telegrams, Lloyd's Registi	Albert Isakson

FOREIGN AND COLONIAL SURVEYORSHIPS—continued.

4. DENMARK.

COPENHAGEN Ship and Engineer Surveyor (Office, 22, Amaliegade, K.; Telegrams, Krebsof) Assistant Surveyors to Mr. Krebs:— Aalborg
Aalborg
Aalborg
Bremerhaven Ship and Engineer Surveyor for Weser District (Address, Burgermeister Smidstrasse, No. 110; Telegrams, Ferd. Thomsen Danzig (Address, Drehergasse, I; Telegrams, Bartels, Drehergasse 1, Danzig) F. A. Bartels Dusseldorf Ship and Engineer Surveyor for Steel Testing duties and Inspection of Forgings, &c., in Germany and Belgium (Address, Franklinstrasse, No. 30, Dusseldorf) * Mr. Meyer is exclusively an Officer of Lloyd's Register. 11 Amburg with the River Elbe, Lubeck, Rostock and Ports in Holstein Ship Surveyor (Office, Steinhöft No.3; Telegrams, Dykes, Steinhöft) * Mr. Dykes and Mr. Macdonald are exclusively Officers of Lloyd's Register. Engineer Surveyor for the Hamburg District)
(Address, Burgermeister Smidstrasse, No. 110; TELEGRAMS, Ferd. Thomsen DANZIG (Address, Drehergasse, 1; TELEGRAMS, Bartels, Drehergasse 1, Danzig) BUSSELDORF Ship and Engineer Surveyor for Steel Testing duties and Inspection of Forgings, &c., in Germany and Belgium (Address, Franklinstrasse, No. 30, Dusseldorf) * Mr. Meyer is exclusively an Officer of Lloyd's Register. HAMBURG with the River Elbe, Lubeck, Rostock and Ports in Holstein Ship Surveyor (Office, Steinhöft No.3; Telegrams, Dykes, Steinhöft) * Mr. Dykes and Mr. Macdonald are exclusively Officers of Lloyd's Register. Engineer Surveyor for the Hamburg District
Dusseldorf Ship and Engineer Surveyor for Steel Testing duties and Inspection of Forgings, &c., in Germany and Belgium (Address, Franklinstrasse, No. 30, Dusseldorf) * Mr. Meyer is exclusively an Officer of Lloyd's Register. 11 Amburg with the River Elbe, Lubeck, Rostock and Ports in Holstein (Office, Steinhöft No.3; Telegrams, Dykes, Steinhöft) * Mr. Dykes and Mr. Macdonald are exclusively Officers of Lloyd's Register. Engineer Surveyor for the Hamburg District
Inspection of Forgings, &c., in Germany and Belgium (Address, Franklinstrasse, No. 30, Dusseldorf) * Mr. Meyer is exclusively an Officer of Lloyd's Register. llamburg with the River Elbe, Lubeck, Rostock and Ports in Holstein Ship Surveyor (Office, Steinhöft No.3; Telegrams, Dykes, Steinhöft) * Mr. Dykes and Mr. Macdonald are exclusively Officers of Lloyd's Register. Engineer Surveyor for the Hamburg District
Ship Surveyor
Engineer Surveyor for the Hamburg District
Telegrams, Ingbert, Hamburg
Assistant Engineer Surveyor C. H. Rieck
Stettin with Swinemiinde Ship and Engineer Surveyor (Office, Bollwerk 1, Commercial Hall, Room No. 12)
6. HOLLAND.
Amsterdam with Nieuwdiep and neighbouring Ports Ship and Engineer Surveyor (Office, Prins Hendrikkade, No. 136; Telegrams, Slebe, Prins Hendrikkade, Amsterdam) *Mr. Slebe is exclusively an Officer of Lloyd's Register.
ROTTERDAM with Dordrecht, Schiedam, and surrounding places, also Zeeland Ship and Engineer Surveyor Ship Surveyor (Address, Westerkade 10, Rotterdam; Telegrams, Lloyd's Register, Rotterdam) * Mr. Van Ollefen and Mr. Leeuwenburg are exclusively Officers of Lloyd's Register.
VEENDAM with Groningen, Zwolle, Harlingen, Emden, and sur- rounding places, including Hanover (Address, Kerklaan, H. 785, Veendam; Telegrams, Hazewinkel, Expert)

FOREIGN AND COLONIAL SURVEYORSHIPS—continuea.

7. BELGIUM.

ANTWERP	including the various Belgian Ports and the Dutch Port Terneuzen	*J. G. G. Rule, Principal Surveyor.
	Ship and Engineer Surveyors	*H. A. Ruck-Keene *H. P. Cornish
	(Surveyors' Office, 28, Kattendyk, Ouest Quai, Antwerp; Telegrams, Register, Antwerp)	(II. I. Cormen
	* These Surveyors are exclusively Officers of Lloyd's R	egister.
	8. FRANCE.	
BORDEAUX	C Ship Surveyor (Address, 16, Rue Esprit des Lois; Telegrams, Albert Vandercruyce)	Albert Vandercruyce
	Engineer Surveyor (Telegrams, Arthur Donzelle)	Arthur Donzelle
DUNKIRK	including Calais Ship and Engineer Surveyor (Office, 7, Rue des Arbres; Telegrams, Morel, Lloyd's)	F. C. Morel
HÂVRE	with a District including Boulogne, Barfleur, and Rouen	4)
	Ship Surveyor (Office, 61, Rove de la Bourse, Hâvre; Telegrams, Cordemoy)	*H. J. de Cordemoy
*Mr. de	Assistant Ship and Engineer Surveyor Cordemoy and Mr. Cartier are exclusively Officers of Lloyd's Register.	*A. Cartier
MARSEILL	ES Ship and Engineer Surveyor (Address, 26, Rue de la République; Telegrams, Vence)	} Jules Vence
NANTES	Ship and Engineer Surveyor (Office, 44, Boulevard St. Aignan; Telegrams, Deprise)	Joseph R. Deprise
	9. SPAIN AND PORTUGAL.	
BARCELON	A Ship and Engineer Surveyor (Office, 85, Balmes; Telegrams, Balmes 85)	G. E. A. Muston
BILBAO	(Address, Calle de la Sierra 14; Telegrams, Lloyd's)	German De Bareno
CADIZ	Ship and Engineer Surveyor (Address, Aduana 8; Telegrams, West)	William West
CARTHAGE	NA Ship and Engineer Surveyor (Address, Calle Palas 5, 2°; Telegrams, Perez; Palas 5, Carthagena)	R. Perez y Ros
Lisbon	Ship and Engineer Surveyor (Address, 8, Rua do Prata 1°; Telegrams, Piston)	Alexander Henderson
OPORTO	Ship and Engineer Surveyor (Office, 55, Rua da Rebobeira; Telegrams, Ennor)	Charles J. Ennor
	10. AZORES.	
ST. MICHA	EL'S (Address, Rua dos Mercadores 46, Ponta Delgada; Telegrams, Josouza, Ponta Delgada)	J. J. de Souza

FOREIGN AND COLONIAL SURVEYORSHIPS—continued.

	11. GIBRALTAR.	
GIBRALTAR	Ship and Engineer Surveyor (Address, H.M. Naval Yard, Gibraltar; Telegrams, Yard)	George A. Haddy
	12. ITALY AND AUSTRIA.	
ANCONA	(Telegrams, Devon)	F. G. Emett
FIUME	with the coast south of Pola, and the Dalmatian Islands Ship and Engineer Surveyor (Telegrams, Schnabl, Ingenieur, Fiume)	Anthony Schnabl
	Assistant Ship Surveyor for Wood Ships	Ignazio Bonetich
GENOA	(Office, Piazza S. Giorgio No. 32, 1a Scala; Telegrams, Schiaffino, Surveyor)	Francesco Schiaffino
	Ship and Engineer Surveyor	*Maurice Ritson
Leghorn	(Telegrams, A. Gori)	Amerigo Gori
NAPLES	with Messina and other ports in Sicily	
	Ship and Engineer Surveyor (Residing at Torre Annunciata, near Naples; Telegrams, Ducoster, Torrannunziata)	Francesco Ducoster
TRIESTE	with Pola and the coast north of Pola)
(0	Ship Surveyor	Elias Florio
(0)	ffice, Via delle Poste Vecchie, Trieste; Telegrams, Elias Florio) Assistant Ship and Engineer Surveyor at Trieste	Roberto Dussich
	13. MALTA.	
MALTA	Ship and Engineer Surveyor (Office, 21, Strada Zaccaria, Valetta; Telegrams, Register)	C. H. Wright
	14. GREECE, TURKEY, TURKEY IN ASIA, AND R	OUMANIA.
Constantin	OPLE Ship Surveyor (Telegrams, Woods) Engineer Surveyor (Telegrams, Warren)	Admiral Woods Pasha G. R. Warren
GALATZ ANI	Braila with a district extending as far as the mouth of the Danube and including Sulina (residing at Braila; Telegrams, Archbold)	T. H. Archbold
PIRÆUS	Ship and Engineer Surveyor (Telegrams, Stuart)	James Stuart
	15. BRITISH NORTH AMERICA.	
HALIFAX, N	.S (Telegrams, Huntcom)	David Hunter
MONTREAL	(Address, Port Warden's Office; Telegrams, Portwarden)	Archibald Reid
PRINCE EDV	NARD ISLAND (residing at Charlotte Town; Telegrams, Register, Charlotte Town)	H. P. Welsh
QUEBEC	and the River St. Lawrence (Telegrams, Brunelle, Quebec)	P. D. Brunelle
VANCOUVER	Island Ship and Engineer Surveyor (Office, 12, Wharf Street, Victoria, B.C.; Telegrams, Cartmel, Victoria, B.C.)	Daniel Cartmel
	16. NEWFOUNDLAND.	
ST John's	(Address, 12, Gower Street; Telegrams, Surveyor) * Mr. Wheatley is exclusively an Officer of Lloyd's Regi	*George Wheatley ister.

FOREIGN AND COLONIAL SURVEYORSHIPS—continued.

17. UNITED STATES.

New York	Principal Surveyor for the United States, and Surveyor for the Port and District of New York (Office, Kemble Buildings, Whitehall Street, New York) Ship and Engineer Surveyor (Telegrams for the Surveyors, Nymdible) * Mr. Congdon and Mr. Mancor are exclusively Officers of Llog	*Thomas Congdon *J. H. Mancor yd's Register.
BALTIMORE and	the Ports in Chesapeake Bay Ship Surveyor (Office, 11, South Gay Street; Telegrams, Hoyle) Engineer Surveyor (Address, 530, Light Street,	Edward H. Sanford
	Baltimore; Telegrams, Higgins)	H. C. Higgins
Boston	Ship and Engineer Surveyor (Telegrams, Olshaw)	Oliver L. Shaw
GALVESTON, TEX	AS, Ship and Engineer Surveyor (Address, 2118, Strand)	T. J. Anderson
NEW ORLEANS		
PENSACOLA	(Telegrams, Cosulich)	S. A. Cosulich
PHILADELPHIA (O)	Ship and Engineer Surveyor fice, 206, Walnut Place, Philadelphia; Telegrams, Haug)	John Haug
PITTSBURG, PA.	For Steel Testing duties (Address, 5818, Fifth Avenue, Pittsburg, Pa.)	} *G. O. Herbert.
	* Mr. Herbert is exclusively an Officer of Lloyd's Reg	ister.
PORTLAND, OREG	ON (Address, Rooms 13 & 14, Sherlock Buildings, Third and Oak Streets; Telegrams, Pope)	George Pope
San Francisco	(Address, 304, California Street; Telegrams, Freeboard, SanFrisco)	John Metcalfe
	10 COUNT AMEDICA	
Buenos Ayres	18. SOUTH AMERICA.	1
AND ROSARIO	Ship and Engineer Surveyor (Office, Reconquista 349, Buenos Ayres; Telegrams, Perito) * Mr. Gray is exclusively an Officer of Lloyd's Regis	*Thomas L. Gray
DEMERARA	(residing at Georgetown; Telegrams, Heliostat)	Alexander Duncan
MONTE VIDEO	(Address, care of Messrs. Carlisle, Smith & Co.,	1
AUDITE VIDEO	29, Calle Rincon; Telegrams, Crocker)	F. Crocker
PARA	Ship and Engineer Surveyor (Address, 51, Boulevard da Republica; Telegrams, Greaves, Para)	} Thomas Greaves
RIO DE JANEIRO	Ship and Engineer Surveyor	Robert Vance
VALPARAISO (Add	Ship and Engineer Surveyor	A. F. Smith
	19. NORTH AFRICA.	
ALGIERS, ORAN,	AND CONSTANTINE	

LAS PALMAS, GRAND CANARY ... Ship and Engineer Surveyor (Telegrams, Latorre, Las Palmas) Manue

Manuel Hernandez EGYPT AND RED SEA PORTS. Ship and Engineer Surveyor ... ADEN W. H. Still (Address, Hudjuff, Aden; TELEGRAMS, Still, Aden) Ship and Engineer Surveyor ... (TELEGRAMS, SUEZ 22. SOUTH AFRICA. (Address, Dock Office; Telegrams, Almutium) W. Stephen CAPE TOWN PORT ELIZABETH with East London (Address, Market Square, Port William Gowan Elizabeth; Telegrams, Gowan) PORT NATAL ... (TELEGRAMS, Airth) Alexander Airth MAURITIUS. (residing at Port Louis; Telegrams, McDonald, MAURITIUS M. S. McDonald INDIA, BURMAH, AND STRAITS SETTLEMENTS. G. B. Brown AKYAB (Telegrams, Lloyd's Surveyor) Ship and Engineer Surveyor (Office, 15, Bank Street, BOMBAY A. L. Whittell Fort, Bombay; Telegrams, Surveyor) (Office, 2, Hare Street, CALCUTTA Ship and Engineer Surveyor *T. W. Fish TELEGRAMS, Surveyor) * Mr. Fish is exclusively an Officer of Lloyd's Register. (Telegrams, Donnan) COLOMBO J. Donnan Ship and Engineer Surveyor (Address, Persian Gulf KURRACHEE J. Hughes Telegraphs, Manora, Kurrachee; Telegrams, Hughes) (Telegrams, Bradbery) E. Bradbery PENANG Ship Surveyor ... Engineer Surveyor ... (TELEGRAMS, Dick) J. N. Dick RANGOON ...(Telegrams, Winter) R. R. Winter *F. W. Webb Ship and Engineer Surveyor (Office, 7E, Battery Road) SINGAPORE *Mr. Webb is exclusively an Officer of Lloyd's Register. WEST INDIA ISLANDS. (Telegrams, Fox, Barbados) H. L. Fox BARBADOS

	26. EAST INDIAN ARCHIPELAGO.	
BATAVIA	(Telegrams, Taalingen, Batavia)	H. van Taalingen
CHERIBON, JAVA	(Telegrams, Campbell)	C. Campbell
Manila	and Ports in the Philippine Islands (Address, Callejon de San Gabriel, No. 4; Telegrams, Dearnshaw, Manila) Ship and Engineer Surveyor	Daniel Earnshaw

SOURABAYA

... (Telegrams, Schipper, Sourabaya)

B. J. Schipper

FOREIGN AND COLONIAL SURVEYORSHIPS—continued.

27. CHINA AND JAPAN.

Hong Kong	Ship and Engineer Surveyor (Office, No. 13, Beaconsfield Arcade; Telegrams, Marine) * Mr. Mumford is exclusively an Officer of Lloyd's Register	*Newman Mumford
Kobé, Hiogo	Ship and Engineer Surveyor (Telegrams, Ellerton)	James Ellerton
NAGASAKI	Ship and Engineer Surveyor (Address, 42c, Sagarimatsu) *Mr. Jones is exclusively an Officer of Lloyd's Register.	*A. L. Jones
SHANGHAI	Ship and Engineer Surveyor (Telegrams, Sonne)	H. Sonne
У оконама	Ship and Engineer Surveyor	*A. S. Williamson.

28. AUSTRALIA, TASMANIA, AND NEW ZEALAND.

ADELAIDE, S.A (Office, Lipson Street, Port Adelaide)	J. H. Gibbon
AUCKLAND, N.Z (TELEGRAMS, Replento)	M. T. Clayton
Brisbane, Queensland (Address, Parbury's Buildings, Eagle Street; Telegrams, Surveyor, Brisbane)	R. S. Taylor
CHRISTCHURCH AND LYTTELTON, N.Z (residing at Lyttelton)	Stewart Willis
DUNEDIN, N.Z (TELEGRAMS, Gunwale)	W. Thomson
FREMANTLE, W.A. (Address, P.O. Box 10; Telegrams, Webster)	William Webster
HOBART, TASMANIA (TELEGRAMS, Macmillan, Hobart)	Donald Macmillan
Melbourne, Victoria (Address, New Zealand Chambers, 483, Collins Street; Telegrams, Reports, Me'bourne)	Alexander McCowan
Napier, N.Z	A. Davidson
Newcastle, N.S.W (Telegrams, Brooks)	Thomas Brooks
Sydney, N.S.W. Ship and Engineer Surveyor (Telegrams, Miramar)	*R. Pollock
* Mr. Pollock is exclusively an Officer of Lloyd's Reg	ister.
Wellington, N.Z	William Bendall

^{2,} White Lion Court, Cornhill, London. June, 1900.

LIST OF SURVEYORS OF LLOYD'S REGISTER (ALPHABETICALLY ARRANGED.)

THE SURVEYORS AT THE PORTS MARKED * ARE EXCLUSIVELY THE OFFICERS OF THE SOCIETY, AND ARE NOT PERMITTED TO ENGAGE IN ANY OTHER BUSINESS OR EMPLOYMENT WHATSOEVER.

	HARRY J. CORNISH, Esq., Chief Ship Surveyor of Lloyd's Register	George P. Cooper, Principal Surveyor for London District. Chas. H. Jordan
	George Stanbury Assistants to Chief Ship Surveyor S. J. P. Thearle	C. Buchanan Geo. R. Mares E. J. Tierney James H. Truscott
	JAMES T. MILTON, Esq., Chief Engineer Surveyor of Lloyd's Register	T. Shilston J. D. Mares J. Bruhn
*London (Telegrams, Committee)	J. E. Stoddart, Assistant to Chief Engineer Surveyor	S. O. Kendall J. W. Isherwood G. L. Brown R. B. Watt B. J. Ives
	Engineer Surveyors and Ship and Engineer Surveyors	D. Ritchie T. R. Blackie E. M. Salmon R. Balfour F. L. Sturgeon C. M. B. Dyer C. Martell P. I. Adie
	Draughtsman Examiner of Masts, Spars and Rigging	J. M. Buchanan David S. Hunter H. J. West
Aalborg (Cop hagen Distr		A. H. Jepmond
*ABERDEEN ADELAIDE, S.	Ship and Engineer Surveyor (Office, 29, Regent Quay)	J. G. Hunter J. H. Gibbon
ADEN	Ship and Engineer Surveyor (Address, Hudjuff, Aden; Telegrams, Still, Aden)	W. H. Still
Акуав	(Telegrams, Lloyd's Surveyor)	G. B. Brown
	N, AND CONSTANTINE	
*AMSTERDAM	Ship and Engineer Surveyor (Office, Prins Hendrikkade, No. 136; Telegrams, Slebe, Prins Hendrikkade, Amsterdam)	J. B. Slebe
ANCONA	(Telegrams, Devon)	F. G. Emett
*ANTWERP	(Surveyors' Office, 28, Kattendyk, Ouest Quai; Telegrams, Register)	J. G. G. Rule, Principal Surveyor.
	Ship and Engineer Surveyors	H. A. Ruck-Keene H. P. Cornish

10		
LIST OF	SURVEYORSHIPS (ALPHABETICALLY ARRANGED)—con	tinued.
AUCKLAND, N.Z	(Telegrams, Replento)	M. T. Clayton
Azores	(See St. Michael's)	V
BALTIMORE and	the ports in Chesapeake Bay Ship Surveyor (Office, 11, South Gay Street; Telegrams, Hoyle)	Edward H. Sanford
	Engineer Surveyor (Address, 530, Light Street, Baltimore; Telegrams, Higgins)	H. C. Higgins
*Bangor	(Address, Kildare House, Holyhead Road, Bangor)	Thomas Riley
BARBADOS	(Telegrams, Fox, Barbados)	H. L. Fox
BARCELONA	Ship and Engineer Surveyor (Office, 85 Balmes; Telegrams, Balmes 85, Barcelona)	G. E. A. Muston
*Barrow	Ship Surveyor	W. L. Sharpe
	Ship and Engineer Surveyor (Office, Ramsden Square)	J. Easthope
*BARRY	Ship and Engineer Surveyors (Office, Dock Chambers, Barry Dock)	Wm. J. Darling H. E. Tilston
	Ship Surveyor	T. G. Baker
BATAVIA	··· ·· ·· (Telegrams, Taalingen)	H. van Taalingen
BATOUM		
*BELFAST	Ship Surveyors (Office, 53, Waring Street)	James Turpin D. McAuslan
	Ship and Engineer Surveyor	R. J. Beveridge
BERGEN	Ship and Engineer Surveyor (Telegrams, Surveyor, Bergen)	S. A. Eide
*BIDEFORD	··· ·· ·· (Residing at Appledore)	G. Westcott
BILBAO	(Address, Calle de la Sierra 14; Telegrams, Lloyd's)	German De Bareno
Вомвач	Ship and Engineer Surveyor (Office, 15, Bank Street, Fort, Bombay; Telegrams, Surveyor)	A. L. Whittell
BORDEAUX	Ship Surveyor (Address, 16, Rue Esprit des Lois; Telegrams, Albert Vandercruyce)	Albert Vandercruyce
	Engineer Surveyor (Telegrams, Arthur Donzelle)	Arthur Donzelle
Boston, Mass.	Ship and Engineer Surveyor (Telegrams, Olshaw)	Oliver L. Shaw
	ATZ (residing at Braila; Telegrams, Archbold)	T. H. Archbold
BREMERHAVEN	Ship and Engineer Surveyor for Weser District (Office, Burgermeister Smidstrasse, No. 110; Telegrams, Ferd. Thomsen)	F. H., T. Thomsen
Brisbane, Queen	NSLAND (Address, Parbury's Buildings, Eagle Street; Telegrams, Surveyor, Brisbane)	R. S. Taylor
*BRISTOL	Ship and Engineer Surveyor (Office, 53, Queen's Square)	C. Cooper

- TOWN OF CITE	VEYORSHIPS (ALPHABETICA	ALLY ARRANGED)—continu	ued.
	Chan M	and HAMMINEEL DOLLOGO	Thomas L. Gray
	RD ROSARIO Ship a ce,Reconquista 349, Buenos Ayre Chip and Engineer Surveyor ((Address, Aduana, 8; TELEGRAMS, West)	William West
	Ship and Engineer Surveyor (Office, 2, Hare Street; (YELEGRAMS, Surveyor)	T. W. Fish
CAPE TOWN	(Address, Dock Office; Tr	ELEGRAMS, Almutium)	W. Stephen Andrew K. Hamilton, Principal Surveyor.
*CARDIFF	Ship Surveyors Offices, Merchants' Exchange Engineer Surveyor and Ship a		J. W. Scullard D. Nicholas C. M. Smith J. F. Walliker W. Sibun J. Pollock A. Boyd
CARTHAGENA	Ship and Engineer Surveyor	(Address, Calle ez, Palas 5, Carthagena)	R. Perez y Ros
*CHANNEL ISLANI	os (Office, 15, Mulcaster Str.	eet, St. Heller's, Jersey)	J. F. Picot
CHERIBON, JAVA	((Telegrams, Campbell)	C. Campbell Stewart Willis
CHRISTCHURCH, N	.Z	(residing at Lyttelton)	O. C. Sanne
CHRISTIANIA		(Address, 36, Skipper s, Surveyor, Christiania)	J. Donnan
Colombo		(Telegrams, Donnan) (Telegrams, Woods)	Admiral Woods Pasha
CONSTANTINOPLE	Engineer Surveyor	(Telegrams, Warren)	G. R. Warren
COPENHAGEN	Ship and Engineer Surveyor (Office, 22, Amaliegade, Coper	nhagen, K.; Telegrams, Krebsof)	O. F. Krebs
CRONSTADT			
DANZIG	Telegrams, Bartel	(Address, Drehergasse 1; s, Drehergasse 1, Danzig)	F. A. Bartels
DEMERARA	(residing at Georgetown	; TELEGRAMS, Heliostat)	Alexander Duncan
*Dublin	Ship and Engineer Surveyor (Address, 5	1, Dodo Notice	J. Macwilliam
*Dundee	Ship and Engineer Surveyor (Office, Maritime Bu	uildings, East Dock Street)	W. Morrison R. Howie
Dunedin, N.Z.	Ship Surveyor	(Telegrams, Gunwale)	
DUNKIRK	including CALAIS	(Office, 7, Rue des Arbres; Morel, Lloyd's, Dunkirk)	F. C. Morel

LIST OF SURVEYORSHIPS (ALPHABETICALLY ARRANGED)—contin	nued
*Dusseldorf Ship and Engineer Surveyor for Steel Testing duties and Inspection of Forgings, &c., in Germany and Belgium (Address, Franklinstrasse No. 30, Dusseldorf)	J. Meyer
*FALMOUTH Ship Surveyor (Surveyors' Office, Pendennis House, Lansdowne Road)	T. H. Sandry
Ship and Engineer Surveyor	R. H. Cooper
FIUME Ship and Engineer Surveyor (Telegrams, Schnabl, Ingenieur, Fiume)	Anthony Schnabl
Assistant Ship Surveyor for Wood Ships FREMANTLE, W.A (Address, P.O. Box 10; Telegrams, Webster) GALATZ and BRAILA (residing at Braila; Telegrams, Archbold) GALVESTON, TEXAS Ship and Engineer Surveyor (Address, 2118, Strand) *GENOA (Office, Piazza S. Giorgio No. 32, 1a Scala; Telegrams, Schiaffino, Surveyor)	Ignazio Bonetich William Webster T. H. Archbold T. J. Anderson †Francesco Schiaffino
Ship and Engineer Surveyor	Maurice Ritson
† Mr. Schiaffino is not exclusively the servant of the Soci GIBRALTAR Ship and Engineer Surveyor (Address, H.M. Naval Yard; TELEGRAMS, Yard)	George A. Haddy
*Glasgow Ship Surveyors (Office, 342, Argyle Street)	Thomas J. Dodd, Principal Surveyor. Thomas S. Warren J. L. Sinnette T. J. House Henry Hand A. B. Wilson F. R. Noton R. Wright J. McIlvenna G. F. Robson W. H. Watson R. S. Rowntree G. D. Aitken A. B. R. Harris J. W. Grier
Principal Engineer Surveyor for Glasgov District	James Mollison
	W. R. Austin A. McKeand G. Murdoch J. W. Dimmock
Engineer Surveyors and Ship and Engineer Surveyors	J. Kerr H. G. Smith J. B. A. Common W. G. Minchin B. S. Murphy G. D. Ritchie
Inspectors of Forgings for the Clyde District	W. Hamilton F. Cook
*GOTHENBURG Ship and Engineer Surveyor (Office, 6, Lazarettsgatan)	V. C. Bulow

TIST OF ST	JRVEYORSHIPS (ALPHABETICALLY TARRANGED)—conti	mued and the state of the state of
	CORT GLASGOW	W. Johnstone, Principal Surveyor. J. French J. Craig Andrew C. Heron R. Elliott
*GRIMSBY AND BO	OSTON Ship and Engineer Surveyors (Office, Bank Chambers, 2, Freeman Street, Great Grimsby)	B. G. Oxford A. C. Heron
HALIFAX, N.S.	(Telegrams, Huntcom)	David Hunter
*Hamburg	Ship Surveyors (Office, Steinhöft, No. 3; Telegrams, Dykes, Steinhöft) Engineer Surveyor (Office, Admiralitatstrasse, 52; Telegrams, Ingbert, Hamburg)	Geo. Dykes John Macdonald †M. Berendt
	Assistant Engineer Surveyor	
*Hartlepool, an	D WEST HARTLEPOOL, with Whitby and Scarborough Ship Surveyors (Office, Dock Office Buildings, Victoria Terrace, West Hartlepool)	Charles Fowling, Principal Surveyor. E. C. Champness R. Bennett R. Hirst
	Engineer Surveyor, and Ship and Engineer Surveyors	W. J. Smith P. McGregor T. L. Thornton
*HAVRE	Ship Surveyor (Office, 61, Rue de la Bourse, Hâvre; Telegrams, Cordemoy)	H. J. de Cordemoy
II-r grangpong	Assistant Ship and Engineer Surveyor	A. Cartier
HELSINGFORS	Ship and Engineer Surveyor (Address, 16, Alexandersgatan)	Hugo Lindfors
HOBART, TASMANI		Donald Macmillan
*Hong Kong	Ship and Engineer Surveyor (Office, No.13, Beaconsfield Arcade; Telegrams, Marine)	Newman Mumford
*HULL	Ship Surveyor (Office, Bank Chambers, Land of Green Ginger, Hull)	J. Thomson
	Ship and Engineer Surveyors	James Innes T. Robertson
IPSWICH (See LON	DON).	2. 10000105011
Koвé, Hiogo	Ship and Engineer Surveyor (Telegrams, Ellerton)	James Ellerton
KURRACHEE	Ship and Engineer Surveyor (Address, Persian Gulf Telegraphs, Manora, Kurrachee; Telegrams, Hughes)	J. Hughes
LAS PALMAS, GRAND CANARY	Ship and Engineer Surveyor (Telegrams, Latorre, Las Palmas)	Manuel Hernandez
LEGHORN	(Telegrams, A. Gori, Leghorn)	Amerigo Gori
*LEITH	Ship Surveyor (Office, 56, Constitution Street)	William Paulsen
	Ship and Engineer Surveyors	H. Clarke T. Field
Lisbon	Ship and Engineer Surveyor (Address, 8, Rua do Prata 1°; Telegrams Piston)	Alex. Henderson

*LIVERPOOL	Ship Surveyors (Office, 12, Orie Chambers, Water Street; Telegrams, Register)	R. Williamson, Principal Surveyor. C. E. Burney J. Bradley R. T. Johnson S. A. G. Nash J. Petree
,	Engineer Surveyors, and Ship and Engineer Surveyors	Peter McGregor G. A. Milner J. Dykes C. I. Davidson
LYFTELTON, N.Z.		Stewart Willis
MALTA	Ship and Engineer Surveyor (Office, 21, Strada Zaccaria, Valetta; Telegrams, Register)	C. H. Wright
*MANCHESTER	(Office, 552, Chester Road, Old Trafford, Manchester) Ship and Engineer Surveyors	F. W. Pitt G. C. Vaux
	and Engineer Surveyor ess, Callejon de San Gabriel 4; Telegrams, Dearnshaw) } Daniel Earnshaw
MARSEILLES	Ship and Engineer Surveyor (Address, 26, Rue de la République ; Telegrams, Vence)	} Jules Vence
Mauritius (res	riding at Port Louis; Telegrams, McDonald, Mauritius)	M. S. McDonald
Melbourne. Victoria	Ship and Engineer Surveyor (Address, New Zealand Chambers, 483, Collins Street, Melbourne; Telegrams, Reports)	Alexander McCowan
Messina .	and other ports in Sicily (See Naples).	
*Middlesbrough	with Stockton Ship Surveyors (Office, Royal Exchange, Middlesborough)	Jesse Williams, Principal Surveyor. W. H. Cooper O. Narbeth H. C. Farrar N. E. McCelland (John Sanderson
	Ship and Engineer Surveyors	R. Fowell J. Carnaghan R. D. Shilston
MILFORD HAVEN	Ship and Engineer Surveyor	James Denholm
MONTE VIDEO	(Address, care of Messrs. Carlisle, Smith & Co., 29, Calle Rincon; Telegrams, Crocker)	F. Crocker
MONTREAL (Address, Port Warden's Office; Telegrams, Portwarden)	Archibald Reid
*NAGASAKI	Ship and Engineer Surveyor (Address, 42c, Sagarimatsu)	A. L. Jones
NANTES ((Ship and Engineer Surveyor Office, 41, Boulevard St. Aignan; Telegrams, Deprise)	Joseph R. Deprise
NAPIER, N.Z.	· · · · · · · · · · · · · · · · · · ·	A. Davidson


LIST OF SU	URVEYORSHIPS (ALPHABETICALLY ARRANGED) -co	intinued.
NAPLES Ship	and Engineer Surveyor (Residing at Torre Annunciata, near Naples; Telegrams, Ducoster, Torrannunziata)	} Francesco Ducoster
NEW ORLEANS		
*New York	Principal Surveyor for the United States (Office, Kemble Buildings, Whitehall Street)	Thomas Congdon
	Ship and Engineer Surveyor	J. H. Mancor
NEWCASTLE, N.S.W	7. Ship Surveyor (Telegrams, Brooks)	Thomas Brooks Thomas Phillips, Principal Surveyor.
*Newcastle-on-T	YNE Ship Surveyors (Office, 3, St. Nicholas' Buildings)	James McNeil Thomas H. Cooke Charles Skentelbery W. L. Gilmour E. J. Milton J. Allan A. R. Sneddon T. Shaw W. S. P. Collings
	Engineer Surveyors, and Ship and Engineer Surveyors Inspector of Forgings	R. Langlands J. H. Heck G. L. Hindmarsh G. A. Hake R. Haig J. C. Turpin T. N. Wawn G. A. D. Toyne A. E. Farminer J. H. W. Marsden J. C. Craig
*Newfoundland	(Address, 12, Gower St., St. John's; Telegrams, Surveyor)	George Wheatley
*Newport, Mon.	with Chepstow (Office, Bank Chambers, Newport, Mon.) Ship and Engineer Surveyor Ship Surveyor	H. H. Ashton A. Munro
Nordby, Fanö	Assistant Shin Surveyor	L. J. Hansen
(Copenhagen District ODESSA	Ship and Engineer Surveyor (Telegrams, Crookston) (Acting also as Surveyor for Sebastopol)	J. G. Crookston
OPORTO	Ship and Engineer Surveyor (Office, 55, Rua da Rebobeira; Telegrams, Ennor)	Charles J. Ennor
ORKNEYS	(residing at Stromness)	Geo. Gunn Baillie
PARA	Ship and Engineer Surveyor (Address, 51, Boulevard da Republica; Telegrams, Greaves, Para)	
PENANG	Ship Surveyor (Telegrams, Bradbery) Engineer Surveyor (Telegrams, Dick)	E. Bradbery J. N. Dick
PENSACOLA	(TELEGRAMS, Cosulich)	

PHILADELPHIA	Ship and Engineer Surveyor (Office, 206, Walnut Place, Philadelphia; Telegrams, Haug)	John Haug
PIRÆUS	Ship and Engineer Surveyor (Telegrams, Stuart)	James Stuart
*PITTSBURG, PA.	For Steel Testing duties (Address, 5818, Fifth Avenue, Pittsburg, Pa.)	G. O. Herbert
*PLYMOUTH	Ship and Engineer Surveyor (Office, 13, Exchange)	George Duncan
PORT ELIZABETH EAST LONDO		William Gowan
PORT NATAL	(Telegrams, Airth)	Alexander Airth
PORTLAND, OREGO	N (Address, Rooms 13 & 14, Sherlock Buildings, Third and Oak Streets; Telegrams, Pope)	George Pope
*PORTMADOC		John W. James
PRINCE EDWARD ISLAND	{ (residing at Charlotte Town; Telegrams, Register, Charlotte Town)	H. P. Welsh
QUEBEC	(Telegrams, Brunelle, Quebec)	P. D. Brunelle
*QUEENSTOWN	(Address, 24, The Beach)	J W. Attridge
Rangoon	(Telegrams, Winter)	R. R. Winter
RIGA	Ship and Engineer Surveyor (Address, Pychlau's Sagemuhle, Oscarstrasse, No. 7; Telegrams, Buchholz)	Eduard Buchholz
RIO DE JANEIRO	Ship & Engineer Surveyor	Robert Vance
ROSTOCK (See HA	MBURG).	
*ROTTERDAM	(Office, Westerkade 10, Rotterdam; Telegrams, Lloyd's Register, Rotterdam)	W. F. D. Van Ollefen R. Leeuwenburg
*St. John's, N.F	.L. (See Newfoundland).	
St. Michael's, Az	Cores (Address, Rua dos Mercadores 46, Ponta Delgada; Telegrams, Josouza, Ponta Delgada)	J. J. de Souza
St. Petersburg		
San Francisco	(Address, 304, California Street; Telegrams, Freeboard, San Frisco)	} John Metcalfe
SEBASTOPOL	(See Odessa).	
SHANGHAI	Ship and Engineer Surveyor (Telegrams, Sonne)	H. Sonne
*SHEFFIELD	Ship and Engineer Surveyors (Office, Buckingham Chambers, St. James Street)	R. F. Morton L. G. Shallcross

2202 02 10		
*SINGAPORE	Ship and Engineer Surveyor (Office, 7E, Battery Road)	F. W. Webb
Sourabaÿa	(Telegrams, Schipper)	B. J. Schipper
*Southampton	Ship and Engineer Surveyor (Office, 3, Oriental Place) Ship Surveyor	R. W. Coomber C. Edwards
STETTIN	with Swinemünde Ship and Engineer Surveyor (Office, Bollwerk 1, Commercial Hall, Room No. 12)	Emil Herzberg
STOCKHOLM	Ship and Engineer Surveyor (Address, Skeppsmatningskontoret, 46, Skeppsbron; Telegrams, Lloyd's Register)	Albert Isakson –
*Sunderland	Ship and Engineer Surveyor (Telegrams,) Ship Surveyors (Office, 56, John Street)	John Lawrence, Principal Surveyor George Harrison A. Campbell-Holms T. S. Leathard T. S. Shute G. M. Shaw
*Swansea	Engineer Surveyors and Ship and Engineer Surveyors Inspector of Forgings Snip and Engineer Surveyor (Office, 1, Gloster Place)	Patrick Salmon J. T. Findlay F. W. Fillmore Hugh Cameron J. Barclay
*SYDNEY, N.S.W	. Ship and Engineer Surveyor (Telegrams, Miramar)	R. Pollock
TRIESTE	Ship Surveyors (Office, Via delle Poste Vecchie, Trieste; Telegrams, Elias Florio)	Elias Florio
	Assistant Ship and Engineer Surveyor at Trieste	Roberto Dussich
VALPARAISO	Ship and Engineer Surveyor (Address, Casilla, 934; Telegrams, Smith, Pacific, Valparaiso)	A. F. Smith
Vancouver Islan	ND Ship and Engineer Surveyor (Office, 12, Wharf Street, Victoria, B.C.; Telegrams, Cartmel, Victoria, B.C.)	Daniel Cartmel
VEENDAM	(Address, Kerklaan H., 785, Veendam; Telegrams, Hazewinkel, Expert)	H. P. Hazewinkel
WATERFORD	Ship and Engineer Surveyor	Andrew Horn
Wellington, N.		William Bendall
WEXFORD		R. J. Sparrow
*WHITEHAVEN (
* Токонама	Ship and Engineer Surveyor	A. S. Williamson

^{2,} WHITE LION COURT, CORNHILL, LONDON.

June, 1900.

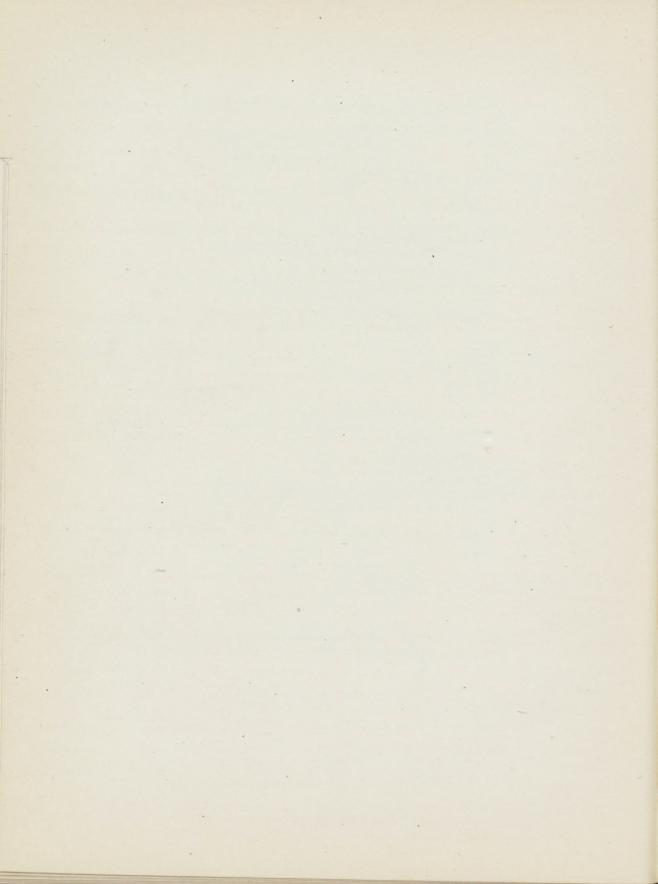

LLOYD'S REGISTER

OF

BRITISH AND FOREIGN SHIPPING.

RULES AND REGULATIONS.

Section 1. The operations of the Societies of the two Register Books of Shipping formerly printed for the use of Merchants, Ship Owners, and Underwriters, having ceased in the year 1834, this Society was then established for the purpose of obtaining a faithful and accurate Classification of the Mercantile Shipping of the United Kingdom, and of the Foreign Vessels trading thereto, and for the government of which the following Rules and Regulations have been from time to time adopted.

Section 2. A Register Book to be printed annually for the use of Subscribers, containing the names of the Ships with other useful information, and the Character assigned, where the vessels are classed by the Society; also the names, &c., of all Ships of 100 tons and upwards unclassed by this Society.

Section 3. Each person subscribing the sum of Three Guineas per annum (or such other sum as the General Committee may fix) to be considered a Member of the Society, and entitled for his own use to one copy of the Register Book.

Section 4. The subscription of Marine Insurance Companies, Public Companies or Public Establishments to be Six Guineas per annum, for a single copy of the Register Book and £3 3s. per annum for every additional copy supplied, unless the copies be periodically posted with type with additions and corrections throughout the year, in which case the subscription for each copy supplied will be Ten guineas per annum.

Section 5. In the case of other Subscribers the subscription to be £3 3s. per annum for each copy, unless periodically posted with type with additions and corrections throughout the year, in which case the subscription will be £5 5s. per annum for each copy supplied.

Section 6. For the convenience of Subscribers not resident in London, or whose Register Books are not posted, a Supplement, containing the additions to, and corrections made in, the Register Book, to be printed fortnightly, in such convenient form as to admit of its transmission by Post, so that such parties may be furnished, from time to time, with the latest and most complete information.

Section 7. The superintendence of the affairs of the Society to be under the direction of a Committee of Merchants, Shipowners, and Underwriters: twenty-four elected in London and thirty-two at the principal Outports, and in addition, the Chairman, or, in his absence, the Deputy-Chairman of the Corporation of Lloyd's, and the Chairman, or, in his absence, the Deputy-Chairman of the General Shipowners' Society, for the time being, to be, ex-officio, Members of the Committee, but any member (except an ex-officio member) who fails to attend any meetings of the Committee for a period of six continuous months, without leave of absence, shall cease to be a member, and his place shall be filled up in the usual way.

Note.—Official intimation to be given in June of each year whether the Chairman or Deputy-Chairman of the Corporation of Lloyd's, or the General Shipowners' Society, respectively, are to be the ex-officio members for the ensuing twelve months.

Section 8. The General Committee reserve the right of varying or withdrawing the representation of Outports, also the representation of Shipbuilders, Engineers, and Steel Makers on the Technical Sub-Committee hereinafter mentioned, as well as the mode of election of Members.

Section 9. 1. Six of the Members elected in London, namely, two of each of the constituent parts of the Committee, to go out annually by rotation, but to be eligible to be re-elected. The vacancies so arising to be filled up by the election of two Underwriters and one Merchant by the Committee of Lloyd's, and two Shipowners and one Merchant by the Committee of the General Shipowners' Society.

2. Of the Members elected at the Outports twenty-eight are to retire at the end of every four years, and four of the Members elected at Liverpool are to retire annually. The retiring Members are eligible for re-election.

Section 10. The Committee to appoint from their own body, annually, a Chairman and Deputy-Chairman, and also a Chairman for a Sub-Committee of Classification.

Section 11. The Committee to appoint a Sub-Committee of Classification, to be so regulated that each Member of the General Committee may, in rotation, take his turn of duty therein throughout the year.

Section 12. The Secretary, Clerks, and Servants of the Society, and the Surveyors, to be appointed by and be under the direction of the General Committee.

Section 13. Special meetings to be convened by order of the Chairman, or Deputy-Chairman, or on the requisition of any three Members.

Section 14. All elections and appointments to be made by ballot, excepting when in the election of Chairman, Deputy-Chairman, or Chairman of Classification, only one person is nominated for each office.

Section 15. No Member of the Committee to be permitted to be present on the decision of the classification of any ship of which he is the owner, or wherein he is directly or indirectly interested.

Section 16. 1. The Committee to be empowered to make such Bye-laws for their own government and proceedings as they may deem requisite, not being inconsistent with the original Rules and Regulations under which the Society was established; but no new Rule or Bye-law to be introduced, or any Rule or Bye-law altered, without special notice being given for that purpose at the Meeting of the Committee next preceding that at which such Motion is intended to be made; such notice to be inserted in the summons convening the meeting.

2. No new Rule, or alteration in any existing Rule, materially affecting the classification of Ships, to take effect until the expiration of six months from the time it shall have been determined upon.

Section 17. Twelve representatives of Shipbuilders and Engineers, and two representatives of Steel Makers shall join the Sub-Committee for Surveyors to form a Technical Sub-Committee, on all occasions when it is proposed to make alterations in the existing rules, or to frame new rules, for the construction of ships or machinery.

The twelve representatives of Shipbuilders and Engineers to be elected by the following bodies, viz. :

(a) The Institution of Naval Architects, London;

(b) The Institution of Shipbuilders and Engineers of the North-East Coast of England, Newcastle-on-Tyne; and

(c) The Institution of Engineers and Shipbuilders in Scotland, Glasgow,

two shipbuilders and two engineers being elected by each body.

The two representatives of Steel Makers to be elected by the Iron and Steel Institute, of whom one is to represent England and Wales, and the other Scotland.

The election in each case to be for a term of four years.

Section 18. All Reports of survey to be made in writing by the Surveyors according to the form prescribed, and submitted for the consideration of the General Committee, or of the Sub-Committees of Classification; but the character assigned by the latter to be subject to confirmation by the General Committee.

Section 19. 1. The reports of the Surveyors, and all documents and proceedings relating to the classification of ships are to be carefully preserved and to be open to the inspection of the Owners, but no other person or persons are to have access to such documents except with the written consent of the Owners and under the direction of the Chairman or Deputy-Chairman.

2. Copies of the original reports (if the ships be already classed, but not otherwise), so far as relates to the dimensions, scantlings, fastenings, and materials, in cases where the correctness of the reports in these particulars is certified by the builders, are granted on application.

Section 20. Foreign ships, and ships built in the British possessions abroad where there is not a Surveyor (see also Section 52 of the Rules for Wood Vessels), to be surveyed on their arrival at a port to which a Surveyor has been appointed; but a due regard is to be had to the circumstance of such vessels having been exempted from supervision while building, and the Character to be assigned to them is to be regulated according to their intrinsic quality and from the best information the Committee can obtain.

Section 21. In every case in which the Character assigned to a ship may be proposed, on survey, to be reduced, notice is to be given in writing to the Owner, Master, or Agent, with an intimation that if the reduction be objected to, the Committee will be ready to direct a special survey, on the Owner, Master, or Agent agreeing to pay the expenses attending the same, provided on the said survey there shall appear sufficient ground for the proposed reduction.

Section 22. 1. When the Surveyors consider repairs to be requisite, they are respectfully to communicate the same in writing to the Owner, Master, or Agent, and if such repairs be not entered upon within a reasonable time, a corresponding report is to be made, as soon as possible, to the Committee for their decision thereon.

2. All repairs of Ships or Machinery required at Ports where there is a Surveyor to this Society, in order to their obtaining a Character in the Register Book, or to their retaining the Characters assigned to

them therein, must be carried out under the inspection, and to the satisfaction of the Society's Surveyors. Ships or machinery repaired at Ports where there is no Surveyor to this Society must be surveyed by one of the Society's Surveyors at the earliest opportunity.

Section 23. Parties considering the repairs suggested by the Surveyor to be unnecessary or unreasonable may appeal to the Committee, who will direct a special survey to be held; but should the opinion of the Surveyor be confirmed by the Committee, then the expense of such special survey is to be paid by the party appealing.

Section 24. The Surveyors to the Society not to be permitted (without the especial sanction of the Committee) to receive any fee, gratuity, or reward whatsoever for their own use or benefit, for any service performed by them in their capacity of Surveyors to this Society, on pain of immediate dismissal.

Section 25. The Surveyors will be directed to attend on Special Surveys of ships or machinery while building or under damage or repair, when required by Merchants, Shipowners, or Underwriters; the charge for which is to be regulated according to the nature and extent of the service performed. In all cases, the application for the assistance of the Surveyors must be made in writing addressed to the Secretary.

FUNDS.

Section 26. The Funds to be under the authority and control of the Committee, and a statement of the Receipts and Expenditure to be annually printed for the information of the subscribers.

Section 27. The following Fees to be charged to the Owners of ships prior to their vessels being classed and registered in the book:—

I.

CLASSING FEES.

For First Entry of Class in the Register Book.

For each Ship	unde	er 200	Tons			 	 £1	0	0
Ditto	of	200	and un	der 500	Tons	 	 2	0	0
Ditto	of	500	,,	1,000	,,	 	 3	0	0
Ditto	of	1,000	,,	2,000	,,	 	 4	0	0
Ditto	of	2,000	and up	wards		 	 5	0	0

For First Entry of Notification "LMC" in the Register Book.

For each Ship	under	100 r	registered HP.	 	 £1	0	0
Ditto	of	100 a	and under 300 HP.	 	 2	0	0
Ditto	of	300 a	and above	 	 3	0	0

II.

OFFICE OR REGISTRATION FEES BY THE SOCIETY'S NON-EXCLUSIVE SURVEYORS.

(A.

Chargeable on Vessels surveyed, for Special Surveys No. 1, No. 2, and No. 3.

For each Shi	p under 500	Tons			 	£0 10	0
Ditto	of 500	and under	1,000 T	ons	 	1 0	0
Ditto	of 1,000	0 ,,	2,000	,,	 	1.10	0
Ditto	of 2.000	and upwa	rds			2 0	0

(B.)

For all other Surveys which have to be Reported to the Committee on Official Forms.

For each Ship £0 10 0

In cases where Surveys are held on the hulls and machinery of vessels, this fee is to be charged only on one of the Surveys.

SPECIAL SURVEYS.

- Section 28. 1. For ships built under the special superintendence of the Surveyors (to entitle them to the distinctive mark \clubsuit), 1s. per ton for the first 1,000 tons, and 6d. per ton for every ton beyond 1,000 tons. No fee, however, shall be less than £7 0s. 0d.
- 2. For machinery or new boilers built under the special superintendence of the Surveyors (to entitle them to the distinctive mark 🛧 in red):—
- 3. For engines and boilers up to 200 horse-power, 3 shillings per horse-power. For engines over 200 horse-power, 3 shillings for the first 200 horse-power, and 1 shilling per horse-power above 200. No fee to be less than £8 0s. 0d.
- 4. The following rule is to be used for determining the Nominal Horse Power of Engines in regulating the fees for their survey, viz.:—

NHP=
$$\frac{P+340}{1000} \left(\frac{D^2 \sqrt{S}}{100} + \frac{H}{15}\right)$$
 where the boiler pressure is below 160 lbs.

$$=\frac{P+590}{1500}\left(\frac{D^2\sqrt{S}}{100}+\frac{H}{15}\right)$$
 where the boiler pressure is 160 lbs. or above.

If the boilers are fitted with Forced Draught or Induced Draught appliances, then $\frac{H}{12}$ is to be taken instead of $\frac{H}{15}$.

where D=diameter of L.P. Cylinder in inches.

s=stroke in inches.

H=heating surface in square feet.

P=working pressure in lbs. per square inch.

The square feet of heating surface represented by H will comprise the surfaces of the tubes, of the back tube plate or plates, and of the furnace and combustion chamber plating down to the level of the fire bars.

- 5. For the survey and testing of each Donkey Boiler, a fee of two guineas be charged.
- 6. For Surveys for damage, Surveys with a view to the reinstatement of class, or for other Surveys held at the request of the Owners, and for the Survey of Ships for Restoration, Continuation, or the character A in Red, and for Occasional Surveys and Surveys of repairs by the Society's Surveyors at Foreign ports, a charge will be made according to the nature and extent of the service performed.

SPECIAL PERIODICAL SURVEYS, Nos. 1, 2, and 3.

For the special periodical surveys of Iron and Steel Vessels, when such surveys are held by the Society's exclusive Surveyors in the United Kingdom.

					S.S. No. 1.	S.S. No. 2.	S.S. No. 3.
					£ s.	£ s.	£ s.
For Vessels	unde	r 200	tons gros	s	1 10	 2 10	 3 10
Ditto	,,	300	"		2 10	 3 10	 4 10
Ditto	"	400	"		3 0	 4 0	 5 0
Ditto	"	800	,,		3 10	 4 10	 6 0
Ditto	,,	1,200	**		4 0	 5 0	 7 0
Ditto	"	1,800	"		4 10	 5 10	 8 0
Ditto	**	2,500	,,		5 0	 6 0	 9 0
Ditto		3,500	"		5 10	 6 10	 10 0
Ditto	of	3,500	, ,,	and above	6 0	 7 0	 10 0

SPECIAL PERIODICAL SURVEYS OF MACHINERY.

Held at the Special Surveys, Nos. 1, 2, and 3.

For each Ship	unde	er 50	registered :	HP	 	 £2	10	0
Ditto	"	100	,,		 	 3	10	0
Ditto	"	150	,,		 	 4	0	0
Ditto	,,,	200	,,		 	 4	10	0.
Ditto	,,	300	,,		 	 5	0	0
Ditto	of	300	,,	and above	 	 5	10	0

SPECIAL ANNUAL SURVEYS OF BOILERS.

To be held when and after the Boilers are six years old.

For each Ship having 1 boiler	 £1 0.	0
And for each additional boiler (including the donkey boiler)	 0 10	0
But the fee in no case to be more than	 3 0	0

- 8. In cases where the caulking of ships is superintended and tested by the Surveyors, a special charge will be made, according to the tonnage of the ship.
- 9. All repairs which may be required on the Surveys above referred to, must be performed under the superintendence of the Society's Surveyors. (See also Section 22.)

MEM.—It is to be understood that in all cases where travelling expenses are incurred by the Surveyors in connection with the above services, they are to be defrayed by the parties interested in the same.

Section 29. The class of a vessel is liable to be withheld, or, if already granted, may be withdrawn or expunged from the Register Book in the case of non-payment of any fees or expenses chargeable on account of such vessel.

Section 30. Certificates of Character, on the Form No. 7, or of "LMC," or "B&MS," on Forms Nos. 10 or 11, signed by the Chairman, the Deputy-Chairman, or the Chairman of the Sub-Committee of Classification, and countersigned by the Secretary, will be granted on application.

FREEBOARD.

Section 31. Fees for the Survey for, and assignment of, Freeboard to vessels :-

For Classed	Vessels	under	: 300	tons	gross			 	£1	1	0	
Ditto	ditto	of	300	tons	and under	1000	tons gross	 	2	2	0	
Ditto	ditto		1000	,,	"	2000	,,	 	3	3	0	
Ditto	ditto		2000	,,	,,	3000	,,	 	4	4	0	
Ditto	ditto		3000	,,	,,	4000	,,	 	5	5	0	
Ditto	ditto		4000		and above			 	6	6	0	

Section 31a. Rules, complete, 10s. each copy. If for Wood Ships and Composite Ships, 5s. For Iron and Steel Ships, 5s.

LONDON.

26th April, 1900.


LLOYD'S REGISTER

OF

BRITISH AND FOREIGN SHIPPING.

RULES FOR STEEL VESSELS.

1900-1901.

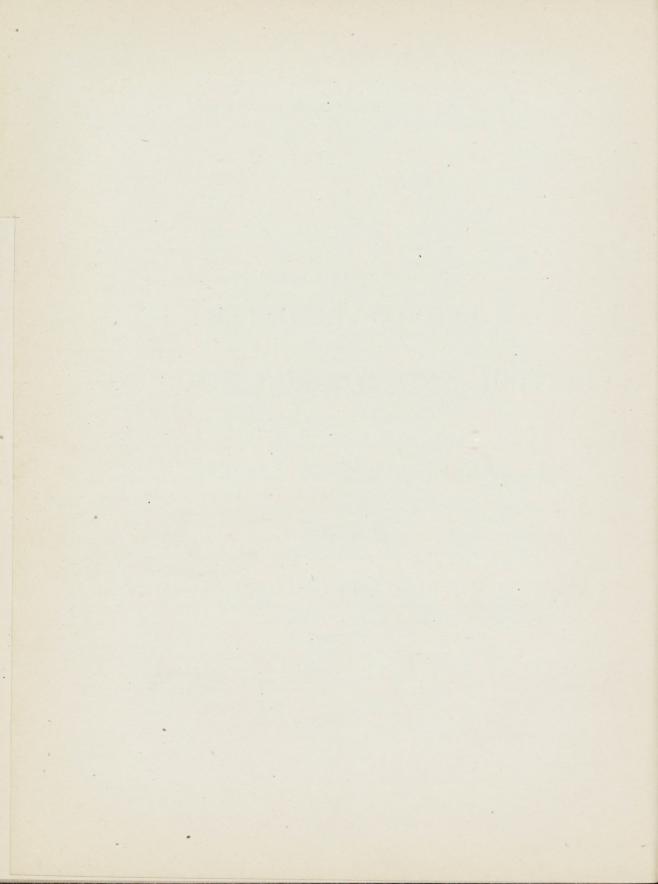

RULES

FOR

THE BUILDING AND CLASSIFICATION OF STEEL VESSELS.

1. Steel Vessels will be classed A with a Numeral prefixed, so long as, on careful annual and periodical Special Surveys, they are found to be in a fit and efficient condition for the safe conveyance of dry and perishable cargoes.

It is to be distinctly understood that the numerals prefixed to the letter A do not signify terms of years, but are intended for the purpose of comparison only; the A character assigned being for an indefinite period, subject to annual and periodical Survey as hereinafter described.

- 2. 100A, and 90A, will denote vessels that have been built in accordance with, or equal to, the Rules, and Tables S 1 to S 8. Deviations from the Rules will be allowed, provided that a sketch of the midship section, plans, &c., showing the proposed scantlings and arrangements in each case, be first submitted through the resident Surveyors, and approved by the Committee; and provided also that the vessels be built in accordance with the approved plans, under the survey of the Surveyors of this Society.*
- 3. Vessels which do not fulfil the requirements for the 100A class, but which are superior to vessels built on the 90A scale, may, if the Committee approve, be classed 95A.
- 4. If, upon survey of any vessel, material reduction is found to have taken place in the thickness of the plating and angles, the comparative numeral prefixed to the A will be reconsidered by the Committee.
- 5. In the cases of vessels intended to load or discharge while lying aground, it is recommended that the bottoms be additionally strengthened, in order to withstand the exceptional strains to which they may be subjected.
- 6. Vessels which are intended for special trades or purposes, and which are considered by the Committee to be fit for the contemplated employment, may be classed A, provided all the details of the proposed scantlings and arrangements be submitted to the Committee and approved by them; and provided the approved plans be carried out to the satisfaction of the Society's Surveyors.
- 7. To the class A, in such cases as those referred to in paragraph 6, will be affixed a designation, showing the particular trade or purpose for which the vessels are intended, thus:—A "For River purposes only"; A "For Tug purposes"; A "Fishing Smack"; A "For Channel purposes"; &c.
- 8. In the cases of vessels intended for Channel purposes, the particular Channel will be defined thus: "Bristol Channel," "Irish Channel," "English Channel," "Newhaven—Dieppe," &c. Moreover, as a condition of the classification of a vessel intended for Channel purposes, a minimum freeboard must be submitted to and approved by the Committee; and the freeboard thus sanctioned must be inserted in the Certificate and in the Register Book, and marked on the vessel's sides as hereafter described.†

In all such cases, if the vessel has for any reason forfeited her character, the freeboard assigned as a condition of classification will be omitted in reprinting the Register Book, unless the character be previously reinstated.

STI

RU

^{*} In vessels building, or to be built, under contract for classification, deviations from the Rules will not be allowed by the Committee, unless the Builder shall previously obtain the sanction of the Owner.

[†] See Notice of Freeboard requirements printed at end of the Rules.

9. In cases in which the freeboard assigned to a vessel is a condition of the class, the words "with freeboard" will be inserted under the character in the Register Book; and any vessel classed with this condition, which proceeds to sea with a less freeboard than that approved by the Committee, or on which the freeboard mark is placed higher than the position assigned by the Committee, will be liable to have her class expunged from the Register Book.

10. The efficient state and condition of the whole of a vessel's equipment will be designated by the figure 1 placed after the character assigned to the vessel; and in cases in which the equipment is found insufficient in quantity or defective in quality, a dash thus—, will be inserted in place of the figure 1.

11. To entitle vessels classed A "For Channel Purposes" to the Figure 1, the equipment of Anchors and Chain Cables, &c., should be as required by Table 22, with the exception that not more than two bower anchors and one stream anchor need be supplied. The first bower anchor should be of the full weight required by the table, and the second bower may be 15 per cent. lighter. This rule, however, applies only to vessels intended for short passages.

12. In vessels classed "For Channel Purposes" which are intended for longer voyages, such as the Queenboro' and Flushing, the Channel Islands, or the Irish Sea service, the equipment must be in

accordance with the requirements of Table 22.

13. When the rules as regards surveys on the hull, machinery or boilers of a steam vessel, or on the hull, masts, spars, or rigging of a sailing vessel have not been complied with, so that the vessel is not entitled to retain her class in the Register Book, the character will be expunged with a red line, under which the date of such withdrawal of class will be recorded.

14. When it is found from reported defects in the hull, machinery or boilers of a steam vessel, or in the hull, masts, spars, or rigging of a sailing vessel, that the vessel is not entitled to retain her class in the Register Book, the character will be expunged with a black line, under which the date of such withdrawal of class will be recorded.

15. When the class of a vessel is withdrawn from the Register Book by the Committee in consequence of a request from the Owner, the fact will be indicated by the insertion of three dots (...) in column 7 of the list of steam vessels and column 8 of the list of sailing vessels.

16. To entitle STEEL VESSELS to retain the Characters assigned to them in the Register Book, they are required to be subjected to the following Special Surveys, designated No. 1, No. 2, and No. 3, respectively. In addition, the machinery and boilers of steam vessels are required to be submitted to the periodical surveys described on pages 111 and 112.

17. The periods at which the surveys on the hull are intended to be held, in cases of vessels classed from 100A to 90A inclusive, are when a vessel is 4 years, 8 years, and 12 years old respectively, and at

like periods from the date when the No. 3 Survey was held.*

N.B.—In order to prevent the disappointment arising from Ships losing their Characters from want of survey, it is hereby intimated that the duty of giving Notice of Periodical Surveys required by the Rules, or when repairs are necessary in consequence of damage or from other causes, rests with the Owners, Masters, or Agents.

^{*} Should a ship at any time be submitted to Special Survey No. 3 before being 12 years old, the Subsequent Special Surveys will be Nos. 1, 2 and 3, consecutively, dating from the completion of such No. 3 Survey.

- 18. In every case the date of build of a vessel is to be reckoned from the last date of the survey for first entry of classification, when such survey is completed within six months of the date of launching: but when the first entry survey is not completed within that period then the date of build will be reckoned from six months after the date of launching. The date when the special periodical surveys respectively become due is to be calculated from the date of build, as above described, or the last date of the No. 3 Survey.
- 19. Similarly, vessels classed A for special purposes must be subjected to a special survey every three years, as per Nos. 1, 2, and 3, and afterwards as per Nos. 1, 2, and 3, consecutively.
- 20. In any case in which it may suit the convenience of the Owners, the special surveys Nos. 1 and 2 may be held at any time within twelve months previous to the expiration of the period when they severally become due, and the special survey No. 3 may be held at any time before the date when it becomes due.
- 21. To facilitate the arrangements of Owners, a portion only of the requirements of the foregoing special surveys may be complied with at the expiration of the time specified, provided that the whole of the survey be completed within twelve months from the date when the survey became due.
- 22. When a special survey is only partially held, the Surveyors must give the Owners or their Agents written notice of the parts not surveyed, and also report the facts to the Committee.
- 23. If a vessel is at a port in the United Kingdom after the expiration of the prescribed period for survey, and is not subjected to the special survey then due before leaving the United Kingdom, the word "Expired" will be inserted against her character in the Register Book; and in no case will a vessel be allowed to retain her class if she has not been subjected to the whole of the requirements of the requisite special survey within twelve months from the date when the survey became due.
- 24. Vessels which have undergone either of the foregoing examinations will be noted in the Register Book, thus:—ssNo. 1-99, ssNo. 2-99, ssNo. 3-9,99, 2nd ssNo. 3-9,99, indicating the special survey and date thereof.
- 25. Whenever the engines or boilers are taken out, the bearers, with the floor-plates, keelsons, rivets, &e., under them, are to be surveyed; and whenever the bottom plating is to be cemented a survey is to be held prior to the cement being laid.

*Survey No. 1.

- 1. The vessel to be placed on blocks of sufficient height in a dry dock or on a slipway, proper stages to be made and the holds and peaks to be cleared; the limber boards and ceiling equal to not less than two strakes fore and aft on each side removed, one of which is to be taken from the bilges. Where the ceiling in the flat of bottom is fitted in hatches, the whole of the hatches and one strake of ceiling at the bilges are to be removed, † and both surfaces of outside plating exposed, ‡ and cleaned and coated where necessary.
 - 2. The coal bunkers to be cleared for examination, and ceiling removed as in the holds.

† In the case of vessels fitted with double ceiling, application may be made to the Committee if any relaxation be equired.

‡ In cases where the inner surface of the bottom plating is coated with cement, or asphalt, if the coating be carefully inspected and tested, by beating or chipping, and found sound and adhering satisfactorily to the steel, its removal may be dispensed with.

^{*} To facilitate the arrangements of Owners, a portion only of the requirements of the foregoing special surveys may be complied with at the expiration of the time specified, provided that the whole of the survey be completed within twelve months from the date when the survey became due. The Surveyors in such cases are to give the Owners, or their agents, written notice of the parts not surveyed, and are also to report the same to the Committee.

- 3. In all vessels the masts, spars, and general equipment must be in good and efficient condition.
- 4. If the vessel has a double bottom, the ceiling must be removed therefrom and the efficiency of the tanks tested by a head of water to the height of the light water-line. Where deep water ballast tanks are fitted, their water-tightness to be tested by a head of water not less than 8 feet above the crown of the tank.
- 5. When a deck originally required to be 4 inches thick is worn to 3 inches, $3\frac{1}{2}$ inches to $2\frac{3}{4}$ inches, 3 inches to $2\frac{1}{2}$ inches, it must be renewed, unless it be found on survey to be in good condition, when on application the case will receive the consideration of the Committee.
- 6. Note.—At the Special Survey No. 1 succeeding No. 3, the chain cables are to be ranged for inspection. When any length of a chain cable is worn so that the sectional area at its most worn part is reduced by $\frac{1}{5}$ th from the original area, it should be renewed.
- 7. In Steam Vessels the engines and boilers must be examined and favourably reported on by the Society's Engineer-Surveyors.
- 8. The steam steering engine, its connections, the steering rods, chains, blocks, rudder quadrant, tillers and steering gear to be carefully examined and the condition of the various parts to be stated by the Surveyor on his report of survey.
 - 9. For periodical Surveys of Engines and boilers, see pages 111 and 112.

*Survey No. 2.

- 1. The vessel to be placed on blocks of sufficient height in a dry dock or on a slipway, proper stages to be made and the holds and peaks to be cleared; the limber boards and ceiling not less than three strakes fore and aft on each side removed, one of which is to be taken from the bilges. Where the ceiling in the flat of bottom is fitted in hatches, the whole of the hatches and one strake of ceiling at the bilges are to be removed,† and both surfaces of outside plating exposed,‡ and cleaned and coated where necessary.
 - 2. The coal bunkers to be cleared for examination, and ceiling removed as in the holds.
- 3. The windlass at this and all subsequent alternate special surveys to be unhung, where necessary, and its wood linings sufficiently stripped, for examination. The chain cables are also to be ranged for inspection at this and all subsequent special surveys. When any length of a chain cable is worn so that the sectional area at its most worn part is reduced by ¹/₅th from the original area, it should be renewed.
 - 4. In all vessels the masts, spars, and general equipment must be in good and efficient condition.
- 5. If the vessel has a double bottom, the ceiling must be removed therefrom, and the efficiency of the tanks be tested by a head of water to the height of the light water-line. Where deep water ballast tanks are fitted, their water-tightness to be tested by a head of water not less than 8 feet above the crown of the tank.
- 6. After a vessel has passed No. 3 Survey, in addition to the survey prescribed for No. 2, when that survey becomes due, ceiling should be lifted at other parts of the vessel where deemed necessary by the Surveyors to enable them to satisfy themselves as to the condition of the vessel.
- * To facilitate the arrangements of Owners, a portion only of the requirements of the foregoing special surveys may be complied with at the expiration of the time specified, provided that the whole of the survey be completed within twelve months from the date when the survey became due. The Surveyors in such cases are to give the Owners, or their agents, written notice of the parts not surveyed, and are also to report the same to the Committee.
- † In the case of vessels fitted with double ceiling, application may be made to the Committee if any relaxation be required.
- † In cases where the inner surface of the bottom plating is coated with cement, or asphalt, if the coating be carefully inspected and tested, by beating or chipping, and found sound and adhering satisfactorily to the steel its removal may be dispensed with.

- 7. When a deck originally required to be 4 inches thick is worn to 3 inches, $3\frac{1}{2}$ inches to $2\frac{3}{4}$ inches, 3 inches to $2\frac{1}{2}$ inches, it must be renewed, unless it be found on survey to be in good condition, when on application the case will receive the consideration of the Committee.
- 8. The steam steering engine, its connections, the steering rods, chains, blocks, rudder quadrant, tillers and steering gear to be carefully examined and the condition of the various parts to be stated by the Surveyor on his report of survey.
- 9. In Steam Vessels the engines and boilers must be examined and favourably reported on by the Society's Engineer-Surveyors. See pages 111 and 112.

*Survey No. 3.

- 1. TO BE HELD BY TWO SURVEYORS, ONE TO BE AN OFFICER OF THE SOCIETY.—The vessel to be placed on blocks of sufficient height in a dry dock or on a slipway; proper stages to be made and the holds and peaks to be cleared; all the close ceiling to be removed, so that the rivets, plates of keel, and flat of bottom may be thoroughly examined; coal-bunkers of steam-vessels to be cleared, the whole of the frames, stringers, hooks, floor-plates, keelsons, engine and boiler bearers, ends of beams, water-tight bulkheads, rivets and inner surface of the plating to be exposed, and where side lights are fitted, the condition of the plating in way of the same to be ascertained. All oxidation to be removed by being cut or beaten off the several parts above named, also from the outside plating, rivets, keel, stem, sternpost, and rudder; the planksheers and waterways, if of wood, to be scraped bright. When the vessel is thus prepared, the Surveyors are to ascertain the thickness of the plating by having holes drilled in such parts as may be deemed necessary, and to furnish a detailed statement of the thicknesses in their report.
- 2. Such parts as may be found defective, or materially less than the required substance by Rule, are to be removed and replaced with proper materials, equal in substance and quality to the original construction. The planksheers, waterways, flat of decks and their fastenings, are also to be examined and made good where necessary.
- 3. In all vessels the masts, spars, and general equipment must be in a good and efficient condition. All mast and bowsprit wedging at this and subsequent Special Surveys to be removed, unless the plating of iron or steel masts and bowsprits is doubled in way of the same, when it will only be necessary to remove the wedging at the Special Surveys, No. 3. Iron or steel masts, bowsprits, and yards to be carefully tested by hammering and if the plates are considered by the Surveyors to be materially wasted at any part, the thickness is to be ascertained by drilling. In sailing vessels the standing rigging should be lifted and the service and parcelling stripped off the nips, bends, and splices for examination, unless the rigging has been recently lifted, when particulars of the case should be submitted for the consideration of the Committee.

Note.—The masts and spars are to be subject to examination by the Surveyors when deemed necessary by them on other occasions besides Special Surveys.

* To facilitate the arrangements of Owners, a portion only of the requirements of the foregoing special surveys may be complied with at the expiration of the time specified, provided that the whole of the survey be completed within twelve months from the date when the survey became due. The Surveyors in such cases are to give the Owners, or their agents, written notice of the parts not surveyed, and are also to report the same to the Committee.

† In cases where the inner surface of the bottom plating is coated with cement, or asphalt, if the coating be

carefully inspected and tested by beating or chipping and found sound, and adhering satisfactorily to the steel its

removal may be dispensed with.

† Where the deterioration in thickness is widespread, and it is not deemed advisable by the Owner to renew the material, on a detailed report being made by the resident Surveyor, the class of the vessel will be reconsidered.

- 4. If the vessel has a double bottom, the ceiling must be removed therefrom and the efficiency of the tanks tested by a head of water to the height of the light water-line. Where deep water ballast tanks are fitted, their water-tightness to be tested by a head of water not less than 8 feet above the crown of the tank.
- 5. When a deck originally required to be 4 inches thick is worn to 3 inches, $3\frac{1}{2}$ inches to $2\frac{3}{4}$ inches, 3 inches to $2\frac{1}{2}$ inches, it must be renewed, unless it be found on survey to be in good condition, when on application the case will receive the consideration of the Committee.
- 6. The chain cables are to be ranged for inspection. When any length of a chain cable is worn so that the sectional area at its most worn part is reduced by $\frac{1}{5}$ th from the original area, it should be renewed.
- 7. The steam steering engine, its connections, the steering rods, chains, blocks, rudder quadrant, tillers and steering gear to be carefully examined and the condition of the various parts to be stated by the Surveyor on his report of survey.
- 8. In steam vessels the engines and boilers must be examined and favourably reported on by the Society's Engineer-Surveyors. See pages 111 and 112.

Second Special Survey No. 3.

- 1. The vessel must be submitted to the same survey as before described for Survey No. 3, with the following additions:—
- 2. The condition of the scantlings must be ascertained, the shell plating to be drilled at such parts as the Surveyors may consider necessary to satisfy themselves as to its thickness, the number of holes on each side in no case being less than the number of strakes of plating not covered with cement in the vessel.
- 3. Care should be taken especially to ascertain the extent of deterioration of steamers in way of the side bunkers and boilers.
- 4. A sketch showing the thickness at the parts where drilled is to accompany the report on the vessel, for the consideration of the Committee.
- 5. The plating in way of cement in the bottom need not be drilled, provided the cement be found to be adhering satisfactorily to the plating, and the Surveyors consider drilling unnecessary.
- 6. In cases where the requirements of the Second Special Survey No. 3 may have been fully complied with, before the expiration of the period when the survey becomes due under the Rules, the fact will, if desired by the Owners, be noted in the Register Book. Such notation, however, will not exempt a vessel from the compliance with the requirements of the survey as regards drilling when she is 24 years old, or at the first Special Survey held after that time, unless the drilling has been done at the previous Special Survey.

SURVEYS WHILE BUILDING.

- 1. The Surveyors are to examine during the progress of a vessel, the materials and workmanship, from the laying of the keel to her completion; and to point out as early as possible anything that is objectionable, or that is not in accordance with the Rules, or with the plans approved by the Committee for the particular vessel.
 - 2. Vessels built under the Special Survey of the Society will be entitled to the distinctive mark +.
- 3. In steam vessels built under Special Survey, the Machinery and Boilers must also be constructed under Special Survey. See pages 99 to 111.

- 4. In steam vessels the machinery and boilers are to be inspected throughout construction, the boilers tested by hydraulic pressure, and the machinery tested under steam. Machinery certificates will be granted, and notifications thereof made in the Register Book, thus: "LMC 9,99" in red (i.e. LLOYD'S MACHINERY CERTIFICATE, September, 1899).
- 5. In cases of machinery or new boilers being built under Special Survey, the distinguishing mark will be noted in red, thus: "**HLMC," or "***NE&B," or "**NB."
- 6. In cases in which the machinery or boilers are of novel description, or in which experience has not sufficiently shown the safety of the principle or mode of application involved, the words "Machinery Experimental," or "Boiler Experimental," will be inserted under the class of the vessel in the Register Book; but if in the opinion of the Committee the machinery or boilers are so far inefficient as to imperil the vessel's safety, no class will be assigned.
- 7. If the hull of a steamer has been built in accordance with the Rules, a provisional certificate will be issued, if desired, stating the class to which the vessel will be entitled when the machinery and boilers have been fitted on board in accordance with the Rules, and the Committee's requirements otherwise complied with.
- 8. For requirements relating to the survey and construction of engines and boilers, see pages 99 to 111.

RULES FOR THE BUILDING OF STEEL VESSELS.

- Section 1. 1. In all cases where it is proposed to build ships of steel for classification in the Register Book, a sketch of midship section with longitudinal, deck, and other plans showing the details of the scantlings and arrangements, must in the first place be submitted for the approval of the Surveyors, and in all cases where deviations from the rules are proposed they must be submitted for the approval of the Committee, and the vessel must be built under special survey to the plans approved and otherwise in accordance with the following Rules, subject to such modifications as may be deemed necessary by the Committee.*
- 2. The scantlings given in Tables S 1, S 2, and S 3, are intended for vessels the length of which does not exceed eleven times their depth from the top of keel. Where this proportion is exceeded see Sec. 46 and Table S 6.
 - 3. For proportions of breadth to length see Table S 5.
 - 4. The measurements for regulating the scantling numbers and proportions are to be taken as follows:-

LENGTH.

- 5. The length to be measured from the after part of the stem to the fore part of the stern-post on the range of the upper deck beams in one, two, and three decked and spar-decked vessels, but on the range of main deck beams in awning-decked vessels.
- 6. In vessels where the stem forms a cutwater the length is to be measured from the place where the upper deck beam line would intersect the after edge of stem if it were produced in the same direction as the part below the cutwater.

BREADTH.

- 7. The breadth is in all cases to be the greatest moulded breadth of the vessel.
- *The rivets, keel, stem, stern-frame, rudder and pillars may be of iron of the sizes given by the rules for steel vessels; also the floors, girders, and top plating of double bottoms, coal bunker, and other bulkheads, shaft tunnels, casings round engines, hatchway coamings, poops, forecastles, bulwarks and deck erections may be of iron of the size required by the rules for iron vessels. All liners may be of iron, but no other parts of such ships are to be of iron without the special sanction of the Committee.

DEPTH.

8. The depth in one and two-decked vessels is to be taken from the upper part of the keel to the top of the upper deck beam at the middle of the length, assuming a normal round up of beam of one quarter of an inch to a foot of breadth. In Spar-decked vessels and Awning-decked vessels the depth is to be taken from the upper part of the keel to the top of the main deck beam at the middle of the length, with the above normal round up of beam. For "Three-deck" steam vessels see Section 41.

SCANTLINGS.

Section 2. 1. The scantlings and spacing of the frames, reversed frames, and floor-plates, and the thickness of bulkheads in Table S 1 are regulated by numbers, which are produced as follows:—

2. For one and two-decked vessels.—The number is the sum of the measurements in feet arising from the addition of the half-moulded breadth of the vessel at the middle of the length, the depth from the upper part of the keel to the top of the upper deck beams, with the normal round-up, and the girth of the half midship frame section of the vessel, measured from the centre line at the top of the keel to the upper deck stringer plate.

3. For "Three-deck" steam vessels.—The number is produced by the deduction of 7 feet from the

sum of the measurements taken to the top of the upper deck beams. (See Section 41.)

4. For Spar-decked vessels and Awning-decked steam vessels.—The number is the sum of the measurements in feet taken to the top of the main deck beams, as described for vessels having one or two decks. (See Sections 42 and 43.)

5. The scantlings of the keel, stem, stern-frame, keelson, and stringer plates, the thickness of the outside plating and deck; also the scantlings of the angle bars on beam stringer plates, and keelson and stringer angles in hold, as in Tables S 2, S 3, S 3A, S 5, and S 7, are governed by the number obtained by multiplying that which regulates the size of the frames, &c., by the length of the vessel.

6. In vessels of exceptional fineness of form, intended for passenger traffic, or to carry a limited amount of cargo with a fixed freeboard, a modification in the scantlings will be admitted, subject to all particulars being submitted by the Builders, and the deviations from the scantlings required by the rules being sanctioned by the Owner.

7. For Turret deck vessels—Depth.—The depth is to be taken from the upper part of the keel to the top of a normal beam line drawn through the point where a vertical line at the quarter breadth of the vesse cuts the upper surface of the vessel's deck; or, the upper surface continued, where the Turret is nearly one-half the breadth of the vessel, and its transverse section is of rounded form at the base. (See

sketch A, page 131.)

8. Scantling Numbers.—In vessels of the Turret deck type, having no sheer, the first number for seantlings may be reduced by one-half of the standard mean sheer, as set forth in the Freeboard Tables, for a length equal to twelve times the moulded depth of the vessel, measured from top of keel to top of normal beam line at base of Turret, provided that the breadth of the Turret is not greater than one-half the moulded breadth of the vessel, and the radii of the gunwale and base of Turret curves be from 20 to 25 per cent. and 15 to 20 per cent. respectively of the moulded depth.

- 9. For vessels of under 24 feet in depth, the measurements are to be taken to the normal beam line as described, but for vessels 24 feet in depth and above, the measurements are to be taken to a point 7 feet below the normal beam line at base of Turret. (See sketch B, pages 132 & 133.)
- 10. The second number for scantlings is to be obtained by multiplying the first number by the length of the vessel.
- 11. In vessels of this type having strongly constructed continuous superstructures, the material of the sheerstrakes, stringer plates and deck plating, as arranged in a vessel of ordinary form should be distributed over the plating of the upper part of the vessel, and the sides of the superstructure, provided that the thickness of the rounded deck plating is not less than $\frac{1}{20}$ of an inch below that of the side plating and that the turret sheerstrake is not less than $\frac{1}{20}$ of an inch below that of the main sheerstrake, as given in Table S 2. Where a second deck is dispensed with, compensating strength must be afforded either by increasing the depth of the web frames, and extending them to the upper part of the rounded gunwale, where web frames are fitted in lieu of hold beams, or by other means.
- 12. If in such vessels of under 24 feet depth the length exceeds eleven times the depth, additional strength will be required, as shown in Table S 6, but in vessels of 24 feet depth and above the proportions are to be taken from the depth measured to a point 7 feet below the normal beam line at base of Turret, and they may be 13 and under 14 depths in length, before they are required to have the remaining extra strength at upper part prescribed for vessels of 11 to 12 depths in length, and above these proportions in the same ratio; but in no case will the material at the upper part, and the number and thickness of steel or iron decks, be required to be greater than that of a three deck vessel of the same dimensions.


QUALITY OF STEEL.

- Section 3. 1. The steel will be required to withstand the whole of the following tests, to be applied at the Steel Works under the personal inspection of the Society's Surveyors, to samples selected by them from every charge or cast employed in the manufacture of the material, and these samples when marked by them for testing, should be followed by the Surveyors through the different stages of preparation until the tests are completed.
- 2. The Committee will require that every plate, beam, and angle supplied for these ships shall be clearly and distinctly stamped by the Manufacturer in two places where the brand cannot be conveniently sheared off, after they have been tested, the brand to be similar to the following, thus:—
 denoting that a shearing from the plate or angle so marked has successfully been bent cold after being tempered as described in the temper test which follows, and that the plate or angle in question is capable of withstanding the whole of the tests hereafter described; and the Committee will require the Surveyors, when in constant attendance at the Steel

Works, to satisfy themselves, so far as may be practicable, that these conditions are being complied with in a bond fide manner.

- 3. All plates, beams, and angles to be legibly stamped in two places with the manufacturer's name or trade mark, and the place where made, which is also to be stated in the report of survey.
- 4. Should the samples selected by the Surveyor not fulfil the test requirements, the plates or angles from which they were cut are to be rejected, and further tests are to be made before any material from the same charge can be accepted.

- 5. When one of the Society's Surveyors is not in constant attendance at the Steel Works for the purpose of seeing the material tested, the Committee will require that tensile, and temper and cold bend tests shall be applied, either at the Steel Works or at the Ship-yard, to not less than one plate, angle bar, or bulb plate in every batch of 50, or a batch of less number; but the Surveyor is not to select samples for testing until the material has been tested, stamped, and appropriated by the manufacturer. The sample, when marked by the Surveyor for testing, is to be followed by him when practicable through the different stages of preparation until the tests are completed. Should the samples tested not fulfil the test requirements, the whole of the material from the charge which produced the samples which fail to withstand the tests prescribed is to be rejected, or further tests are to be applied to a sample from each of the other charges of which the batch is composed. In the event of any of these samples also failing, the whole of the material from the same charge or charges is to be rejected as in the first instance.
- 6. Before these sample tests have been applied to a batch of steel submitted for check testing, the Surveyor is to be furnished with a Certificate by the Manufacturer to the effect that the Society's requirements as to the testing of steel have been complied with in the case of the batch in question.
- 7. In the event of the material failing, in any case, to withstand the prescribed tests, the brands approved by the Committee and stamped on the plates, beams, and angles by the Manufacturer are to be defaced by punch marks extending beyond the brand in the form of a cross, thus:—
 denoting that the material is rejected.



STEEL SUPPLIED IN INGOTS.

9. Where steel is not produced in the steel works at which it is rolled, a Certificate is to be supplied to the Surveyor testing the material, setting forth the name of the Manufacturer who supplied it, the process of manufacture, and the numbers of the "charges," for reference to the books of the Manufacturer if considered necessary, and the number of the "charge" is to be marked on each plate or angle for the purpose of identification.

TESTS.

10. Strips cut lengthwise or crosswise of the plate, angle, and bulb steel, to have an ultimate tensile strength of not less than 28, and not exceeding 32 tons per square inch of section, with an elongation equal to at least 20 per cent. on a length of 8 inches before fracture in samples \(\frac{8}{20} \) of an inch and above in thickness, and 16 per cent. in samples below this thickness. Steel plates intended for garboard strakes, if specially marked for identification, may be tested to within the minimum limit allowed for boiler plates, viz., 26 tons tensile strength per square inch.

11. Steel angles intended for the framing of vessels, and bulb steel for beams, may have a maximum tensile strength of 33 tons per square inch of section, provided they be capable of withstanding the bending tests, and of being efficiently welded.

12. Strips cut from the plate, angle, or bulb steel to be heated to a low cherry-red, and cooled in water of 82° Fahrenheit, must stand bending double round a curve of which the diameter is not more than three times the thickness of the plates tested.

13. In addition to the temper tests required for *every* plate and angle, cold bend tests are to be made from each plate or bar tested for tension; also from all garboard plates, and all plates where it is known they are to be flanged.

14. In addition to this, samples of plates and bars should be subjected to cold bending tests at the discretion of the Surveyors.

RIVETS.

15. The steel used for rivets to be of special quality, soft and ductile, and samples of the rivets should be tested by being bent both hot and cold, by flattening down the heads, and by occasional forge tests, in order to satisfy the Surveyors of their thorough efficiency.

(For List of Steel Manufacturers see pages 129 to 130b.)

WORKMANSHIP.

Section 4. 1. The workmanship to be well executed, and submitted to the closest inspection, and amended where necessary before coating or painting: it is not, however, intended to prevent the coating of the plates inside in the way of the frames.

2. The black oxide or "millscale" must be removed from the surfaces before coating or painting,

which should be delayed as long as possible.

- 3. Experience has also shown that, as regards durability, it is highly desirable to place steel vessels in dry dock within a reasonably short time after being launched, for the purpose of cleaning and re-coating the bottom.
- 4. Stringer plates, sheerstrakes, garboard strakes, and all buttstraps, when above $\frac{10}{20}$ of an inch in thickness, are to be carefully annealed, or the holes sufficiently rimed after punching, to remove the injurious effect of the punching.

KEEL, STEM, STERN AND PROPELLER POSTS, AND TRANSOMS.

- Section 5. 1. The keel, stem, stern, and propeller posts are to be either scarphed or welded together, and to be in size according to Table S 2; if scarphed, the length of scarphs to be nine times the thickness given in the Table; and the rivet-holes required in the thin ends of them are to be drilled after the scarphs are fitted.
- 2. Where the garboard strakes are thicker than required by the Rules, the thickness of the keel may be proportionately reduced.
- 3. Where the keel and keelsons are made of several thicknesses of plates, their combined thickness to be the same as is required for a solid keel, as per Table S 2; and the butts of the several plates of which the keel is formed to be carefully shifted from each other.
- 4. When Hollow or Flat Plate Keels are adopted, their breadth and thickness are to be as given in Table S 2; and the strake of plating on each side adjoining the flat plate keel to be of the thickness required for the garboard strakes in the Table. Where the number is 26,000 and above, the flat-plate keel to be doubled for one half the vessel's length amidships.

- 5. Where flat plate keels are used, intercostal keelson plates, or vertical centre-plates, must be fitted close down on the keel, and connected to it by double angles of the dimensions given for keelson angles in Table S 3, riveted all fore and aft to the keel and keelson. (See also Section 9, paragraph 6.)
- *6. The butt-straps of flat plate keels are to be treble riveted, and as much thicker than the plates they connect as is required for bilge strakes.
- 7. The stem at its lower part is to be the same moulding as the keel, and attached to it by a scarph of the same length as the keel scarph; it may be gradually reduced from the height of the load-line to its head, where it may be three-fourths of the sectional area given in Table S 2.
- 8. The stern and propeller posts, and after end of keel, for single screw propelled vessels, to be of the size given in Table S 2, for stern frames, or of equal sectional area; the portion adjoining the keel to be tapered fair into it. In a sailing vessel, or paddle steamer, the sternpost may be reduced from the lower part of the rudder trunk to its head, where it may be three-fourths of the sectional area given in the Table; and in a steam vessel having a propeller frame, it may be reduced at the head to the size given for stems in Table S 2.
- 9. The portion of the forging of the stern frame forming part of the keel is to extend sufficiently forward for the after end of its scarph in sailing vessels and paddle steamers to be at least once and a half the frame space before the sternpost, and in screw-propelled vessels at least twice and a half the frame space before the propeller post.
- 10. The stern-post is to be extended sufficiently above the counter to be connected by two vertical angles of the frame size, to the whole depth of the transom-plate, which is to be fitted close against the stern-post. The transom-plate is to be not less than one and a half times the depth of, and the same thickness as, the midship floor-plates. In screw steamers whose plating number is 20,000 and above, the foremost or propeller post should extend sufficiently above the arch of the propeller-frame to be efficiently connected to plating on the beams, and to a deep transom-plate. (See Section 7, paragraph 7.)
- 11. Rudder braces are to be forged on the stern-post, and spaced from 4 feet to 5 feet 6 inches, are not to be less in depth than seven-tenths the diameter of the rudder head, and the thickness one-half the diameter of the pintles.
- 12. When cast steel stern-frames, rudders, steering quadrants, and tillers are fitted they must be subjected to percussive, hammering, and mechanical tests, in the presence of one of the Society's Surveyors, so as to insure the material being of ductile quality. Sketches of the proposed castings are to be submitted for the approval of the Committee. Where stern-frames are in more than one piece, the length of the scarphs should not be less than three times the width of the stern-posts, and the breadth one and a half times the width of the stern-posts, secured by not less than four rows of rivets.
- 13. The tests to be as follows:—A tensile test is to be made on a piece taken from each casting, and the extension on a length of 8 inches is not to be less than 8 per cent., and the tensile strength not less than 28 tons, nor more than about 35 tons per square inch. A cold bending test also to be made corresponding to each tensile test, and the sample to be one inch square and to bend cold before fracture through an angle of at least 90°.
- 14. Large stern-frames cast in one piece to be let fall on a hard flat ground (excavations being made to take the boss part and other projections), after being raised through an angle of 45°. Stern-frames cast in more than one piece, and rudders, steering quadrants and tillers, to be dropped on hard ground from

a height of from 7 to 10 feet, according to the design, shape, and weight of the casting. The casting in each case to be subsequently slung up and well hammered with a sledge hammer, not less in weight than 7 lbs., to satisfy the Surveyors that the castings are sound and without flaws existing either originally or developed as the result of the application of the preceding percussive tests.

FRAMES.

- Section 6. 1. The frames to be of the dimensions set forth in Table S 1, and to extend from the keel to the gunwale. They are to fit closely to the upper edge of the keel; and the after frames should be sufficiently apart transversely to admit of sound riveting and workmanship. At the extreme ends of the vessel the lower parts of the frames opposite to each other are to be lapped and riveted together. Where either raised quarter-decks, bridge-houses, poops, or forecastles, are constructed, the frames are to extend to their deck stringers respectively, except when constructed of a rounded form at the gunwale; they may then terminate at the lower part of the curve. In steamers having a tonnage co-efficient of 78 or having a full form at the fore part, between the collision bulkhead and the three-fifths length forward, the frames to be doubled from margin plate to margin plate of double bottoms, or to the turn of bilges where double bottoms are not fitted.
- 2. When the frames are butted on the keel they are to have not less than 3 feet lengths of corresponding angle bars, fitted back to back, to cover and support the butts and receive the plating for at least three-fourths the vessel's length amidships. Similar pieces of angle bar are to be fitted if the frames are butted elsewhere.
- 3. The rivet holes to be punched through from the faying surfaces of the frames, and they are not to be punched at the turn of the bilge until the frames are bent to the required shape; the holes in the way of the lands of the plating are to be drilled after the plating is wrought.
- 4. The spacing of the frames from centre to centre to range from 20 to 27 inches, according to the size of the vessel, which spacing should not be exceeded around the stern of the vessel at the knuckle. (See Table S 1.)

 FLOOR-PLATES.

Section 7. 1. The floor-plates to be in size at the middle line according to Table S 1, excepting in the engine space in steam vessels, where they must be $\frac{1}{20}$ of an inch thicker, and in the boiler space $\frac{2}{20}$ of an inch thicker. Where floor plates are $\frac{9}{20}$ of an inch in thickness and above they may be reduced $\frac{1}{20}$ of an inch for one-tenth the vessel's length before and abaft the three-fifths length amidships, and the remaining floors may be $\frac{2}{20}$ of an inch less in thickness than the midship floors. They are to be moulded not less than one-half their midship depth* at a distance of three-quarters the half breadth of the vessel set out from the middle line on the run of the frame, and not less at their extreme ends than the moulding of the frames; and they are to extend in a fair curve well up the bilges, in no case terminating lower at the outside of the frame than a perpendicular height of twice the midship depth of the floor above the top of keel. The ends of the floors to maintain the height prescribed for one quarter of the vessel's length amidships, they may then be gradually lowered forward and aft until the upper edges of the floor-plates are level (this place to be determined by the form of the vessel), from which to the ends they are to be gradually increased in depth, so as to efficiently connect the sides; and in the after peak of steam vessels they are to extend above the stern tube. The upper parts of the floors

* In vessels of unusually fine or full form the moulding should be modified to the approval of the Committee.

forward and aft are to be high enough to give ample room between the reversed frames on each side of the vessel for fitting the keelson angle bars. (See also Section 26, paragraph 2.)

- 2. A floor-plate to be fitted and riveted to every frame, and to be extended across the middle line, except where a vertical centre-plate is adopted, in which case the floor-plates are to be efficiently connected to it on each side by double vertical angles of not less size than the reversed frames.
- 3. When floors are made in two lengths, the butts are to be well fitted, and to have double butt-straps treble riveted; or, the floor-plates may be lapped and treble riveted.
- 4. Floor-plates to which the bulkheads are attached must be deeper than the adjacent floor-plates, to admit of the bulkheads being riveted to them above the reversed angle bars.
- 5. In the cases of vessels intended to load or discharge while lying aground, it is recommended that the bottoms be additionally strengthened, in order to withstand the exceptional strains to which they may be subjected.
- 6. WATERCOURSES are to be formed above the frames through all the floor-plates on each side of the middle line, also at the lower turn of the bilges in vessels of full form, as well as through the vertical centre-plate, and intercostal keelsons, when such keelsons are adopted, so as to allow water to reach the pumps freely.
- 7. TRANSOM-PLATES are to be fitted and connected to the frames, and to the stern-post, so as to efficiently support the counter. (See Section 5, paragraph 10.)

REVERSED ANGLES ON FRAMES.

Section 8. 1. Reversed angles on frames to be in size as per Table S 1

- 2. Vessels where the number for regulating the size of the frame is below 45, to have reversed angles riveted to every frame and floor-plate, extending across the middle line to the upper part of the bilges.
- 3. Vessels where the number as per Rule is 45 and below 57, to have reversed angles riveted to every frame and floor-plate, extending across the middle line to the upper part of the double angle stringer above bilges, and to the gunwale alternately; or, if the vessel is of a depth to require hold beams, the reversed angles are to extend to the upper part of the hold beam stringer angle and gunwale alternately.
- 4. All vessels, except those having an awning-deck, where the number as per Rule is 57 and upwards, to have reversed angles on every frame, extending alternately to the upper deck stringer plate, and top of angle bar on stringer plate next below it. In awning-decked vessels they are all to extend to the upper part of the main deck stringer angle bar. (See also Section 26, paragraph 4, Section 45, paragraph 2, and footnote on Table S 6.)
- 5. In sailing vessels where the number as per Rule is 75 and upwards, the reversed frames are to extend to the gunwale on every frame.
- 6. Double reversed angles to be fitted on every floor, extending from bilge to bilge in the engine and boiler spaces of steam vessels; and where the vessel is of 17 feet in depth or above from the hold beams, or where the number for plating is 15,000 or above, they are to extend sufficiently high to admit of the stringer at upper part of bilge being connected to them. Short double reversed angles are also to be fitted on all frames in way of the keelsons and stringers in hold, connected by not less than three rivets to the frame.

- 7. The butts of reversed angles, excepting those at middle line, to be secured with butt straps, having two rivets on each side of the butt.
- 8. The rivets for securing the reversed angles to the frames and floor-plates to be in diameter in proportion to the greatest thickness of angle, or plate, through which they pass, as specified in Table S 1, and to be spaced seven times their diameter, from centre to centre.
- 9. In vessels where the plating number is 20,000 and above, reversed angles should be fitted to every frame to the height of the upper, spar, or awning deck, abaft the after peak bulkhead; and in addition, where such vessels have broad flat counters, a double angle stringer should be fitted midway between the middle, and upper, spar, or awning deck beams for a reasonable length, connected by plate knees to the transom plate; or other additional strengthening applied, as the Surveyors may deem necessary.
- 10. In top-gallant forecastles of vessels whose plating number is 18,000 and above, the alternate reversed frames are to extend to the forecastle deck, or a double angle stringer of the size required for reversed frames is to be fitted inside the frames midway between the upper and forecastle decks, connected at the fore end by an efficient breasthook; or other equally efficient means of strengthening the forecastle may be adopted, if approved by the Committee.

MIDDLE LINE KEELSONS. MIDDLE LINE SINGLE PLATE KEELSON.

- Section 9. 1. The middle line keelson, if of single plate and standing above the floor-plates, to be of the size prescribed in Table S 3, and to have angles of the dimensions given in the same Table fitted and riveted on its upper and lower edges. In addition there is to be a rider plate on the top of the keelson-plate, extending over three-fourths of the length of the vessel amidships, riveted to the angle bars, the breadth of which is to be equal to the sum of the two broad flanges of the keelson angles together with the thickness of the centre plate it covers; the thickness of the rider-plate not to be less than prescribed in Table S 3. The butts of the plates and angles forming this keelson to be properly shifted, and to be efficiently butt-strapped.
- 2. The butts of the vertical plate to be secured with double butt-straps, each not less than $\frac{3}{20}$ of an inch thicker than half the thickness of the plates they connect, and to be treble riveted, or the plates may be lapped and treble riveted; the butt-straps of the rider-plate to be fitted on the upper side, and to be treble riveted; the butt-straps of the angle bars to be of sufficient length to have not less than three rivets in each flange properly arranged on each side of the butt.
- 3. Vessels in which the number for plating is 33,000 and above are to have a foundation-plate not less than 18 inches broad and $\frac{10}{20}$ of an inch thick fitted on the top of the floors, under the middle line plate keelson.

MIDDLE LINE INTERCOSTAL KEELSON.

4. If a middle line intercostal keelson be adopted, the plates are to be of the thickness prescribed in Table S 3, and riveted to vertical angles of not less size than the reversed frames, to be fitted and attached to all floor-plates; the intercostal plates to extend from the keel to the top of the floors, and to be fitted close to them. A bulb-plate, at least two inches deeper than required for the main deck beams, is to be let down below the top of the floors, between the reversed angles, sufficiently for the intercostal plates to be riveted thereto, and the bulb to be fitted between, and riveted to, two longitudinal angle

bars on the floors, extending all fore and aft, of the size given for keelson angles in Table S 3; or the letting down of the bulb plate may be dispensed with if the intercostal plates are extended to the upper edge of the longitudinal angles.

- 5. When intercostal keelsons are adopted with hanging keels, in vessels where the number for plating is 13,000, and under 18,000, instead of a bulb plate there is to be a centre vertical plate let down and attached to the intercostal plates below the top of floors, having double continuous angles at top and bottom, and a rider plate on its upper edge, of the sizes given in Table S 3; the vertical plate and the rider plate are to be of the thickness required for stringer plates in upper line of Table S 5, and the depth above the floors to be sufficient to admit of the angles being properly fitted. When the number is 18,000 and above, the vertical plate and the rider plate are to be of the thickness given in Table S 3 for main keelsons, and the depth of the vertical plate above the floors to be not less than three-fourths of that given in the said Table.
- 6. Where Flat plate keels are adopted, intercostal keelson plates attached to the floor plates, or centre through-plates, must be fitted close down on the keel, and connected to it by double angles of the dimensions given for keelson angles in Table S 3, riveted all fore and aft to the keel and keelson, the spacing of the rivets not to exceed 5 diameters apart. In vessels where the number for plating is 13,000 and under 15,000, or where the length exceeds ten times the depth, instead of a bulb plate, there is to be a centre vertical plate let down and attached to the intercostal plates below the top of floors, or connected to the centre through-plate, having double continuous angles, at top and bottom, and a rider plate on its upper edge; the vertical plate and the rider plate are to be not less in thickness than that given in the upper line of Table S 5 for stringer plates, and the depth above the floors to be sufficient to admit of the angles being properly fitted. Where the number is 15,000 and above, the vertical plate and the rider plate are to be of the thickness given in Table S 3 for main keelsons, and the depth of the vertical plate above the floors to be not less than three-fourths of that given in the said Table. Where the number is 26,000 and above, the flat-plate keel to be doubled for one half the vessel's length amidships.

CENTRE THROUGH-PLATE KEEL AND KEELSON.

7. If the middle line keelson be formed of a centre through-plate, extending from the lower edge of the keel to the top of the floors, it must be $\frac{2}{20}$ of an inch thicker than that required in Table S 3 for intercostal keelsons. To strengthen the floor-plates transversely at their intersection at the middle line, in addition to the double vertical angles riveted to their ends and to the centre plate keelson, there is to be a flat keelson-plate, of the same thickness as, and not less than three-fourths the breadth of, the garboard strakes in Table S 2, riveted to double reversed angles on the upper edge of floors, and to two fore and aft angle bars on the upper edge of the centre through-plate keelson; and where the number for plating is 15,000 and under 18,000, there is to be a bulb plate of the size of the main deck beams, fitted between, and riveted to, two longitudinal angle bars of the size for keelson angles in Table S 3, connected to flat plate keelsons and double reverse bars on top of floors. But, should the centre through-plate keelson be extended above the upper edge of the floors, then it is to be connected by two fore and aft angles of the size given in Table S 3, to two flat plates, one on each side of the middle-line

to be $\frac{2}{20}$ of an inch thicker than that given for intercostal plates, and one-third the breadth of the garboard strakes, to be well riveted to the double reversed angles on the upper edge of the floors. Where the number is 18,000 and above, the centre through-plate keelson is to extend sufficiently high above the floor-plates to take two pairs of double angles of the size given for keelson angles, and there is to be a rider plate fitted on the top, of the thickness of the keelson plate.

8. In all cases the middle line keelson is to be extended as far forward and aft as practicable.

BILGE KEELSONS, AND STRINGERS IN HOLD.

Section 10. 1. All vessels to have bilge keelsons, extending all fore and aft, and placed at the lower turn of the bilges, formed of double angles fitted back to back, of the size given in Table 8 3.

- 2. If the vessel has but a single tier of beams and her number in Table S 3 is under 7,200, a side stringer, formed of the same size angles, is to be fitted about midway between the bilges and upper deck, extending all fore and aft.
- 3. Where the number is 7,200 and above, and the vessel is under $15\frac{1}{2}$ feet depth to top of keel, two double angle stringers are to be fitted on each side between the bilge keelsons and the deck beams, extending all fore and aft, to be riveted back to back and to double reversed angles on the frames; the size of them not to be less than those used for the middle line keelson.
 - 4. For stringers in hold, see also Section 14.
- 5. In the cases of vessels intended to load or discharge while lying aground, it is recommended that the bottoms be additionally strengthened, in order to withstand the exceptional strains to which they may be subjected.

SIDE KEELSONS.

- Section 11. 1. In vessels where the number in Table S 3 is 13,000 and under 15,000, a double angle keelson is to be fitted on each side, as far forward and aft as practicable, and to be placed about midway between the middle line and bilge keelsons. Where there is no double bottom in the fore part of a steamer of full form, intercostal side keelsons to be fitted between the three-fifths length and the collision bulkead.
- 2. Where the number is 15,000, and upwards, intercostal plates are to be fitted on each side, as far forward and aft between the floors as practicable, and to be placed about midway between the middle line and bilge keelsons; these plates are to be fitted close to the floors, and to be attached to the outside plating with an angle of not less size than $3 \times 3 \times \frac{7}{20}$; if the plating number is 21,700 and under 30,400, these angle bars to be $3\frac{1}{2} \times 3\frac{1}{2} \times \frac{9}{20}$; and if of 30,400 and above, they are not to be less than $3\frac{1}{2} \times 3\frac{1}{2} \times \frac{10}{20}$, the intercostal plates are to extend to the top of the floors, and longitudinal plates, in long lengths of the same thickness as the intercostal plates, are to be let down and riveted to them. These plates are to be fitted between, and riveted to, two longitudinal angles of the size given for keelson angles; or the longitudinal plates may be dispensed with if the intercostal plates are extended to the upper edge of the longitudinal angles and riveted to them.
- 3. Side intercostal plates or side keelsons need not be fitted in the range of double bottoms; but where partial double bottoms are fitted, these keelsons are to extend into, or scarph the double bottom not less than three spaces of frames, and to be connected to the longitudinal girders where practicable.

4. Vessels not being of a size to require side intercostal keelson plates are to have washplates of the thickness given for bulkheads in Table S 1, fitted between the middle line and bilge keelsons for not less than half the vessel's length amidships.

DETAILS RELATING TO KEELSONS AND STRINGERS.

- Section 12. 1. Where bulb plate is used for keelsons or stringers, the joints are to be overlapped and riveted, or otherwise efficiently connected; if overlapped, the length of lap must not be less than twice the depth of the bulb plate; steel of other form than bulb may be used for them if of equal strength.
- 2. All angle bars for keelsons and stringers are to be in long lengths, properly shifted; and, wherever butted, to be connected with angle or plate, not less than two feet long, fitted in the throat of them, properly riveted to each flange. The thickness of the connecting plates not to be less than the thickness of the angle bars they connect.
- 3. In all cases the middle line, side, and bilge keelsons, and, where practicable, the stringers, are to be carried fore and aft continuously through the bulkheads, the latter being made watertight around them; and, where such parts of the ship are necessarily separated, the longitudinal strength is to be efficiently maintained, to the satisfaction of the Surveyors.
- 4. The spacing of the stringers at the ends of vessels, having either single or double bottoms should not exceed the spacing amidships.
- 5. All keelson and stringer angles may be reduced $\frac{1}{20}$ of an inch in thickness, when above $\frac{7}{20}$ of an inch amidships, for one-fifth the vessel's length at each end.
- 6. Where keelsons, or other longitudinal strengthening, are required for a certain portion of the length of a vessel care should be taken to lap or properly shift the same, so as to avoid any abrupt termination of strength.

BEAMS.

- Section 13. 1. The round up of the beams of all weather decks should not be less than one quarter of an inch per foot of length of beam. This round up of beam will be assumed in taking the measurement for regulating the scantlings, and arrangement of beams and stringers in hold.
- 2. The beams of the various decks, or of tiers of beams, are to be placed over each other and, as far as practicable, to be fitted to the frames which have reversed frames extended to the upper or spar deck.
- 3. Beams are to be of the form and size given in Tables S 4 and S 4A (see also Sketches pages 143 and 144), or they may be of other approved form of equal strength. The number of pillars to each beam is to correspond with the requirements of Table S 4. Where the length of the midship beams exceed 43ft. not less than two rows of pillars are to be fitted, and where the length exceeds 55ft. three rows are to be fitted. Where beams are at every frame, pillars are to be fitted at alternate beams and attached to continuous fore and aft girders under the beams. These girders are to be formed of double angles of the reversed frame size or other equivalent section, and they are to be attached to each beam and to all deep beams and bulkheads against which they abut, by short angles.
- 4. Where one row of pillars is fitted, the beams at the ends of the vessel which are less in length than two-thirds that of the beam amidships, may be of the sizes required by the columns numbered 2 in Table

S 4; and beams at ends less than half the length of the beam amidships may be of the sizes required by columns 3 in Table S 4. Where two rows of pillars are fitted amidships, the athwartship distance between the rows is to be about one-third the breadth of the vessel amidships; and the beams at the ends which are less than two-thirds the length of the beam amidships, may be supported by one row of pillars, and be of the sizes required by columns 2, and where the lengths of the beams at the ends are less than half the midship beam length the sizes may be as required by columns 3 if supported by one row of pillars. Where three rows of pillars are fitted amidships, the athwartship distances between the rows of pillars is to be about one-fourth the breadth of the vessel amidships, and the beams throughout are to be of the sizes required for beams amidships by columns 3; but where the lengths of the beams are less than three-fourths the length of the beam amidships, two rows of pillars may be fitted; and where the beams at the ends are less than half the midship beam length, one row of pillars may be fitted.

- 5. Where channel beams, bulb angle beams, or single angle beams are fitted to alternate frames the spacing of the rivets through the beams and the deck plating and stringers should not exceed five liameters centre to centre.
- 6. If beams of bulb angle section are fitted at alternate frames in vessels exceeding 34 feet in readth, a steel or iron deck should be fitted on these beams.
- 7. The beams at the ends of main or middle, upper and spar-deck hatchways, of from six to twelve frame spaces in length, are to be equal in size to those required at alternate frames for the main or middle deck; and the beams at the ends of hatchways of similar lengths in awning decks and bridge decks are to be of the size required for upper deck beams at alternate frames. Single angles fitted to hatchway end beams are to be equivalent in sectional area to the double angles required by Table S 4A. Half beams in way of hatchways or engine and boiler openings may be of the sizes required for beams with two rows of pillars, provided the half beams be efficiently pillared and attached to the coamings.
- 8. Upper deck beams in way of spaces in bridge-houses intended for carrying coal or cargo, are to be of the sizes required for main deck beams.
- 9. The beams of decks fitted exclusively for the accommodation of passengers, may be of the size given for upper deck beams of the same length.
- 10. In sailing ships the lower and orlop deck beams are to be one inch deeper than those required for the upper deck beams of the same length.
 - 11. Beams under a watertight flat must in all cases be fitted to every frame.
- 12. Strong beams in the machinery space of steamers are to have double angles on their upper and lower edges, unless cross tie plating is fitted on them, in which case only single angles need be fitted to the upper and lower edges of the beams.
- 13. Where plate knees are not fitted, beam knees are to be efficiently welded, and in sailing vessels they are to be "turned."
- 14. The depths of welded knees and the depths and breadths of bracket plate knees are to be not less than three times the depths required for the beams whether at every frame or at alternate frames, in the following cases, viz.:—
 - (a) The upper deck beam knees of steamers having one tier of beams only.

- (b) The middle deck beam knees of steamers having deep frames or web frames in lieu of a tier of beams.
- (c) Where beams are supported by three rows of pillars and are of the sizes required by the Tables.
 - (d) The upper deck beam knees in way of omitted middle deck half beams.
 - (e) The beam knees at watertight flats for deep tanks, including peak tanks.
 - (t) The upper, lower, and orlop deck beam knees of sailing vessels.
- 15. Where two rows of pillars are fitted and the beams are of the corresponding sizes required by the Tables, the beam knees are to be two and three quarter times the depth of the beams. The depths of all other beam knees are not to be less than two and a half times the depths required for the beams whether fitted to alternate frames or to every frame.
- 16. Beam knees are to measure across the throats not less than six-tenths of the depths required for the knees.
- 17. Not more than two holes are to be punched in each beam knee before the beam is properly adjusted in its position.
- 18. The number and size of the rivets in the beam knees, or in both arms of bracket plate knees, are to be in accordance with the following table:—

DEPTH OF KNEE.					Number of rivets.	Diameter of rivets.	
		Unde	r 17	inches.	4	$\frac{3}{4}$ of	an inch.
17	and	under	21	"	5	$\frac{3}{4}$,,
21	"	,,	24	,,	5	7 8	"
24	27	"	28	. ,,	6	7 8	,,
28	"	. ,,	32	"	7	7/8	,))
32	. ,,	"	3.6	,,	8	7 8	"
36	"	, ,,	40	,,	9	78	,,

SPACING OF BEAMS AND STRINGERS IN HOLD.

- Section 14. 1. The spacing of beams is to be regulated by the depth amidships, measured from the top of keel to the top of the upper, spar, or awning-deck beams as described in Section 1, paragraph 8, excepting in awning-decked vessels of less than $17\frac{1}{2}$ feet depth to the main deck, in which case the arrangement of stringers in hold, &c., is to be regulated by the depth to the main deck. (See also Section 10, paragraphs 2 and 3.)
- 2. All upper deck beams and the middle deck beams of three-decked ships, and the main deck beams of spar and awning-decked ships, to be fastened to alternate frames, except where steel decks are fitted as provided for in Table S 4.

- 3. All Vessels under 13 feet in depth are to have a double angle stringer extending all fore and aft about midway between bilge keelson and deck beams, riveted back to back and to double reversed angles on the frames.
- 4. All Vessels of 13 and under 14 feet in depth to have, in addition to the foregoing, bulb plate of the size required for the deck beams, riveted between the continuous double angle stringer for three-fifths the vessel's length amidships; or the bulb may be dispensed with, provided that, in lieu thereof, intercostal plates in long lengths be fitted between the double angle stringer, and attached by single angle bars to the outside plating.
- 5. All Vessels of 14 and under $15\frac{1}{2}$ feet in depth to have, instead of the bulb plate, as described above, a plate not less than 12 inches wide and $\frac{7}{20}$ of an inch thick, connected to the outside plating, with double angles fitted on the inner edge of the size of the keelson angles, extending all fore and aft.
- 6. All Vessels of $15\frac{1}{2}$ feet depth and above to have a double angle stringer of the size given in Table S 3, extending all fore and aft at the upper turn of the bilge on each side.
- 7. All Vessels of $15\frac{1}{2}$ and under $16\frac{1}{2}$ feet in depth to have hold beams of extra strength, as given in Table S 4, fastened to every tenth frame, with a stringer plate of the size given in Table S 5 for hold beam stringers, attached to the plating and supported by brackets at every alternate frame between the beams, and secured to the beams by efficient gusset plates.
- 8. All Vessels of $16\frac{1}{2}$ and under $17\frac{1}{2}$ feet in depth to have hold beams of extra strength, as given in Table S 4, fastened to every tenth frame, with a stringer plate on them attached to the side plating of the size given in Table S 5, and to have at each beam end an efficient gusset plate riveted to the beam and stringer plate. On the inner edge of the stringer plate, between the beams, an angle bar is to be fitted, of the size given for keelson angles in Table S 3, with its deep flange vertical, and covering the ends of the bracket plates.
 - 9. All Vessels of $17\frac{1}{2}$ and under $18\frac{1}{2}$ feet in depth to have lower deck beams fastened to every second and fourth frame alternately, or they may have hold beams of extra strength, as given in Table S 4, fastened to every tenth frame, with an angle bar on the inner edge of the stringer plate, and gusset plates at the beam ends, as in the preceding case.
- 10. All Vessels of $18\frac{1}{2}$ and under $19\frac{1}{2}$ feet in depth to have lower deck beams fastened to every second and fourth frame alternately; or they may have hold beams as described in the foregoing paragraph, fastened to every tenth frame, provided double angle bars $3\frac{1}{2} \times 3\frac{1}{2} \times \frac{7}{20}$, be fitted on the inner edge of the stringer plates with a face plate $\frac{7}{20}$ of an inch in thickness, and gusset plates at the beam ends.

SAILING VESSELS.

- 11. Sailing Vessels of $19\frac{1}{2}$ and under 23 feet in depth to have lower deck beams fitted to every alternate frame.
- 12. Sailing Vessels of 23 and under 24 feet in depth from the upper part of the upper deck beams, or of 16 and under 17 feet from the upper part of the lower deck beams to the top of the keel, to have the lower deck beams fitted to every alternate frame, and to have two double angle stringers extending fore and aft, between the bilge keelson and lower deck beams, on each side.

- 13. Sailing Vessels of 24 and under 26 feet in depth from the upper part of the upper deck beams, or 17 and under 18 feet from top of lower deck beams, to have the lower deck beams fitted to every alternate frame, and to have in addition to the above, bulb plates of the size of the lower deck beams with one row of pillars fitted and riveted between each of the two side stringers in lower hold on both sides, to extend all fore and aft.
- 14. Sailing Vessels of 26 and under 27 feet in depth, from the upper part of the upper deck beams, or 18 and under 19 feet in depth, from top of lower deck beams, to have, in addition to the foregoing, intercostal plates of the thickness given in Table S 3, attached to the outside plating, and fitted to the upper stringer, all fore and aft, and to the lower stringer from one-fourth of the vessel's length aft, until it is incorporated with the panting stringer.
- 15. SAILING VESSELS of 27 and under $28\frac{1}{2}$ feet in depth from upper deck, or of 19 and under $20\frac{1}{2}$ feet in depth from top of lower deck beams, are to have the lower deck beams fitted to every alternate frame, and to have orlop stringer plates of the dimensions required for hold beam stringer plates in Table S 5 fitted and attached to the outside plating and reversed frames by angle bars of the size given in Table S 3; these stringers to be supported by bracket-plates riveted to them, and to alternate frames; and upon the inner edge of the stringer-plate an angle bar of the size of keelson angles, as per Table S 3, is to be fitted and riveted, so that its vertical flange may cover the ends of the bracket plates. Or, if preferred, an additional side stringer to those required in the preceding paragraph may be fitted, formed of double angles, bulb, and intercostal plates attached to the outside plating and fitted all fore and aft.
- 16. Sailing Vessels of $28\frac{1}{2}$ and under $29\frac{1}{2}$ feet in depth from the upper deck, or of $20\frac{1}{2}$ and under $21\frac{1}{2}$ feet from the top of lower deck beams, to have the lower deck beams fitted to every alternate frame, and to have orlop beams of the size given in Table S 4 for "hold beams of extra strength" fitted to every tenth frame, with an angle bar on the inner edge of the stringer plate, as in the preceding paragraph; or these beams may be twelve frame spaces apart, provided double angles $4 \times 3\frac{1}{2} \times \frac{7}{20}$, be fitted on the inner edge of the stringer plate with their deep flange vertical, and with a face plate $\frac{8}{20}$ of an inch in thickness. These beams are to be secured to the stringer plate by efficient gusset plates.
- 17. Sailing Vessels, when the Plating Number is 24,000 and under 27,000, are to have a bulb plate of the size required by Table S 4 for the lower deck beams with one row of pillars fitted to the side keelson for two-thirds the length of the vessel amidships, and intercostal plates are to be fitted to the bilge keelson for half the vessel's length amidships. When the Plating Number is 27,000 and under 30,000, a vertical plate is to be fitted to the side keelson for two-thirds the vessel's length amidships, the plate to be one-half the depth, and the same thickness as that required for the middle line keelson, with double angles and a rider plate on the upper edge. The double angles to be of the size required for upper deck stringer angles, and the rider plate to be of the same thickness as the vertical plate. In addition to this, intercostal plates are to be fitted to the bilge keelson for half-length amidships, with a bulb plate of the size required for lower deck beams for three-fifths the length of the vessel amidships. When the Plating Number is 30,000 and under 33,000, a vertical plate is to be fitted to the side keelson for two-thirds the vessel's length amidships, the plate to be three-fourths the depth of and the same thickness as that required for the middle line keelson, with double angles and a rider plate fitted on the upper edge. The double angles to be of the size required for upper deck stringer angles, and the rider plate to be of the same thickness as

the vertical plate. In addition to this, intercostal plates are to be fitted to the bilge keelson for twothirds the length amidships, with a bulb plate of the size required for lower deck beams with one row of pillars for three-fifths the length.

STEAM VESSELS.

- 18. Steam Vessels of $19\frac{1}{2}$ and under 22 feet in depth to have lower deck beams fastened to every alternate frame; or hold beams of extra strength, as given in Table S 4, may be fitted to every eighth frame, provided an angle bar, of the size given for keelson angles in Table S 3, be fitted on the inner edge of the stringer plate, and to have at each beam end an efficient gusset plate riveted to the beam and stringer plate; or these beams may be spaced wider, not exceeding ten frame spaces, provided double angle bars $3\frac{1}{2} \times 3\frac{1}{2} \times \frac{7}{20}$, and a face plate, $\frac{8}{20}$ of an inch in thickness, be fitted on the inner edge of the stringer plate, with gusset plates as above.
- 19. Steam Vessels of 22 and under 23 feet in depth to have, in addition to the foregoing, an extra side stringer, formed of double angles of the size of the keelson angles, fitted between the hold beams and bilge stringer, extending as far forward and aft as practicable.
- 20. Steam Vessels of 23 and under 24 feet in depth to have, in addition to the above, a bulb plate of the size required for lower deck beams, with one row of pillars fitted between the double angles of each of the side stringers, all fore and aft.
- 21. Steam Vessels of 24 and under 26 feet in depth from the upper part of the upper deck beams, or of 17 and under 18 feet from the upper part of the lower deck beams to the top of the keel, to have the lower deck beams fitted to every alternate frame, and to have hold beams of extra strength, as given in Table S 4, fastened to every tenth frame, with a stringer plate on them attached to the side plating of the size given in Table S 5 for hold beam stringer plates; and to have at each beam end an efficient gusset plate riveted to the beam and stringer plate; and on the inner edge of the stringer plate, between the beams, an angle bar is to be fitted, of the size given for keelson angles in Table S 3, with its deep flange vertical, and covering the ends of the bracket plates.
- 22. Steam Vessels of 26 and under 27 feet in depth from the upper deck, or 18 and under 19 feet from top of the middle deck beams, to have lower deck beams fastened to every second and fourth frame alternately. Or they may have hold beams of extra strength, as given in Table S 4, fastened to every eighth frame, and to have an angle bar on the inner edge of the stringer plate, and gusset plates at the beam ends, as in the preceding case; or they may be spaced wider, not exceeding ten frame spaces, provided double angles $3\frac{1}{2} \times 3\frac{1}{2} \times \frac{7}{20}$ be fitted on the inner edge of the stringer plate, with a face plate on them $\frac{8}{20}$ of an inch in thickness.
- 23. Steam Vessels of 27 and under 28 feet in depth from the upper deck, or 19 and under 20 feet from the top of the middle deck beams, to have lower deck beams fastened to every second and fourth frame alternately. Or they may have hold beams of extra strength as given in Table S 4, fastened to every eighth frame, and to have an angle bar on the inner edge of the stringer plate, and gusset plates at the beam ends, as in the preceding case; or these beams may be ten frame spaces apart, provided double angles $4 \times 3\frac{1}{2} \times \frac{7}{20}$ be fitted on the inner edge of stringer plate with their deep flange vertical and with a face plate $\frac{8}{20}$ of an inch in thickness.
- 24. Steam Vessels of 28 and under 30 feet in depth from the upper deck, or 20 feet and under 22 feet from the top of the middle deck beams, to have lower deck beams fastened to every alternate

frame. Or if hold beams of extra strength, as given in Table S 4, be fitted, they may be fastened to every eighth frame, provided an angle bar of the size given for keelson angles in Table S 3, be fitted on the inner edge of the stringer plate and gusset plates be fitted as in the previous case; or these beams may be spaced wider, not exceeding ten frame spaces, provided double angles, $4 \times 4 \times \frac{8}{20}$, and a face plate $\frac{9}{20}$ of an inch in thickness be fitted on the inner edge of the stringer plate, with gusset plates at the beam ends.

25. STEAM VESSELS of 30 and under $32\frac{1}{2}$ feet in depth from the upper deck, or 22 and under $24\frac{1}{2}$ feet from the top of the middle deck beams, to have lower deck beams fastened to every alternate frame. Or if hold beams of extra strength, as given in Table S 4, be fitted, they may be fastened to every eighth frame, provided an angle bar of the size given for keelson angles in Table S 3, be fitted on the inner edge of the stringer plate, and gusset plates be fitted as in the previous case; or these beams may be spaced wider, not exceeding ten frame spaces, provided double angles $4 \times 4 \times \frac{8}{20}$, and a face plate $\frac{9}{20}$ of an inch in thickness, be fitted on the inner edge of the stringer plate, with gusset plates at the beam ends. In either case, in addition, a double angle stringer, of the size given for keelson angles in Table S 3, with bulb plate between, is to be fitted midway between the bilge stringer and the hold beams.

26. Steam Vessels of $32\frac{1}{2}$ and under 36 feet in depth from the top of the upper deck beams to the top of keel, or in which the depth from the top of the lower deck beams is $17\frac{1}{2}$ and under 21 feet, to have the lower deck beams fitted to every alternate frame, and to have below them an orlop stringer plate attached to the outside plating and reverse frames, of the thickness, and three-fourths of the breadth, of the lower deck stringer plates, supported by bracket plates riveted to them and to alternate frames; and upon the inner edge of the stringer plate an angle bar, of the size of keelson angles, as per Table S 3, is to be fitted and riveted, so that its vertical flange may cover the ends of the bracket plates; or a stringer of other form may be fitted, if approved by the Committee.

27. STEAM VESSELS of 36 and under 39 feet in depth from the top of the upper deck beams to the top of keel, or in which the depth from the top of the lower deck beams is 21 feet or above, are to have the lower deck beams fitted to every alternate frame, and to have orlop beams, of the size given in Table S 4 for "hold beams of extra strength," fitted to every tenth frame, with stringer plates on them, and gusset plates at their ends. The stringer plates to have angle bars on their inner edge, as in preceding paragraph.

28. Gusset plates to be fitted to hold beam stringer plates at all bulkheads where strong hold beams are fitted.

29. Plans of all vessels above 39 feet in depth must be submitted for the consideration of the Committee, with a view to additional strength being provided. And in all vessels where the height between deck stringers at the sides is 8 feet or above, at any part, additional transverse strength at such part must be submitted for approval.

30. When the beams exceed two spaces of frames apart, a knee or bracket plate is to be riveted to alternate frames and to the stringer plate of the thickness required for the frames amidships.

31. Notwithstanding the foregoing arrangements for the spacing of beams, whenever a deck is laid, the beams are not to be further apart than two frame spaces.

32. Where it is necessary, in consequence of long hatchways, engine-rooms, boiler spaces, &c., to dispense with some of the hold or lower deck beams, compensation must be made by fitting hold beams of

extra strength, as given in Table S 4, with gusset plates, and angle bars, &c., on the stringer plates, or extra web frames to the satisfaction of the Committee.

- 33. If an arrangement differing from the foregoing in the spacing of the hold beams, to suit convenience of stowage, be required, a sketch showing beams and stringers of extra strength, web frames, or deep framing, with all particulars, must be submitted through the resident Surveyors, who are to state their opinion thereon, for the Committee's consideration.
- 34. In way of raised quarter decks, where the depth from the top of the keel to the top of the raised quarter deck beam is 24 feet, or above, and the lower deck hatchways are not framed, a web frame is to be fitted abreast of the hatchway, extending from the floors to the upper deck. Where web frames are fitted in lieu of strong hold beams and the lower deck hatchways are not framed, the web frames in way of the hatchways are to be spaced as required by Section 14a, and extended to the upper deck.

WEB FRAMES IN LIEU OF HOLD BEAMS. (See also Sketches, pages 134 to 137.)

Section 14a. 1. Web frames in conjunction with side stringers in hold will be admitted in lieu of wide spaced hold beams and stringers, if arranged in accordance with the conditions specified below:—

The depth of the vessel for regulating the spacing and depth of web frames, and the number of side stringers required to be fitted, is to be taken from the top of the keel to the top of the first complete tier of beams (other than wide spaced beams), assuming the beams to have the normal round up of one quarter of an inch to the foot of length of beams.

- 2. When web frames and side stringers are fitted in lieu of hold beams, the web frames and stringers to be of the thickness required for the frames.
- 3. Double angles are to be riveted on the inner edge of the web frames and stringers; these angles and those connecting the stringers to the web frames and outside plating, also the angles connecting the stringers to the reversed frames, between the web frames, are to be of the same size as the reversed frames. Single angles of equivalent strength may be substituted for the double angles described above provided double angles be fitted in way of the diamond plates described in next paragraph. The web frames to be attached to the margin plate of double bottom by double angles, or to the inner bottom by efficient gusset plates.
- 4. An efficient diamond plate of the thickness of the web frames is to be fitted at the junction of the web frames and stringers, and to be not less than 24 inches \times 18 inches for web frames 14 inches deep; 30 inches \times 21 inches for web frames 15 inches deep; and 30 inches \times 24 inches when the depth of the web frames exceeds 15 inches.
- 5. The through beams attached to the head of web frames are to be in all cases of the depth required for "beams of extra strength," excepting where an iron or steel deck is fitted on these beams in which case they may be of the ordinary rule size of beams to alternate frames.
- bracket knee plates. When web frames are fitted in way of half beams they are to be connected at the head by large
- 7. The side stringers are to be supported by a bracket knee plate of the thickness required for frames midway between the web frames, when 18 inches in width, except when the web frames are spaced 8 feet apart, when the bracket plates will not be required.
 - 8. On those frames where web frames are not fitted the reversed frames are to extend to the upper

deck and the stringer plate next below alternately, except in three-deck and spar-decked vessels where web frames are fitted below the middle deck, in which case the reversed frames are to extend as specified in Section 41, paragraph 5, and Section 42, paragraph 6 respectively.

- 9. Vessels of under 16 feet in depth from top of keel, requiring hold beams, to have web frames 14 inches in depth, eight frame spaces apart, with one side stringer plate above the bilge stringer, fitted intercostally between the web frames, and connected to them by angles and diamond plates as previously described.
- 10. Vessels of 16 feet and under 17 feet in depth, to have web frames 15 inches deep, not more than eight frame spaces apart, with one side stringer plate above the bilge stringer as described in preceding paragraph.
- 11. Vessels of 17 feet and under 18 feet in depth, to have web frames 15 inches deep not more than eight frame spaces apart with two side stringers, in which case the double angle bilge stringer may be omitted (except in vessels other than Awning deck requiring three tiers of beams, and under 18 feet to the middle or lower deck, when the web frames should be not more than six frame spaces apart).
- 12. Vessels of 18 feet and under $21\frac{1}{2}$ feet in depth, to have web frames 15 inches deep, not more than six frame spaces apart with two side stringers. When of this depth to the middle deck, the web frames are to be 18 inches deep, except in the case of Awning deck vessels where the web frames may be 16 inches deep.
- 13. Vessels of $21\frac{1}{2}$ feet and under $22\frac{1}{2}$ feet in depth, to have web frames 15 inches deep, not more than six frame spaces apart with three side stringers, or web frames with two side stringers 18 inches deep may be substituted, in vessels fitted with a double bottom, provided the brackets outside the margin plate be extended up the bilges to a height of three times the depth of the ordinary rule floor at the middle line. When of this depth to the middle deck, the web frames to be 18 inches deep, with three side stringers, except in the case of Awning deck vessels where the web frames may be 16 inches deep.
- 14. Vessels of $22\frac{1}{2}$ feet and under $23\frac{1}{2}$ feet in depth, to have web frames 16 inches deep, not more than six frame spaces apart with three side stringers. When of this depth to the middle deck, the web frames to be 18 inches deep, except in the case of Awning deck vessels where the web frames may be 16 inches deep.
- 15. Vessels of $23\frac{1}{2}$ feet and under 24 feet in depth, to have web frames 18 inches deep, spaced not more than six frame spaces apart, with three side stringers, as in the preceding paragraph.

Web frames in way of RAISED QUARTER-DECKS, in lieu of lower deck beams and beams of extra strength wide spaced in lower hold.

- 16. Vessels of 24 feet and under 25 feet to the quarter-deck, to have web frames 16 inches deep, five frame spaces apart with three side stringers; and not less than four beams of extra strength, formed of plate and four angles as prescribed in Table S 4 are to be fitted and efficiently connected to one of the side stringers, and to the web frames by large gusset plates and vertical bracket plates, of the thickness of the side stringers. In addition, a water-tight transverse bulkhead to be fitted about midway between the after engine-room bulkhead and the after end of the vessel.
- 17. Vessels of 25 feet and under 26 feet, to have web frames 16 inches deep, from four to five frame spaces apart, with three side stringers, and not less than four beams of extra strength, and an additional water-tight bulkhead as in preceding paragraph.

- 18. Vessels of 26 feet and under 27 feet, to have web frames 18 inches deep, four frames spaces apart, with three side stringers and not less than four strong beams, and an additional bulkhead as above.
- 19. Vessels of 27 feet and under 28 feet, to have web frames 18 inches deep, four frame spaces apart, with four side stringers, and not less than four strong beams, and an additional bulkhead as previously described.
- 20. In all cases where web frames are fitted in lieu of lower deck and hold beams, as set forth in the foregoing paragraphs, the bulkheads are to be additionally stiffened by a centre vertical web and semi-box beam so as to compensate in an efficient manner for the omission of the support which would be afforded by these decks in case such were fitted.

DEEP FRAMING IN LIEU OF HOLD BEAMS OR WEB FRAMES. (See also Sketches, pages 138 and 139.)

- Section 14b. 1. Where deep framing is adopted in steam vessels, in lieu of a tier of wide spaced hold beams, the depth of the framing should be as required by Table S 1, in vessels having double bottoms, in which the bracket knee plates outside the margin plate are extended up the bilge to a height of not less than two and a half times the depth of the midship ordinary floor. In vessels without double bottoms, the depth of the framing should be increased by one half inch.
- 2. The angles forming the deep framing to be connected by a single riveted lap, not less than 3 inches in width, and the thickness of the angles and width of the fore and aft flanges should not be less than given in the table for main frames.
- 3. The inner angles forming reverse frames should extend to the upper deck in two deck vessels, and in other vessels as required by Section 8, provided the height between decks does not exceed 8 feet.
- 4. The number of side stringers to be regulated by the depth at the middle line to the top of the lowest laid deck; where this depth is under 17 feet, one side stringer and the usual double angle bilge stringer are to be fitted; where the depth is under $21\frac{1}{2}$ feet, two side stringers are to be fitted; and where the depth is $21\frac{1}{2}$ feet and under 24 feet, three side stringers are to be fitted. The width of the side stringers to be as given in Table S 1, and the thickness to be not less than that of the main frames. The stringers are to extend to, and be connected to the outside

plating, and to have double angles of the size given in the table on their inner edges

of rivets on each side of the bulkheads.

and double angles inside the reverse frames. (See sketch). Other forms of stringers of equivalent strength may be adopted, provided they are first submitted to the

- Committee for approval. The continuity of the side stringers is to be maintained at the watertight bulkheads, either by making the plates and angles continuous and fitting bracket plates, or by stopping them and fitting large bracket plates one-twentieth of an inch thicker than the stringer plates, and twice their depth inside the face angles. These brackets should be attached to the bulkheads by double angle collars, and be attached to the side stringers by a double row
- 5. Where this system of framing is adopted, the beam knees of the lower tier should be three times the depth of the beams. Where the deep framing is extended through the engine and boiler space, the web frames required may be spaced about ten frame spaces apart.

- 6. In the case of Three deck and Spar deck vessels, these Rules are framed for vessels in which the height between decks is from 7 to 8 feet; where these limits are departed from, the cases will be specially considered by the Committee.
- 7. When deep framing is adopted under Raised Quarter decks, the depth of the framing, width of stringers, and size of angles is to be regulated by the frame number obtained by adding the height of the raised quarter deck to the frame number of the vessel to main deck, and the number of stringers to be regulated by the depth at middle line from top of keel to top of raised quarter deck. Strong beams and additional watertight bulkheads to be fitted, as required by Section 14a, when web frames are adopted.
- 8. When deep framing is adopted in vessels over $32\frac{1}{2}$ feet from top of keel to top of upper deck beams, plans are to be specially submitted for the consideration of the Committee.

PILLARS.

- Section 15. 1. Pillars are to be of malleable steel or iron of the sizes given in Tables S 1A and S 1B, or they may be of other approved form of equal strength. The number of pillars to each beam is to correspond with the requirements of Table S 4, and Section 13, paragraph 4. Where the length of the midship beam exceeds 43 feet, not less than two rows of pillars are to be fitted, and where the length exceeds 55 feet three rows are to be fitted. Where beams are at every frame, pillars are to be fitted at alternate beams and attached to continuous fore and aft girders under the beams. These girders are to be formed of double angles of the reversed frame size or other equivalent section, and they are to be attached to each beam, and to all deep beams and bulkheads against which they abut, by short angles.
- 2. Pillars to beams are to be arranged between decks and in the holds so as to form continuous ties from the floors to the weather deck beams. The heads of pillars are to be fitted close under the beams or girders, and the heels are also to be fitted close. Where the lengths of pillars are 10 feet and under 18 feet, or the diameters are $2\frac{5}{8}$ inches and under 4 inches, the ends are to be attached by not less than two $\frac{7}{8}$ inch rivets. Where the lengths are 18 feet and under 24 feet, or the diameters are 4 inches and over, there are to be not less than two 1 inch rivets in each end of the pillars. Where the lengths exceed 24 feet, there are not to be less than three 1 inch rivets in each end.
 - 3. The heels of pillars at inner bottoms are to be fitted and riveted to short tee or angle bars.
- 4. Where beams are fitted of the scantlings required with two or three complete rows of pillars, the row of pillars on each side is to be continued in way of all deck openings.
- 5. Pillars under wide spaced hold beams may be of the sizes required for pillars of the same length under the deck next above the hold beams.
- 6. If a middle or main deck is intended exclusively for passengers the pillars between this deck and the floors may be \(\frac{1}{4}\) inch less in diameter than is required by Tables S 1A and S 1B, and where the lower deck is also intended for passengers exclusively the pillars between this deck and the floors may be \(\frac{1}{2}\) inch less in diameter than is required by the Tables.
- 7. Where beams are fitted to every frame of the sizes required with two rows of pillars, the pillars in way of the hatchways may be spaced four frame spaces apart, provided the diameters of these pillars be increased $\frac{1}{2}$ of an inch and intercostal plates $\frac{9}{20}$ of an inch in thickness be riveted to the girders

under the beams and be attached to the deck plating by angles $3\frac{1}{2} \times 3\frac{1}{2} \times \frac{9}{20}$ fitted between the beams, extending from one frame space before to one frame space abaft such hatchways.

- 8. A row of pillars fitted at the middle line to every alternate frame in conjunction with two rows of pillars fitted to every fourth frame at the quarter breadth of the vessel may be taken as equivalent to two complete rows of pillars, provided beams are fitted to every frame, and intercostal plates $\frac{9}{20}$ of an inch in thickness be riveted to the girders at the heads of the quarter pillars, and be attached to the deck plating by angles $3\frac{1}{2} \times 3\frac{1}{2} \times \frac{9}{20}$ fitted between the beams, but in way of hatchways the quarter pillars are to be increased $\frac{1}{2}$ of an inch in diameter.
- 9. A complete row of quarter pillars attached to an intercostal girder should be fitted on each side of the middle line bulkhead in deep tanks.
- 10. The pillars to the coamings of hatchways in vessels where only a centre row of pillars is fitted are not to exceed four frame spaces apart on each side, and hatchways 26 feet in length and above are to be pillared at the corners in addition. Under deck houses, heel of bowsprit, windlass, steam winches and capstans, the beams are to be additionally pillared.
- 11. Where double pillars are fitted for the purpose of securing shifting boards, they are not to be less than three-fourths the diameter required for single pillars.
- 12. If pillars be fitted on a shaft tunnel, the tunnel should be strengthened in way of them, by doubling plates, angle bars, and a transverse vertical plate, or by other efficient means.
- 13. Where a middle line bulkhead is fitted in lieu of pillars, its thickness is not to be less than $\frac{5}{16}$ of an inch, and it is to be connected at the bottom and to plating on the beams by double angles not less than $3 \times 3 \times \frac{7}{16}$, and to be stiffened vertically by double angles of the size required by Table S 1 for the frames, or by tee bars of equivalent section, spaced two frame spaces apart; the stiffeners on one side of the bulkhead should be attached to the beams. The stiffeners in the 'tween decks may be of double angles of the size required for the reversed frames and be spaced two frame spaces apart.
- 14. The beams in the machinery space are to be pillared where practicable. Quarter pillars at this part may be dispensed with provided the beams are supported by straight bunker sides or casings of not less than $\frac{5}{16}$ of an inch thick, stiffened as required for middle line bulkheads.

STRINGERS ON BEAMS.

- Section 16. 1. All vessels to have stringer plates upon the ends of each tier of beams. Those upon the ends of the upper deck beams of one and two deck vessels, the upper and middle deck beams of three deck vessels, and upon the main deck beams of spar and awning-decked vessels, to be of the breadth and thickness given for main stringer plates in Table S 5, for half the vessel's length amidships; from thence to the ends of the vessels they may be gradually reduced to the dimensions given for the ends of main stringer plates in Table S 5.
- 2. The stringer plates on ends of the beams next below the upper deck in two deck vessels, and below the middle deck in three deck vessels, and below the main deck in spar or awning-decked vessels, to be of the breadth and thickness given for hold beam and lower deck stringers in Table S 5.
- 3. The stringer plates on the ends of spar-deck beams are to be the breadth of, and may be 1/20 of an inch less in thickness than, the stringer plates given on the upper line of Table S 5 for

vessels of the same plating number, and may be reduced at their ends $\frac{1}{20}$ of an inch in thickness, and to the breadth given for the ends of main deck stringer plates in Table S 5.

- 4. The stringer plates on the ends of awning-deck beams to be as per Section 43, par. 9.
- 5. The stringer plates on all tiers of beams are to be fitted home and riveted to the outside plating, all fore and aft, with angle bars of the dimensions required by Table S 3; the middle, lower, and orlop deck stringer plates to have an additional angle bar of the same dimensions extending all fore and aft riveted to the reversed frames and to the stringer plates. (For riveting of butts see Section 20.)
- 6. In cases where no deck is laid, and the width of the stringer plate on the ends of the hold beams is objected to, it may be reduced, provided such reduction be fully compensated for and receive the sanction of the Committee.
- 7. When the frames are extended through the upper deck stringer plate to form frames for bridge-houses, or poops and forecastles, there must be a continuous angle bar, of the size given for lower deck stringer angles, wrought on the upper deck stringer plate inside the frames.
- 8. The main and hold beam stringer plates may be reduced at the ends of the vessel to the sizes given for the same in Table S 5.
 - 9. The upper deck stringer angle bar is in all cases to be fitted on the upper side of the stringer plate.
- 10. When gutter waterways are fitted to upper decks in vessels having poops or forecastles, the angle bars forming the ends of the gutters are to be welded, and the gutters to be carefully caulked.

TIE-PLATES ON BEAMS.

- Section 17. 1. All vessels to have tie-plates ranging all fore and aft upon each side of the hatchways on each tier of beams, these plates to be lapped or butted, and at least double riveted. Upon hold beams, or lower deck beams spaced two to four frame spaces apart, on which no deck is to be laid, or where tie-plates would interfere with stowage of cargo, double angle bars of the dimensions given in Table S 3 for angle bars on lower deck beam stringer plates, placed at middle line or at each side of the hatchways, extending fore and aft wherever practicable, and well riveted to all beams and stringers, will be admitted in lieu thereof.
- 2. Diagonal tie plates are to be fitted on the beams of all sailing vessels in way of the masts at the deck on which they are wedged; and in addition, where the plating number is 15,000 and above diagonal tie-plates are to be fitted all fore and aft on the upper deck.
- 3. Where diagonal tie-plates cross each other, or the fore and aft tie-plates, between the beams, and a deck is to be laid thereon, one set of tie-plates must be set down in way of the crossing, so as to leave one thickness only projecting above the beams.
- 4. The tie-plates to be of the width and thickness given in Table S 5, for half the vessel's length amidships, tapered at the ends to the same thickness as the ends of the stringer plates. They are to be well riveted to each other and to the beams and stringers; and all butts to be properly shifted.

HOOKS AND CRUTCHES AND PANTING ARRANGEMENTS.

Section 18. 1. All stringers, where practicable, to extend fore and aft, and to be efficiently connected at their ends with plates forming hooks and crutches of the same thickness as the floor-plates amidships, and those below the hold beams should be spaced about 4 feet apart. In vessels whose

plating number is 24,000, or above, an additional hook or crutch should be fitted at the ends of the vessel, between each tier of beams, to the satisfaction of the Surveyors.

- 2. The depth for regulating the number of tiers of beams to alternate frames in the fore peak to be taken at the collision bulkhead, and the beams fitted in accordance with Section 14 for this depth. All vessels to have, in addition, provision made to prevent panting by extra beams, bracket knees and stringer plates being fitted before and abaft the collision bulkhead. Panting beams and stringers to be fitted at the after end where considered necessary by the Surveyors.
- 3. Sailing vessels under 20 feet in depth at the collision bulkhead, to have lower deck or panting beams fitted to alternate frames in the peak, with a stringer plate two-thirds the breadth of the lower deck stringer plate amidships. Vessels 20 feet and under $30\frac{1}{2}$ feet in depth to have in addition to the lower deck beams, a tier of panting beams with a stringer plate two-thirds the breadth of the lower deck stringer plate amidships. Vessels $30\frac{1}{2}$ feet and under 33 feet in depth to have two tiers of panting beams below the lower deck with stringer plates on their ends.
- 4. The stringer plates on the panting beams to be attached to the outside plating when fitted in continuation of intercostal stringers. These plates are to extend abaft the collision bulkhead for a length of not less than one-fourth the midship breadth of the vessel, and be efficiently supported by brackets at alternate frames. Panting beams and stringers to be fitted at the after end where considered necessary by the Surveyors.
- 5. Plans of proposed panting arrangements in vessels of 33 feet in depth and above to be submitted for the consideration of the Committee.

PLATING.*

- Section 19. 1. The thickness of the outside plating as given in Table S 2, for half the vessel's length amidships, is to be maintained for that length, but it may thence be gradually reduced to the thickness given for the extreme ends, by gradations of $\frac{1}{20}$ of an inch over equal parts before and abaft the half-length amidships. In a steamer having a tonnage co-efficient of '78, or having a full form at the fore part, the two strakes of outside plating next the garboards to have the midship thicknesses maintained forward to the collision bulkhead. In all screw steamers the garboard plates connected to the stern frame, and where the plating number is 16,600 or above, also the after lengths of plating so connected, must be of the thickness required for the same strakes amidships. In sailing vessels, the outside or overlapping strakes of plating for one-quarter of the vessel's length at her fore end should only be reduced $\frac{1}{20}$ of an inch from the midship thickness; and where the plating number is 16,000 or above, three strakes of plating at the bilges are to be increased $\frac{1}{20}$ of an inch in thickness throughout, and when the plating number is 22,000 and above, the strake of plating in way of the hold beams is to be increased $\frac{1}{20}$ of an inch in thickness for one-half the vessel's length amidships.
- 2. In the columns for plating in Table S 2, where two thicknesses are given they are to be worked in alternate strakes, and the greater thickness is to apply to the outer strakes, and the lesser thickness to the inner strakes; and the size of the rivets and double riveting are to be regulated by the thickness of the thicker plating.
- * When plates have to be doubled, the butts of these plates and of the doubling plates are to have the butt-straps double or treble riveted, as may be required by Section 20, and, in addition, these doubling plates are to be well riveted at the edges and middle of the plates between the frames in addition to the rivets which pass through the frames, and the middle of the plates to be riveted up before the edges.

- 3. No plates to be less in length than six spaces of frames, except the fore and after lengths.
- 4. No butts of outside plating in adjoining strakes to be nearer each other than two spaces of frames; and the butts of the alternate strakes not to be under each other, but shifted not less than one frame space.
- 5. The butts of the upper or main deck, and of spar deck stringer plates, in all cases to be shifted not less than two spaces of frames clear of the butts of the sheerstrakes.
- 6. The butts of the garboard strakes to be shifted clear of the keel scarphs, and not to be nearer each other on opposite sides of the vessel than two spaces of frames.
- 7. All butts of plating, where practicable, to be planed and fitted close; the edges of the plating to be sheared from their faying surfaces, or the burr caused by shearing to be carefully chipped off, and all outside edges of plating are to be either planed or chipped fair. The butts and edges to be carefully caulked.
 - 8. The breadth and thickness of the sheerstrakes and garboard strakes to be as given in Table S 2.
- 9. The sheerstrakes in one, two, and three decked, and spar-decked vessels to be fitted sufficiently high above the upper deck beam ends, so as to take at least two rows of rivets vertically in the butts above the upper flange of the gunwale angle bar.
- 10. The boss-plates covering the screw shaft are to be the same thickness as the strakes amidships of which they form part where the number for plating is under 13,900; if that number and under 18,700, the plates are to be $\frac{1}{20}$ of an inch thicker; and if the number is 18,700 and under 26,500, the plates are to be $\frac{1}{20}$ of an inch thicker than the midship plating, and the butts treble riveted; and where the number is 26,500 and above, the boss-plates and the plates above and below the same to be $\frac{2}{20}$ of an inch thicker than the midship plating, and their butts double strapped, or lapped and treble riveted; or the boss plates are to be doubled.
- 11. When plates forming the outside strakes of plating are above 40 inches but not exceeding 46 inches, or those forming the inside strakes are 48 inches in breadth and not exceeding 54 inches, their butts are to be treble riveted with straps $\frac{1}{20}$ of an inch thicker than the plates they connect. Where the butt-straps of such strakes are required by Section 20 to be treble riveted, the straps required by that section should be of this increased thickness excepting where the straps are therein required to be $\frac{4}{20}$ of an inch thicker than the plates.
- 12. Where gutter waterways are adopted at the upper deck, the butt-straps of the bulwark plating are to be sufficiently broad to receive the spur in the middle of the bulwark stay; and when the plates do not exceed 12 feet in length they are to have stays fitted against the butt-straps, and an intermediate stay is to be fitted between the butts on straps or doubling plates. In no case are the stanchions which support the bulwarks to be more than 6 feet apart, and in sailing vessels of 1,800 tons and above, the spacing is not to exceed 4 to 5 feet apart; the heel of each stanchion to be attached by not less than four $\frac{7}{8}$ inch bolts, tapped through the stringer plate, and secured with a nut and grummet. Their size may be from $1\frac{3}{8}$ in. to 2 in. in diameter, regulated by the length of the stanchion and the size of the vessel. Other forms of stanchions may be adopted, provided they be submitted for approval.

BUTT-STRAPS AND LINING PIECES.

Section 20. 1. In vessels whose plating number does not exceed 8,000, the butt-straps of the sheerstrake, deck stringer plate, and one strake at the bilges for half the vessel's length amidships are to be $\frac{1}{20}$ of an inch thicker than the plates they connect, and to be double riveted.

- 2. When the plating number is above 8,000 and not exceeding 13,000, the butt-straps of the sheerstrake, deck stringer plate, and two strakes round the bilges are to be $\frac{2}{20}$ of an inch thicker than the plates they connect, for half the vessel's length amidships, and treble riveted.
- 3. When the plating number is over 13,000 and not exceeding 16,000, an additional strake of bilge plating is to be treble riveted at the butts for half the length amidships with straps $\frac{2}{20}$ of an inch thicker than the plates they connect.
- 4. When the plating number is over 16,000 and not exceeding 20,000, the butts of the sheerstrake, deck stringer plate, three strakes of bilge plating, and the remaining outside strakes of plating are to be treble riveted with straps $\frac{2}{20}$ of an inch thicker than the plates they connect, for half the vessel's length amidships.
- 5. When the plating number is above 20,000 and not exceeding 24,000, all the butts, including those of the upper and middle deck stringer plates, are to be treble riveted for half the vessel's length amidships with straps $\frac{3}{20}$ of an inch thicker than the plates they connect, with the rivets in the back row spaced 5 to $5\frac{1}{4}$ diameters apart; and the remaining butt-straps to be $\frac{2}{20}$ of an inch thicker than the plates.
- 6. In addition, in vessels where the plating number is 20,000 and under 28,000, the butts of the upper deck stringer plate are to have double straps for half the vessel's length amidships; the thickness of the straps to be as given in paragraph 14 of this section, or, the butts may be lapped and treble riveted; but where the plating number is 28,000 and above, double butt straps are to be fitted to the stringer plates for half the vessel's length.
- 7. When the plating number is above 24,000 and not exceeding 28,000, all the butt straps, including those of the upper and middle deck stringer plates, are to be treble riveted for three-fourths the length amidships with the back row of rivets spaced 5 to $5\frac{1}{4}$ diameters apart. The butt-straps for half the length amidships to be $\frac{4}{20}$ of an inch thicker than the plates; and the remaining butt-straps $\frac{2}{20}$ of an inch thicker than the plates.
- 8. When the plating number is above 28,000, the whole of the butt straps all fore and aft, including those of the upper and middle deck stringer plates, are to be treble riveted with the back row of rivets spaced 5 to $5\frac{1}{4}$ diameters apart, and to be $\frac{4}{20}$ of an inch thicker than the plates they connect for three-fourths the length amidships, and $\frac{2}{20}$ of an inch at the ends. In vessels of this size and exceeding 12 depths in length, double butt-straps to be fitted to the sheerstrake and strake below, or other equivalent strength supplied to the satisfaction of the Committee. (See also footnote on Table S 6.)
 - 9. The butt-straps of flat keel plates are to be treble riveted, and as much thicker than the plates
- 10. The rivets in the butt straps of outside plating and the upper and middle deck stringer plates they connect as is required for bilge strakes.
- to be spaced not more than $3\frac{1}{2}$ diameters apart from centre to centre, except in the back rows in treble riveted butt-straps, which are to be spaced 5 to $5\frac{1}{4}$ diameters.
- 11. When plates forming the outside strakes of plating are above 40 inches, but not exceeding 46 inches, or those forming the inside strakes are 48 inches in breadth and not exceeding 54 inches, their butts are to be treble riveted with straps $\frac{1}{20}$ of an inch thicker than the plates they connect. Where the butt-straps of such strakes are required by the preceding paragraphs to be treble riveted, they should be of this increased thickness, excepting where the straps are therein required to be $\frac{4}{20}$ of an inch thicker than the plates.

- 12. All butt-straps to be of the breadth given in Table S 8, and in no case, where single, to be less in thickness than the plates they connect.
- 13. Where the butts of plating are overlapped, the width of the laps and the riveting of the same are to be as given in Table S 8. In vessels where the plating number is under 16,000, the lap butts of the outside plating for one-half of the vessel's length amidships are to be treble riveted, and the remaining butts double riveted, and where the plating number is 16,000 and above, the lap butts are to be treble riveted throughout. The treble riveted butts to have three complete rows of rivets.
- 14. Where double butt straps are fitted to stringer plates, sheerstrakes, and outside plating, the thickness of straps to be as given in the following table.

Thickness of Plating.	Strap which is counter- sunk for rivets.	Strap on opposite side of Plate.
Inches.	Inches,	Inches.
$\frac{9}{20}$	$\frac{1}{20}$ is tage 5	$\frac{6}{20}$
$\frac{1}{2}\frac{0}{0}$	$\frac{8}{20}$	$\frac{6}{20}$
$\frac{1}{2}\frac{1}{0}$	8 20	$\frac{7}{20}$
$\frac{1}{2}\frac{2}{0}$	$\frac{9}{20}$	$\frac{7}{20}$
$\frac{1}{2}\frac{3}{0}$	$\frac{10}{20}$	$\frac{8}{20}$
$\frac{14}{20}$	$\frac{10}{20}$	$\frac{9}{20}$
$\frac{1}{2}\frac{5}{0}$	$\frac{1}{2}\frac{1}{0}$	$\frac{9}{20}$
$\frac{16}{20}$	$\frac{1}{2}\frac{2}{0}$	$\frac{1}{2}\frac{0}{0}$
$\frac{17}{20}$	$\frac{1}{2}$	$\frac{1}{2}\frac{1}{0}$
$\frac{18}{20}$	$\frac{1\cdot 3}{2\cdot 0}$	$\frac{1}{2}\frac{1}{0}$
$\begin{array}{c} 19 \\ \overline{20} \end{array}$	$\frac{14}{20}$	$\frac{1}{2}\frac{2}{0}$
$\frac{20}{20}$	$\frac{14}{20}$	$\frac{1}{20}$
$\frac{21}{20}$	$\frac{1}{2}\frac{5}{0}$	$\frac{13}{20}$
$\frac{2}{2}\frac{2}{0}$	$\frac{15}{20}$	$\frac{1}{2} \frac{4}{0}$

LINING PIECES.

15. The space between the plating and the frames to have solid filling or lining pieces in one length, closely fitted; to be of the same breadth as the frames, excepting in way of bulkheads, where they are to be fitted as stated in Section 22, paragraph 6.

RIVETING AND RIVETS.* (See also Table S 8.)

- Section 21. 1. The landing edges of outside plating when $\frac{7}{20}$ of an inch in thickness and above from the keel to the upper turn of bilge, and of the sheerstrake in all cases; and when $\frac{9}{20}$ of an inch and above from the upper turn of bilge to the gunwale, must be double riveted; below these thicknesses the edges may be single riveted. In all cases the thicker of the two plates or angles is to
- * When plates have to be doubled, the butts of these plates and of the doubling plates are to have the butt-straps double or treble riveted, as may be required by Section 20, and, in addition, these doubling plates are to be well riveted at the edges and middle of the plates between the frames in addition to the rivets which pass through the frames, and the middle of the plates to be riveted up before the edges.

regulate the size of the rivets and the requirements as to double riveting. When the plating is of a thickness amidships to require the edges to be double riveted, the same is to be continued all fore and aft. The stem, stern-post, keel, butts of outside plating, breasthooks, transoms, stringer and tie-plates on beams, also butts of keelsons, stringers, and all longitudinal ties, to be at least double riveted in all vessels.

- 2. The butts of outside plating to be chain riveted; also all double and treble riveting, except in the keel, stem, and stern post.
- 3. In the butts of outside plating, a space equal to twice the diameter of the rivet to be between each row; where treble riveting is adopted, a space equal to twice the diameter of the rivet to be between each row, with half the number of rivets in the back row in vessels whose plating number is 20,000 or under; and when above this number, the rivets in the back row are to be not more than 5 to 5¼ diameters from centre to centre.
 - 4. The overlaps of the edges and butts of plating to be of the breadth given in Table S 8.
- 5. The rivets are not to be nearer to the butts or edges of the plating, butt-straps, or of any angle bars than a space equal to their own diameter; and in edge riveting the space between any two consecutive rows of rivets must not be less than once and a half their diameter.
- 6. The rivet holes to be regularly and equally spaced and carefully punched from the faying surfaces opposite each other in the adjoining parts, laps, lining pieces, butt-straps, and frames; and countersinking to extend through the whole thickness of the plate or angle bar (see sketches on Table). They are to be spaced not more than 31 diameters of the rivet apart from centre to centre in the butts of the outside plating, upper, spar, and middle deck stringer plates, and not more than from 4 to 4½ diameters apart in the edges of the plating and at other parts, excepting in the keel, stem, and sternpost, where they may be 5 diameters, and through the keelsons, floors, frames, and reversed frames, frames and outside plating and the beam angles, where they may be 7 diameters apart from centre to centre. The rivets in the flanges of the gunwale angle bars to be spaced not more than 41 diameters apart from centre to centre, and those connecting steel decks and stringer plates to the beams to be spaced from 7 to 8 diameters apart in each flange of the beam, except where channel or bulb angle beams or single angle beams are fitted to alternate frames, where the rivets are not to be spaced more than 5 diametres apart. The rivets in the butts of deck plating are not to be spaced more than 4 diameters, and those in the edges not more than from 4 to 41 diameters apart. Before the three-fifths length of a steamer having a tonnage co-efficient of '78 or having a full form at the fore part, the rivets in the landing edges of the strakes of plating forming the flat of the bottom to be spaced not more than 4 diameters apart. The rivets in the plating and frames in way of the same to be spaced not more than $5\frac{1}{2}$ diameters apart.
 - 7. The spacing of the rivets in the double angles of the flat plate keels is not to exceed 5 diameters.
- 8. For arrangements of rivets showing minimum number in each frame space in the edges of plating amidships, see Table S 8.
- 9. There are not to be less than four rivets in each flange of the angle bars between the frames which connect the stringer plates and intercostal plates to the outside plating where the spacing of the frames from centre to centre is 23 inches and above; but where the frames are closer spaced, there are not to be less than three rivets.
- 10. The rivets are to be of the best quality, and to be in diameter as per Table S 8, and to be increased in size under their heads to fill the rivet holes. When riveted up, the rivets are completely to

fill the holes, their heads are to be "laid up," and their points or outer ends are not to be below the surface of the plating. Rivets in side plate rudders to be of not less size than those required for the upper edge of the garboard-strake amidships and spaced not more than five diameters from centre to centre. The plates to be countersunk and the rivets to have full heads and points.

BULKHEADS.

- Section 22. 1. Screw steamers are to have a watertight bulkhead at each end of the engine and boiler space. In addition a watertight collision bulkhead is to be fitted at not less than one-twentieth of the vessel's length abaft the stem at the lower deck, and a watertight bulkhead is also to be fitted at a reasonable distance from the after end of the vessel. In all cases the foremost or collision bulkhead is to extend from the floor plates to the upper, spar, or awning deck, and its water-tightness is to be tested by filling the peak with water to the height of the load line.
- 2. In steamers 280 feet and under 330 feet in length, an additional watertight bulkhead is to be fitted in the main hold about midway between the collision and boiler room bulkheads. In steamers 330 feet and under 400 feet in length, an additional watertight bulkhead is to be fitted in the after hold; in steamers 400 feet and under 470 feet in length, seven watertight bulkheads are to be fitted; in steamers 470 feet and under 540 feet in length, eight watertight bulkheads are to be fitted, and in steamers 540 feet and under 600 feet in length, nine watertight bulkheads are to be fitted. These bulkheads are to extend to the height of the upper deck in vessels with one, two, or three decks, to the spar deck in spar deck vessels, and to the main deck in awning or shelter deck vessels. In awning or shelter deck vessels, or vessels with a continuous superstructure, a deep web frame or partial bulkhead is to be fitted on each side in the 'tween decks, over each of the watertight bulkheads which extend only to the main deck.
- 3. When a bulkhead is not completed at one pair of frames from the floor-plate up to its prescribed height per rule, but is recessed, stepped, or stopped at an intermediate part, the water-tightness is to be completed with collars or chocks forming a "metal to metal" connection, to the exclusion of cement, wood, &c. The bulkheads to be connected to the decks and to double bottom plating by double angles of the size of the reversed frame, and to be extended to the outside plating by a watertight sub-division at or near each bulkhead required by Rule.
- 4. The engine-room bulkheads to extend from the floor-plates to the upper deck, in vessels with one, two, or three decks; and to the spar deck in spar-decked vessels, and main deck in awning-decked vessels. The aftermost bulkhead will be required to extend to the height of the upper or spar deck, unless a different arrangement of bulkheads be approved by the Committee. This bulkhead is to be made water-tight by a stuffing box where the screw shaft passes through, and its water-tightness is to be tested by the after compartment being filled with water to the height of the load line.
 - 5. In sailing vessels the foremost or collision bulkhead only will be required.
- 6. All plating of bulkheads to be of the thickness prescribed in Table S 1, fitted between two frames at each side of the vessel and to be strongly riveted to them, and to be connected to the floor of plates by a double row rivets. Doubling plates between frames and outside plating in way of

bulkheads, are to extend in one piece from the foreside of the frame afore to the aftside of the frame abaft the bulkhead frames, or they may be of an approved diamond shape, fitted and riveted as shown in sketch. (See page 145.)

- 7. The bulkheads to be supported vertically on one side and horizontally on the other, with angle bars of not less size than required for the main frames. The vertical angles to be not more than 2 feet 6 inches apart, and their lower ends to extend well down over the floor plates; or, where a double bottom is fitted, they are to be connected to the inner bottom plating by plate brackets. The horizontal stiffeners are not to exceed 4 feet apart, below where the bulkhead is supported by a laid deck, and, when of bulb angle, they are to be attached with brackets to the vessel's sides. In all collision bulkheads, and other bulkheads of 40 feet and above in breadth, the horizontal stiffeners are to be of bulb angles, one inch deeper than required by Table S 1, for bulb angle frames. All bulkheads of 36 feet and under 45 feet in breadth, to be additionally stiffened by a vertical web at the middle line, extending from the keelson to the hold or lower deck beams. Bulkheads of 45 feet and under 55 feet in breadth, to have two vertical webs, and bulkheads of 55 feet and under 60 feet in breadth to be fitted with three vertical webs.
- 8. In vessels of a depth to require lower deck, hold, or orlop beams, when the bulkheads are not supported on both sides by a lower or orlop deck, they are to be additionally supported by a semi-box beam of the scantlings required by Table S 4 for such beams; the same to be fitted in way of the hold or orlop stringer plate, or the side stringer midway between the floor plates and the lowest laid deck.
- 9. All such bulkheads to be caulked and made thoroughly watertight, and to be tested by water from a hose, if considered necessary by the Surveyors, to ensure that they are watertight.
- 10. When a recess extending above the hold beams is formed in the engine room bulkheads the bulkhead is to be efficiently connected from side to side by tie or bridle beams, strongly riveted to the plating and fitted with efficient gusset plates.

DECKS.

WOOD DECKS.

Section 23. 1. The flat of decks, if of wood, to be of good quality, properly seasoned, free from sap and objectionable knots; the thickness and fastenings as per Table S 3.

- 2. Pine planks for weather decks should not be laid within a period of from four to six months (according to their thickness) after being cut; and where pitch pine is used for weather decks, the breadth of the planks should not exceed 5 inches, and the period of seasoning should not be less than six months.
- 3. Oregon pine of good quality will be admitted for decks of vessels, provided it be laid with the grain vertical, and the width of planks and period of seasoning be as required for pitch pine.
- 4. The above required periods of seasoning will not be necessary in cases where satisfactory artificial means of seasoning are adopted.

- 5. The Surveyors must ascertain that the requirement as to the seasoning has been complied with, and special attention should also be directed to the laying of the decks and to the caulking of the seams and rents.
- 6. When gutter waterways are adopted at the upper deck, the angle bar forming the inner edge of waterways is not to be less in thickness than

 $\frac{10}{20}$ where the thickness of the deck is 4 inches

 $\frac{9}{20}$,, , , , $\frac{8}{2}$ inches $\frac{8}{20}$, , , , 3 inches

- 7. In all cases the margin or boundary planks of weather decks to be either Teak or Greenheart.
- 8. If the deck is of teak, the thickness to be as prescribed in Table S 3.
- 9. When the deck planks are 6 inches in width or under, single fastening will be sufficient; but when they are above 6 inches and not exceeding 8 inches in width, there must be two bolts in each plank in every beam, one of which may be a short screw bolt; and planks exceeding 8 inches in width must be double fastened with nut and screw bolts.
- 10. The upper deck to be fastened by galvanised screw bolts with nuts at the under side of the angle bar of the beams and tie-plates. The bolts must be properly sunk, with oakum and white lead, under their heads, and be carefully covered over with turned dowels bedded in white lead, marine glue or some suitable composition.
- 11. Where diagonal plates are fitted on the beams, the deck planks to be scored over the diagonal plates, so as to fit close on the beams, thereby avoiding the use of wood pads.
- 12. When a deck originally required to be 4 inches thick is worn to 3 inches, $3\frac{1}{2}$ inches to $2\frac{3}{4}$ inches, 3 inches to $2\frac{1}{2}$ inches, it must be renewed, unless it be found on survey to be in good condition, when on application the case will receive the consideration of the Committee.

STEEL DECKS. (See also Table S 5.)

- 13. Where steel or iron decks are fitted less than $\frac{8}{20}$ or $\frac{7}{16}$ of an inch in thickness respectively, and no wood is laid, beams as required by Table S 4 and S $\frac{4}{10}$, are to be fitted to every frame, but at the ends of the hatchways, exceeding six frame spaces in length, the beams are to be of size required by Sec. 13, par. 2.
- 14. Where steel or iron decks are $\frac{8}{20}$ or $\frac{7}{16}$ of an inch in thickness respectively, or above, beams of the size required by Table S 4 may be fitted to alternate frames, but beams fitted to every frame are considered preferable. Where no wood deck is to be laid on a steel or iron deck, half-beams are to be fitted to every frame in the way of all hatchways, including those of engine and boiler openings.
- 15. When the deck plating is $\frac{7}{20}$ to $\frac{9}{20}$ of an inch in thickness amidships it may be reduced $\frac{1}{20}$ of an inch before and abaft the midship half length. When $\frac{10}{20}$ of an inch thick amidships it may be reduced $\frac{1}{20}$ of an inch for one-eighth the length before and abaft the half length amidships, and the remaining plates $\frac{2}{20}$ of an inch from the midship thickness.
- 16. Where a steel deck is required to be fitted by the rules, and is severed at the break, its continuity of strength is to be maintained by efficient brackets securely attached to the break bulkhead

and to the deck plating before and abaft the same, or otherwise arranged to the satisfaction of the Surveyors.

- 17. If a wood flat be laid over an iron or steel upper deck, the thickness should not be less than 3 inches if of pine and $2\frac{1}{2}$ inches if of teak, and it should be efficiently secured between the beams to the deck plating. Steel or iron decks are not to be reduced in thickness from that given by Table S 5, when sheathed with wood.
 - 18. All decks of steel or iron are to be caulked, unless sheathed by a properly caulked wooden deck.
- 19. The butts of the steel deck to be double riveted for half the length amidships; and where large openings are cut in deck plating compensation is to be given for the same.
- 20. Where steel or iron decks are fitted, as required by the Rules, additional strength is to be applied in way of all hatchways, either by increasing the thickness of, or doubling the plating, or by fitting plates of the breadth and thickness required for tie-plates in Table S 5.
 - 21. If a wood flat be laid over a steel or iron middle deck it may be $2\frac{1}{2}$ inches in thickness.
- 22. Where a vessel has a steel deck for half her length amidships, or beyond, but not a complete steel deck, or where there are one, two, or three steel decks; or one, two, or three steel decks, and in addition a partial steel deck, as before described, the same will be inserted in the Register Book thus—pt steel dk; 1 steel dk; 1 steel dk; 2 steel dk; 2 steel dks; &c., &c., as the case may be.
- 23. Iron decks will be admitted in lieu of steel decks provided the thickness of the plating be in as many sixteenths of an inch as Table S 5 requires in twentieths for steel decks, when a notification of the same will be made in the Register Book, such as 1 iron deck, &c., as the case may be.
- 24. All upper and weather decks of new vessels, of whatever material they are constructed, are when complete to have their watertightness tested by a hose in the presence of the Surveyors, who are to state in their First Entry Report the results of such tests.
- 25. All gutterways of new vessels are to be tested by being flooded with water where possible to ensure watertightness, and the Surveyors are to state in their First Entry Report the results of such tests.

DOUBLE BOTTOMS.

- Section 24. 1. Vessels fitted with a double bottom, for the purpose of water ballast, extending throughout the whole or part of the length of the vessel, will have the same denoted in the Register Book, together with its length and capacity. (See Key to Register Book.)
- 2. Side intercostal plates or side keelsons need not be fitted in the range of double bottoms; but where partial double bottoms are fitted, these keelsons are to extend into or scarph the double bottom not less than three spaces of frames, and be connected to the longitudinal girders where practicable. Side girders in a double bottom to be extended as far forward and aft as accessibility to all parts will admit. The girder nearest the middle line keelson to be extended to the collision bulkhead, except where fineness of the form of a vessel renders this unnecessary for the efficient stiffening of the bottom plating. In vessels of full form additional intercostal keelsons to be fitted in double bottoms before the three-fifths length of the vessel, of one-half the depth of the centre keelson.
- 3. Manholes, with wrought iron or steel covers, must be constructed, or provision made for the removal of a portion of the plates so as to enable the inner surface of outside plating, the frames, floors

keelsons, and rivets to be thoroughly examined and coated when required, and in way of the manholes in the inner bottom plating, doubling plates or rims should be fitted to receive the fastening of the covers. The double bottom to be made water-tight, and all water-tight joints to be tested on completion with a head of water at least equal to the extreme draught of water of the vessel.

- 4. Where deep water ballast tanks are fitted their water-tightness is to be tested by a head of water not less than 8 feet above the crown of the tank.
- 5. A wash plate to be fitted in the peaks when used for water ballast, and the tank to be subjected to the test of a head of water of 8 feet above the crown, but not less in any case than the height of the load water line.
- 6. All water-tight joints to have the surfaces of steel fitted close to each other and caulked, without, as far as practicable, the use of felt, canvas, &c.
- 7. The upper side of the plating must be protected with wood ceiling $2\frac{1}{2}$ inches thick, and laid on battens $1\frac{1}{2}$ inches thick, to admit of drainage water passing to the wells, unless the ceiling be laid on the top of the inner bottom, embedded in a substantial covering such as Stockholm tar and cement.
- 8. Where a double bottom extends through the engine and boiler space, a well should be formed between the engine-room after bulkhead and the floor immediately before the same, for the drainage of water, or open gutter ways of sufficient size should be made in the wings, so as to be always accessible.
- 9. The ceiling on double bottoms to be removed when the tanks are required by the rules to be tested.
- 10. It is of importance that ample provision should be made for the free passage of air from one division to another, so that it may readily find its way to the air pipes. This should be done by fitting the liners short, setting down the angle bar from the inner bottom or top of deep tank wherever necessary, and leaving, otherwise, a sufficient number of holes as near to the inner bottom as practicable. The air pipes should also be sufficient in number and size; and, wherever necessary, one should be fitted at each end of each tank on both sides of the vessel.
- 11. No class will be assigned to vessels having a double bottom, or part double bottom, unless such double bottom, or part double bottom, be constructed in accordance with the requirements of the Rules, or of strength equal to that prescribed thereby.
 - 12. For record of double bottoms, &c., in the Register Book, see Key to the Register Book.

Double Bottoms formed with Girders on top of Ordinary Floors.

13. Where double bottoms are fitted with longitudinal girders extending on top of ordinary floors, the inner bottom must be efficiently constructed and made water-tight; the plating of it not to be less in thickness than given in Table S 7, and the girders spaced not more than 3 feet. The double bottom to be efficiently connected to the outside plating and frames of the main body of the vessel; and when reversed frames are cut, they must be compensated for by doubling the frames with short angle bars of their own size. The butts of the flange-plate to be double riveted; the butts and edges of the remaining plates may be single riveted. The brackets outside the margin plate to be fitted to every frame and extend up the bilges to at least the same height as required for ordinary floors. Where

the plating number is 30,000 and under 40,000, the bracket plates outside the margin plate are to be connected to it by double angles for one-half the vessel's length amidships, except in cases where either deep framing or web frames are substituted for hold beams, when these double angles should be fitted in vessels whose plating number is 20,000 and under 40,000. Where the plating number is 40,000 and under 50,000, the bracket plates outside the margin plate are to be connected to it by double angles for three-fourths the vessel's length measured from the collision bulkhead, and where the plating number is 50,000 and above, the bracket plates outside the margin plate are to be connected to it by double angles all fore and aft. If it is desired to dispense with the double angles, other efficient methods of connection might be submitted for approval. Where the plating number is 30,000 and under 40,000 the bracket plates outside the margin plate should be connected to the inner bottom by gusset plates, or other efficient ties, on every fourth frame; where the plating number is 40,000 and under 50,000 on every third frame, and where the plating number is 50,000 and above on every second frame. In high powered vessels, when the Committee may think it necessary, the gusset plates are to be fitted on every frame in way of the machinery space, or a continuous plate may be fitted in lieu of gusset plates.

- 14. In steamers having a tonnage co-efficient of '78 or having a full form at the fore part, between the collision bulkhead and the three-fifths length forward, the frames to be doubled from margin plate to margin plate of double bottoms, or to the turn of bilges where double bottoms are not fitted.
- 15. When gusset plates or other ties are fitted connecting the inner bottom to outside bracket knees, the horizontal flanges of the margin plates should be of sufficient width to admit of the gusset plates or ties being efficiently fitted and riveted clear of the landing edge of the inner bottom, and the upper surface of the reverse frames on top of the outside bracket knees should be fair with the top of the inner bottom.
- 16. The angle bars connecting outside bracket knees to the margin plate to be fitted on the same side of the bracket plates as the corresponding angles connecting the floor ends or inside brackets to the margin plate.
- 17. Where double bottoms are fitted in the fore and after holds and not extended through the engine-room, great care should be taken to provide against an abrupt termination in the longitudinal girders; they are either to be carried through the engine-room, or fully compensated for by connection with the longitudinal engine and boiler bearers, or otherwise, to the satisfaction of the Surveyor. The longitudinal girders to have a continuous angle on the upper and lower edges, and, in addition, to be connected by angle lugs on the floors and girders.
- 18. Where double bottoms, or part double bottoms, are fitted with longitudinal girders on the floors, all the outside plating (except the garboard strakes) which is entirely within the boundary of them may be $\frac{1}{20}$ of an inch less in thickness than that prescribed in Table S 2, provided that thickness be $\frac{11}{20}$ of an inch, or above. In a steamer having a tonnage co-efficient of '78, or having a full form at the fore part, the two strakes of outside plating next the garboards to have the midship thicknesses maintained forward to the collision bulkhead.
- 19. The height of the tank top above the floors to be sufficient for easy access and examination of the inside of tank.

CELLULAR DOUBLE BOTTOMS.

- 20. The scantlings, &c., of the various parts of the double bottom are to be as given in Table S 7.
- 21. In vessels whose plating number is 11,000 and under, triangular bracket plates of the thickness given in Table S 7 may be fitted at alternate frames; but under the engines, solid floor plates of the same thickness, lightened by manholes, and with double angle bars on the upper edge, are to be fitted at every frame and at alternate frames under the boilers. Where the plating number exceeds 11,000 instead of bracket plates, solid floor plates, lightened by manholes, are to be fitted throughout the whole length of the double bottom. In all vessels where flat plate keels are adopted, and in vessels having hanging keels whose plating number is 18,000 and above, bracket plates are to be fitted to the centre girder at the intermediate frames, and where the plating number is 38,000 and under 51,000 the brackets at the centre girder and margin plate are to be of sufficient breadth at the top, to take three rivets in the vertical flange of the intermediate reversed angles, for $\frac{3}{5}$ the vessel's length amidships. Bracket plates inside and outside the double bottom are to be fitted and riveted to the margin plate to every frame all fore and aft, the outside brackets to extend up the bilges to the height required for ordinary floors. The floor plates are to be connected to the centre keelson by double vertical angles, of the size given in Table S 7, in the engine and boiler space in all vessels, and for half length amidships where the plating number is 24,000 and above. Where the plating number is 30,000 and under 40,000, the bracket plates outside the margin plate are to be connected to it by double angles for one-half the vessel's length amidships, except in cases where either deep framing or web frames are substituted for hold beams, when these double angles should be fitted in vessels whose plating number is 20,000 and under 40,000. Where the plating number is 40,000 and under 50,000, the bracket plates outside the margin plate are to be connected to it by double angles for three-fourths the vessel's length measured from the collision bulkhead, and where the plating number is 50,000 and above, the bracket plates outside the margin plate are to be connected to it by double angles all fore and aft. If it is desired to dispense with the double angles, other efficient methods of connection might be submitted for approval. Where the plating number is 30,000 and under 40,000 the bracket plates outside the margin plate should be connected to the inner bottom by gusset plates, or other efficient ties, on every fourth frame; where the plating number is 40,000 and under 50,000 on every third frame, and where the plating number is 50,000 and above on every second frame. In high powered vessels, when the Committee may think it necessary, the gusset plates are to be fitted on every frame in way of the machinery space, or a continuous plate may be fitted in lieu of gusset plates.
 - 22. In steamers having a tonnage co-efficient of '78 or having a full form at the fore part, between the collision bulkhead and the three-fifths length forward, the frames to be doubled from margin plate to margin plate of double bottoms, or to the turn of bilges where double bottoms are not fitted.
 - 23. When gusset plates or other ties are fitted connecting the inner bottom to outside bracket knees, the horizontal flanges of the margin plates should be of sufficient width to admit of the gusset plates or ties being efficiently fitted and riveted clear of the landing edge of the inner bottom, and the upper surface of the reverse frames on top of the outside bracket knees should be fair with the top of the inner bottom.
 - 24. The angle bars connecting outside bracket knees to the margin plate to be fitted on the same side of the bracket plates as the corresponding angles connecting the floor ends or inside brackets to the margin plate.

- 25. The vertical flange of the frame angles which are attached to the solid floors may be of the same size as the horizontal flange.
- 26. Intermediate angle bars are to be fitted for stiffening the inner bottom plating, unless the longitudinal girders are more closely spaced than given in Table S 7, and solid floors are fitted to alternate frames, when they may be dispensed with.
- 27. The keel should be formed by the vertical centre plate being extended down and riveted between two side bars, the three thicknesses to equal the thickness required for bar keels, or as otherwise approved.
- 28. The inner bottom plating to be continuous and wrought longitudinally. The butts to be shifted well clear of each other and of the butts of the longitudinal girders, and the edges to be shifted well clear of the latter.
- 29. The butts and edges of the middle line strake all fore and aft, and also the butts of the inner bottom plating in the engine and boiler space, are in all cases to be double riveted. Where the plating number is 20,000 and under 30,000 the butts of the inner bottom plating are to be double riveted for half the vessel's length amidships. Where the plating number is 30,000 and under 38,000 the butts of the inner bottom plating, and the edges of an additional strake on each side of the middle line, are to be double riveted throughout. Where the plating number is 38,000 and under 51,000 the remaining edges of the inner bottom plating are to be double riveted for one-half the vessel's length amidships.
- 30. The butts of the side girders and margin plates are to be double riveted; and in vessels whose plating number is under 21,000 the butts of the centre girder are to be connected by double butt-straps double riveted. When the plating number exceeds 21,000 the butts are to be treble riveted, with the alternate rivets in the back row omitted. The double butt-straps in all cases to be each not less than $\frac{3}{20}$ of an inch thicker than half the thickness of the plates they connect.
- 31. The rivets in the butts and edges of the inner bottom plating and in the butts of the girders are to be spaced not more than 4 diameters apart.
- 32. Manholes are not to be cut in the centre girder. The manholes in the floor plates, side girders, and inner bottom plating, are to be no larger and not more numerous than necessary to render all parts of the double bottom readily accessible. The edges of the manholes should be smooth to enable them to be entered with facility.
- 33. The bulkheads are to be connected to the inner bottom plating by double angle bars of the size required for the reversed frames, and to be caulked and made water-tight.
- 34. In this system of construction no reduction of thickness in the plating from the requirements of Table S 2 will be allowed where the floors are not spaced to every frame.
- 35. Floors to be fitted in cellular double bottoms to each frame between the collision bulkhead and the three-fifths length of the vessel amidships. In a steamer having a tonnage co-efficient of '78, or having a full form at the fore part, the two strakes of outside plating next the garboards to have the midship thicknesses maintained forward to the collision bulkhead.

CELLULAR DOUBLE BOTTOMS HAVING CONTINUOUS FLOORS FROM CENTRE GIRDER TO MARGIN PLATES.

36. When double bottoms are constructed with solid floor plates, lightened with manholes, fitted to every frame, and continuous in one length from the middle line to the margin plate, the floor plates are

to be connected to the centre keelson by double vertical angles of the size given in Table S 7 for half the length amidships where the plating number is 24,000 and above. Double vertical angles to be fitted in the engine and boiler space in all vessels. The scantlings are to be as given in Table S 7, and intercostal plates are to be fitted about midway between the centre girder and margin plate, and well connected to the floors and to the inner and outer bottom plating. Where the plating number is 30,000 and under 40,000, the bracket plates outside the margin plate are to be connected to it by double angles, for one-half the vessel's length amidships, except in cases where either deep framing or web frames are substituted for hold beams, when these double angles should be fitted in vessels whose plating number is 20,000 and under 40,000. Where the plating number is 40,000 and under 50,000, the bracket plates outside the margin plate are to be connected to it by double angles for three-fourths the vessel's length measured from the collision bulkhead, and where the plating number is 50,000 and above, the bracket plates outside the margin plate are to be connected to it by double angles all fore and aft. If it is desired to dispense with the double angles, other efficient methods of connection might be submitted for approval, Where the plating number is 30,000 and under 40,000 the bracket plates outside the margin plate should be connected to the inner bottom by gusset plates, or other efficient ties, on every fourth frame; where the plating number is 40,000 and under 50,000 on every third frame, and where the plating number is 50,000 and above on every second frame. In high powered vessels, when the Committee may think it necessary, the gusset plates are to be fitted on every frame in way of the machinery space, or a continuous plate may be fitted in lieu of gusset plates. In way of the engines additional intercostal girders are to be fitted, the number of girders to be as required by Table S 7.

- 37. In steamers having a tonnage co-efficient of '78 or having a full form at the fore part, between the collision bulkhead and the three-fifths length forward, the frames to be doubled from margin plate to margin plate of double bottoms, or to the turn of bilges where double bottoms are not fitted.
- 38. When gusset plates or other ties are fitted connecting the inner bottom to outside bracket knees, the horizontal flanges of the margin plates should be of sufficient width to admit of the gusset plates or ties being efficiently fitted and riveted clear of the landing edge of the inner bottom, and the upper surface of the reverse frames on top of the outside bracket knees should be fair with the top of the inner bottom.
- 39. The angle bars connecting outside bracket knees to the margin plate to be fitted on the same side of the bracket plates as the corresponding angles connecting the floor ends or inside brackets to the margin plate.
- 40. In vessels where the breadth from margin plate to margin plate at inner bottom is 34 feet and does not exceed 44 feet, two intercostal side girders will be required.
- 41. In this system of construction the outside plating (except the garboard strakes and flat keel plates), which is entirely within the boundary of the double bottom, may be reduced as hitherto admitted in double bottoms with ordinary floors. In a steamer having a tonnage co-efficient of '78, or having a full form at the fore part, the two strakes of outside plating next the garboards to have the midship thicknesses maintained forward to the collision bulkhead.
- 42. Any other plan of fitting double bottoms may be adopted, provided in the first instance it receives the approval of the Committee.

CEILING.

- Section 25. 1. All vessels to be closely ceiled from the main keelson to the upper part of the bilges, the ceiling to be secured in such a manner as to be easily removed. Cargo battens to be fitted from the upper part of the bilges upwards, including the 'tween decks of all types of vessels, and in permanently enclosed spaces in bridge houses, poops and other deck erections. In spaces exclusively intended for carrying coal, cargo battens may be dispensed with.
- 2. The ceiling on the floors should be made in hatches where practicable, of convenient sizes, and when not so arranged, to be fastened to the reversed angle bars or frames in such a manner as to be removed when required for the purpose of survey, or for cleaning and painting.
 - 3. For thickness of ceiling, see Table S 3.
- 4. Vessels exclusively engaged in carrying coal, ore or wood, need not have cargo battens fitted, but in each such case the certificate of classification will have the following words written on it, "Subject to the vessel being engaged exclusively in carying coal, ore, or wood, while without cargo battens."

ENGINE SPACE.

- Section 26. 1. In steam vessels care must be taken that the engine and boiler bearers are properly constructed, having efficient longitudinal ties; and where the bearers may interfere with the longitudinal strength of the vessel, they must extend a sufficient distance beyond the bulkheads of the engine and boiler space to compensate for such interruption.
- 2. Where it is intended to fit engines of greater power than in ordinary cargo carrying steamers, the engine seating should be of proportionately greater strength, and be specially adapted with this object in view by being connected to the sides of the vessel; and other means adopted to ensure greater rigidity and strength to withstand the extra vibration produced in this part of the vessel. The after floor-plates should also be extended well above the screw-shaft, and the after lengths of outside plating attached to the stern-frame should be of not less thickness than the plates in the same range amidships. Great care should be bestowed in ensuring sound riveting and workmanship at this part; the after frames should be sufficiently apart transversely to admit of this being affected.
- 3. As many *upper*, *middle*, and hold or lower-deck beams of extra strength, having double angles at upper and lower edges of the sizes as per Table S 4, are to be introduced in the engine and boiler space as may be practicable. (See Section 14, paragraph 32.)
- 4. In the engine and boiler space, double reversed angles must be fitted to every floor, from bilge to bilge, and from margin plate to margin plate in vessels having double bottoms; and in vessels where the number for plating is 15,000 and above (excepting in way of double bottoms), or the depth from the top of keel to top of hold beams is 17 feet or above, they are to extend sufficiently high to admit of the bilge stringer angles being riveted to them, unless the bilges are otherwise additionally strengthened by webframes, beyond the requirements of the rules. Where the number is 16,000 and under 18,000, not less than three web-frames are to be fitted on each side, formed of plates of not less than the thickness of the frames, and of the breadth specified in Section 14a, and to scarph the ends of the floors, and extend to the upper or spar deck. Where the number is 18,000 and under 30,000 these web-frames are not to be

to be connected to the centre keelson by double vertical angles of the size given in Table S 7 for half the length amidships where the plating number is 24,000 and above. Double vertical angles to be fitted in the engine and boiler space in all vessels. The scantlings are to be as given in Table S 7, and intercostal plates are to be fitted about midway between the centre girder and margin plate, and well connected to the floors and to the inner and outer bottom plating. Where the plating number is 30,000 and under 40,000, the bracket plates outside the margin plate are to be connected to it by double angles, for one-half the vessel's length amidships, except in cases where either deep framing or web frames are substituted for hold beams, when these double angles should be fitted in vessels whose plating number is 20,000 and under 40,000. Where the plating number is 40,000 and under 50,000, the bracket plates outside the margin plate are to be connected to it by double angles for three-fourths the vessel's length measured from the collision bulkhead, and where the plating number is 50,000 and above, the bracket plates outside the margin plate are to be connected to it by double angles all fore and aft. If it is desired to dispense with the double angles, other efficient methods of connection might be submitted for approval. Where the plating number is 30,000 and under 40,000 the bracket plates outside the margin plate should be connected to the inner bottom by gusset plates, or other efficient ties, on every fourth frame; where the plating number is 40,000 and under 50,000 on every third frame, and where the plating number is 50,000 and above on every second frame. In high powered vessels, when the Committee may think it necessary, the gusset plates are to be fitted on every frame in way of the machinery space, or a continuous plate may be fitted in lieu of gusset plates. In way of the engines additional intercostal girders are to be fitted, the number of girders to be as required by Table S 7.

- 37. In steamers having a tonnage co-efficient of '78 or having a full form at the fore part, between the collision bulkhead and the three-fifths length forward, the frames to be doubled from margin plate to margin plate of double bottoms, or to the turn of bilges where double bottoms are not fitted.
- 38. When gusset plates or other ties are fitted connecting the inner bottom to outside bracket knees, the horizontal flanges of the margin plates should be of sufficient width to admit of the gusset plates or ties being efficiently fitted and riveted clear of the landing edge of the inner bottom, and the upper surface of the reverse frames on top of the outside bracket knees should be fair with the top of the inner bottom.
- 39. The angle bars connecting outside bracket knees to the margin plate to be fitted on the same side of the bracket plates as the corresponding angles connecting the floor ends or inside brackets to the margin plate.
- 40. In vessels where the breadth from margin plate to margin plate at inner bottom is 34 feet and does not exceed 44 feet, two intercostal side girders will be required.
- 41. In this system of construction the outside plating (except the garboard strakes and flat keel plates), which is entirely within the boundary of the double bottom, may be reduced as hitherto admitted in double bottoms with ordinary floors. In a steamer having a tonnage co-efficient of '78, or having a full form at the fore part, the two strakes of outside plating next the garboards to have the midship thicknesses maintained forward to the collision bulkhead.
- 42. Any other plan of fitting double bottoms may be adopted, provided in the first instance it receives the approval of the Committee.

CEILING.

- Section 25. 1. All vessels to be closely ceiled from the main keelson to the upper part of the bilges, the ceiling to be secured in such a manner as to be easily removed. Cargo battens to be fitted from the upper part of the bilges upwards, including the 'tween decks of all types of vessels, and in permanently enclosed spaces in bridge houses, poops and other deck erections. In spaces exclusively intended for carrying coal, cargo battens may be dispensed with.
- 2. The ceiling on the floors should be made in hatches where practicable, of convenient sizes, and when not so arranged, to be fastened to the reversed angle bars or frames in such a manner as to be removed when required for the purpose of survey, or for cleaning and painting.
 - 3. For thickness of ceiling, see Table S 3.
- 4. Vessels exclusively engaged in carrying coal, ore or wood, need not have cargo battens fitted, but in each such case the certificate of classification will have the following words written on it, "Subject to the vessel being engaged exclusively in carying coal, ore, or wood, while without cargo battens."

ENGINE SPACE.

- Section 26. 1. In steam vessels care must be taken that the engine and boiler bearers are properly constructed, having efficient longitudinal ties; and where the bearers may interfere with the longitudinal strength of the vessel, they must extend a sufficient distance beyond the bulkheads of the engine and boiler space to compensate for such interruption.
- 2. Where it is intended to fit engines of greater power than in ordinary cargo carrying steamers, the engine seating should be of proportionately greater strength, and be specially adapted with this object in view by being connected to the sides of the vessel; and other means adopted to ensure greater rigidity and strength to withstand the extra vibration produced in this part of the vessel. The after floor-plates should also be extended well above the screw-shaft, and the after lengths of outside plating attached to the stern-frame should be of not less thickness than the plates in the same range amidships. Great care should be bestowed in ensuring sound riveting and workmanship at this part; the after frames should be sufficiently apart transversely to admit of this being affected.
- 3. As many *upper*, *middle*, and hold or lower-deck beams of extra strength, having double angles at upper and lower edges of the sizes as per Table S 4, are to be introduced in the engine and boiler space as may be practicable. (See Section 14, paragraph 32.)
- 4. In the engine and boiler space, double reversed angles must be fitted to every floor, from bilge to bilge, and from margin plate to margin plate in vessels having double bottoms; and in vessels where the number for plating is 15,000 and above (excepting in way of double bottoms), or the depth from the top of keel to top of hold beams is 17 feet or above, they are to extend sufficiently high to admit of the bilge stringer angles being riveted to them, unless the bilges are otherwise additionally strengthened by webframes, beyond the requirements of the rules. Where the number is 16,000 and under 18,000, not less than three web-frames are to be fitted on each side, formed of plates of not less than the thickness of the frames, and of the breadth specified in Section 14a, and to scarph the ends of the floors, and extend to the upper or spar deck. Where the number is 18,000 and under 30,000 these web-frames are not to be

more than from 8 to 10 feet apart, and where the number is 30,000 and above they are not to exceed 8 feet apart. The web-frames are to be fitted in way of the deck beams when practicable, and if fitted between the beams they are to be connected to the stringer plate by bracket knees above and below the same.

- 5. Where continuous bilge or side stringer bars pass through the web frames efficient compensation to be introduced in way of the same.
- 6. When hold beams are omitted in the engine and boiler space the web-frames are to be closer spaced than above described.
- 7. Where it is desired to adopt other plans than the foregoing for maintaining the necessary rigidity in the engine and boiler space, sketches of the same must be submitted for the approval of the Committee.

SHAFT TUNNEL.

8. The plating of shaft tunnels to be of the thickness required in Table S 1 for the lower half of bulkhead plating: the top plating in way of the hatchways to be not less than $\frac{2}{20}$ of an inch thicker than the remaining plates, or to be covered with wood not less than two inches thick. The tunnel to be additionally strengthened with transverse angle bars not more than 4 feet apart, and 3 feet in way of the hatchways, of the size of the reversed frames, and the plating to be caulked, and the tunnel to be tested with water to ensure its being water-tight. The recess bulkhead and the top plating to be strengthened and supported by similar angles, but spaced the same as the vessel's frames: the top plating where attached to the sides of the vessel to be made water-tight with steel or iron collars or chocks, to the exclusion of wood or cement. The tunnel to be fitted with a water-tight sluice door on the engine-room bulkhead, capable of being closed from the upper deck.

COCKS, VALVES, AND SOIL PIPES. (See also Section 38.)

Section 27. 1. No sluice valve or cock is to be fitted to the collision bulkhead.

- 2. No sluice valves or cocks are to be fitted to the engine room, or other watertight bulkheads, unless they are arranged so as to be at all times accessible.
- 3. If the after peak is used as a ballast tank, no sluice valve or cock is to be fitted to the after bulkhead; but if it is not so used, and if no pump is fitted in it, a sluice valve or cock is to be fitted to the after bulkhead, to allow water to reach the pumps when required.
- 4. When sluice valves are fitted, they are to be so arranged as to be controlled above the Load Water Line, and the rods are to be boxed in to prevent injury.
- 5. All head and stern pumps to be efficiently provided with stop-cocks to the satisfaction of the Surveyors.
- 6. Where soil pipes are attached to the outside plating below the load water-line, the lower length must be of steel or iron of substantial thickness, and be secured to the plating with a proper faced joint, and extended for some distance above the load water-line.
- 7. If the remainder of the pipe be of lead, care must be taken that it be of substantial thickness, and that it be properly protected externally with either zinc or iron, to the satisfaction of the Society's Surveyors.

HATCHWAYS AND MAST PARTNERS.

- Section 28. 1. All hatchways are to be properly framed to receive half-beams where required, and the mast-holes to have partners at the upper deck and at the tier of beams where the masts are wedged, the plating of which is not to be less in thickness in any case than is required for stringer plates amidships, excepting in steamers where steel or iron decks are fitted, and the united breadths of the plates are not to be less than twice the diameter of the masts. At the decks where the masts are to be wedged, an angle bar, having the vertical flange not less than one inch deeper than required for the main frame of the ship, is to be fitted and riveted round the plate to the mast-holes.
- 2. A large angle bar is to be fitted on the beams where coamings are to be fitted, of sufficient size to compensate for double angles, the angle bar to be on the side of the beam that will be clear of the hatchway space. Plates are to be fitted and riveted to these beams, where necessary, in order that the ends of the deck may be properly fastened; and the coaming plates at sides of hatchways are to be connected to plates of the thickness required for tie-plates.
- 3. Where upper deck hatchways are 12 feet and not exceeding 16 feet in length, strong shifting beams are to be fitted, with proper means for firmly securing the same. Where the length is above 16 feet and not exceeding 20 feet, a deep web-plate is to be fitted between double angles, at the middle of the length, extending the depth of the coamings and carlings; and the fore and aft tie-plates in way of the same, and extending two spaces of beams beyond each end of the hatchway or opening, are to be double the width of that given in Table S 5, or such other arrangement as may be considered equal thereto may be adopted if approved by the Committee. When the length exceeds 20 feet a deck plan is to be submitted for the approval of the Committee, showing the necessary additional transverse strength proposed to be applied, by increasing the number of web-plates, and either increasing the width of the stringer and tie-plates or by plating the beams in way of the same, as the case may require. Where steel or iron decks are fitted as required by the Rules, additional strength is to be applied in way of all hatchways either by increasing the thickness of, or doubling the plating, or by fitting plates of the breadth and thickness required for tie-plates in Table S 5.
- 4. All hatchway coamings on weather decks and the companions at the fore-end of steamers to be of steel or iron.
- 5. In all cases where half-beams are fitted, fore and aft carlings of the same size and description as the hatchway beams, are to be fitted in the hatchway spaces; the plates forming the coamings and head ledges are to be of sufficient strength in proportion to their size, and are to extend to the lower edge of the beams and carlings, and must be riveted to them, excepting that when the beams are of bulb plate they may then terminate on the bulb; where coaming plates are of extra thickness the carlings may be dispensed with. (See sketches on page 141.)
- 6. Half beams are to be fitted to alternate frames where a wood deck is fitted, and to every frame under a steel or iron deck, between the hatchway beams, and their ends to be efficiently secured to the fore and aft carlings or coamings. In addition, fore and aft tie-plates are to be fitted close to the coamings and riveted to the beams and half-beams. An angle bar with its flange of sufficient depth to extend half

an inch above the deck is to be fitted and riveted to the coamings and head ledge plates, and to the beams and tie-plates; its upper edge to be properly caulked, and the rivets used in its vertical flange to be countersunk and flush-headed.

- 7. In vessels having long hatchways for the purpose of "self trimming," wing boards are to be fitted to the approval of the Committee, to prevent the shifting of cargo.
- 8. The hatches of sailing vessels of 500 tons and above, and of all steamers, to be solid, not less than $2\frac{1}{2}$ to 3 inches in thickness.

ENGINE AND BOILER OPENINGS.

- Section 29. 1. The engine and boiler openings of the weather deck of steam vessels are to be properly framed for a height of not less than 18 inches above the deck, the coaming plates to extend to the lower edge of the beams, and iron or steel trunk bulkheads connected to the coamings should be fitted to a height of about 7 feet above the deck; except in Awning and Partial Awning deck vessels where the height of the casing need not exceed 4 feet 6 inches above the deck, provided suitable iron covers be fitted, and the openings have coamings on the top of the casings not less than 9 inches in height; the thickness of the same, where exposed, to be not less than that required for the side plating of poops, and to be efficiently stiffened by vertical angles of the size of the reversed frames 30 inches apart, connected to the coaming plates. The thickness of the coamings to be $\frac{1}{16}$ of an inch more than required for the trunk bulkheads. Where the trunk bulkheads are enclosed by a complete bridge-house extending to the sides of the vessel, and efficiently protected from the force of the sea, a reduction from the above thickness might be admitted, provided in such cases a plan showing the proposed arrangement be furnished for approval. (See sketches on page 142.)
- 2. The engine and boiler openings in the 'tween decks of all vessels are also to be enclosed by trunk bulkheads efficiently stiffened by angle bars 30 inches apart, and extending to the weather deck beams, to which they are to be secured.
- 3. Strong iron doors will be allowed in these trunk bulkheads, provided their lower parts are at least 18 inches above the deck, and efficient arrangements made for their security.
- 4. When a poop, or bridge-house, covers the engine and boiler space, the coamings of the engine and boiler openings should not be less than 2 feet above such deck, unless these openings are constructed as provided for in the first paragraph of this section.
- 5. It is considered that in all cases the engine and boiler openings should be made as small as practicable, and be subdivided by athwartship iron divisional casings to secure the maximum safety of the vessel. The two sides of the casing should in all instances be efficiently connected by angle beams within them at the upper part.
- 6. The engine-room skylights are to be in all cases substantially constructed and to be securely bolted or riveted to the coamings, and where the skylight top is not solid with bull's eyes fitted in the same, efficient deadlights of metal or wood must be provided. The grating openings over the stokehold must also be protected by plates, fitted with hinges, or otherwise in a manner satisfactory to the Surveyors.

- 7. Where either of the openings exceeds 15 feet, or the combined length exceeds 30 feet, the beams in way of the same are to be plated over from the stringer to the tie-plates, the plating extending two beam spaces beyond the openings, and tapered from thence towards the stringer plate for a distance not less than the breadth of the plating required to be fitted; the thickness of this plating to be the same as given in Table S 5 for steel decks.
- 8. Where large openings are adjacent to each other, the intervening space between the hatchways to be plated over.

COAL BUNKER PIPES AND LIDS.

Section 30. Coal bunker pipes, where practicable, are to be formed so as to be at least twelve inches above the upper deck, fitted with lids having studs to fit in openings made in the pipes, for their security; the pipes to be so formed that tarpaulin may be securely lashed over them. Where there are coal bunker hatches in the weather deck they must be properly framed with coaming plates of suitable height having solid hatches secured by an iron bar or other approved fastening.

PORTS AND SCUPPERS.

- Section 31. 1. All vessels must be fitted with a sufficient number of ports and scuppers, to readily discharge any large quantity of water from the upper deck. The ports and flaps, where such are adopted, are to be hung by strong hinges with yellow metal pins, and the scuppers formed in the vertical flange of the upper deck stringer angle bar, which is to be increased in depth so as to enclose the scuppers; or any other equally efficient plan may be adopted.
- 2. Where the bulwark plating and main rail are cut through to form a cargo port, the bulwark stays at each end of the port should be of increased strength, to the satisfaction of the Surveyors.
- 3. A sufficient number of scuppers, with proper pipes attached to them, are to be fitted in all 'tween decks to convey water or leakage to the bilges.
- 4. In Well deck vessels, the freeing port area in the "Well" should be in accordance with the following Table:—

Length of Buly in "Well," in t			Fre	eeing Port Area on each side, in square feet.
30		,		9.5
35				10.0
40				10.5
*45				11.0
50				11.5
55				12.0
60				12.5
65 an	d above, one squ	are foot to	each 5-ft. len	gth of bulwarks.

VENTILATORS.

Section 32. It is recommended that ventilators, sufficient in number and size, be efficiently fitted to the upper deck of all vessels.

- 2. When scuttles are fitted for ventilation in the topsides of vessels, strong covers for them are to be provided; these covers to be efficiently fitted, to the approval of the Surveyors.
- 3. Where scuttles are fitted in the sheerstrake within three-fifths of the vessel's length amidships, compensation is to be given either by an extra thickness in the sheerstrake, doubling plate in way of the scuttles, or else by the introduction of strong angle bars over them.

CHAIN PLATES.

Section 33. The chain plates to be in proportion to the size of the vessel, and riveted efficiently to the outside plating (not bulwark plating), the sheerstrake being preferable.

BITTS.

Section 34. All bitts, when not of steel or iron, and which do not go down to the deck below, to be fitted into proper sockets fastened through the deck to plates riveted to the beams.

CEMENT.

- Section 35. 1. The frames and plating of the bottom of all vessels to the upper parts of the bilges to be thickly and efficiently covered with Portland or other approved cement, which may be mixed with sand or other suitable substance. Care to be taken to have a proper substance of cement at its termination, and to keep the watercourses clear all fore and aft. The whole to be to the satisfaction of the Surveyors.
- 2. Where asphalt, enamel cement, or similar compositions are to be used, the same must be sanctioned by the Owners, and samples are to be submitted for the approval of the Committee.
- 3. The condition of such compositions is to be ascertained by the Society's Surveyors biennially, and vessels coated with compositions as above described will be distinguished with a record of "Asp." in the Register Book.

RUDDERS AND STEERING GEARS.

Section 36. 1. Rudders to be made to ship and unship while the vessel is afloat. The scantlings of a rudder to be regulated by the number which governs the thickness of the vessel's plating, except in a spar-deck vessel, where the number for rudder scantlings is to be taken as for a three-deck vessel of the same dimensions. The scantlings for rudders with side plates are given in Table S 3, and for single plate rudders in Table S 3 A. The diameters of rudder heads for steam vessels to be calculated by the following formula, but in no case is the diameter to be less than that given in Table S 3.

$$d = \frac{1}{32} \sqrt[3]{\text{D} \times \text{b} (2 \text{B} - \text{b}) \times \text{S}^2}$$

where d = diameter of rudder head in inches, D = feet draught, B = the greatest distance in inches from the centre of pintles to back of rudder, b = the greatest breadth of the rudder in inches and S = speed in knots.

- 2. Forged rudder frames are to be of the best hammered iron or steel. Suitable stops for the rudder should be securely fastened to the deck in way of the tiller or quadrant tiller, together with stops on the rudder and rudder post. The stops of the steam steering engines should be fitted at a smaller angle of rudder than the deck stops, so as to prevent excessive strains consequent on a rudder being forced against its stops. The frame and main piece of side plate rudders must be forged in one piece and stayed at intervals corresponding with the pintles. The side plates to be of the thickness given in Table S 1 for the lower half of bulkheads, and, where practicable, should be in one length. The side plates to be countersunk and the rivets to have full heads and points. It is recommended that the pintles be made independent of the frame. The pintles should be spaced not more than 4 feet to 5 feet 6 inches, centre to centre, and the top pintle should be as near as practicable to the rudder trunk. Side plates should be secured to rudder frame with rivets of not less size than those required for the upper edge of the garboard strake amidships, and be spaced not more than five diameters from centre to centre.
- 3. Solid cast steel rudders of approved manufacture, and satisfactorily tested, will be admitted, if the particulars of such rudders, in the first instance, be submitted to and approved by the Committee.
- 4. Single plate rudders for steam vessels to have the scantlings and the spacing of the arms in accordance with Table S 3 A. The main piece to have a straight taper from below the top pintle where the sectional area is to be not less than that of the rudder head, to the heel where it is to be of the size required. The arms to be fitted alternately on opposite sides of the plate. A vertical groove in depth equal to the thickness of the plate, but not to exceed one inch, to be formed in the main piece to receive the fore edge of the plate, except in those cases where the arm fillets have a radius equal to half the distance between the arms, when the groove may be dispensed with. Fillets to arms forged or cast on the main piece not to have a less radius than one-fifth the distance between the arms. The rudder head may be secured to the lower part of the rudder by means of a keyed and bolted coupling provided the arrangements proposed be submitted to and approved by the Committee.
- 5. In a sailing vessel the diameter of the rudder head required by Table S 3 is to regulate the scantlings for a single plate rudder, and these scantlings are to be in accordance with Table S 3A requirements for rudder heads of the same diameter.
- 6. The depth of rudder gudgeons not to be less than seven-tenths of the diameter of the rudder head, and the thickness one-half the diameter of the pintles.
- 7. Vessels which have not two independent steering gears are to have spare tiller and gear ready for use when required.
- 8. Where combined hand and steam steering gear is adopted, and in which both gears depend upon the efficiency of a keyed quadrant or tiller, independent means of steering must be provided.
- 9. Steamers above 250 feet in length are to be fitted with steam steering gear in addition to hand steering gear, and it is recommended that the two controlling wheels for the same should be placed one at the gear and the other on the navigating bridge.
- 10. In steamers above 250 feet in length, the after steering wheel and gear are to be protected by a substantially constructed iron or stepl deck house or hood.
 - 11. Springs or buffers are to be fitted to all steam steering gear of steamers.

- 2. When scuttles are fitted for ventilation in the topsides of vessels, strong covers for them are to be provided; these covers to be efficiently fitted, to the approval of the Surveyors.
- 3. Where scuttles are fitted in the sheerstrake within three-fifths of the vessel's length amidships, compensation is to be given either by an extra thickness in the sheerstrake, doubling plate in way of the scuttles, or else by the introduction of strong angle bars over them.

CHAIN PLATES.

Section 33. The chain plates to be in proportion to the size of the vessel, and riveted efficiently to the outside plating (not bulwark plating), the sheerstrake being preferable.

BITTS.

Section 34. All bitts, when not of steel or iron, and which do not go down to the deck below, to be fitted into proper sockets fastened through the deck to plates riveted to the beams.

CEMENT.

- Section 35. 1. The frames and plating of the bottom of all vessels to the upper parts of the bilges to be thickly and efficiently covered with Portland or other approved cement, which may be mixed with sand or other suitable substance. Care to be taken to have a proper substance of cement at its termination, and to keep the watercourses clear all fore and aft. The whole to be to the satisfaction of the Surveyors.
- 2. Where asphalt, enamel cement, or similar compositions are to be used, the same must be sanctioned by the Owners, and samples are to be submitted for the approval of the Committee.
- 3. The condition of such compositions is to be ascertained by the Society's Surveyors biennially, and vessels coated with compositions as above described will be distinguished with a record of "Asp." in the Register Book.

RUDDERS AND STEERING GEARS.

Section 36. 1. Rudders to be made to ship and unship while the vessel is afloat. The scantlings of a rudder to be regulated by the number which governs the thickness of the vessel's plating, except in a spar-deck vessel, where the number for rudder scantlings is to be taken as for a three-deck vessel of the same dimensions. The scantlings for rudders with side plates are given in Table S 3, and for single plate rudders in Table S 3 A. The diameters of rudder heads for steam vessels to be calculated by the following formula, but in no case is the diameter to be less than that given in Table S 3.

$$d = \frac{1}{32} \sqrt[3]{\text{D} \times \text{b} (2 \text{B} - \text{b}) \times \text{S}^2}$$

where d = diameter of rudder head in inches, D = feet draught, B = the greatest distance in inches from the centre of pintles to back of rudder, b = the greatest breadth of the rudder in inches and S = speed in knots.

- 2. Forged rudder frames are to be of the best hammered iron or steel. Suitable stops for the rudder should be securely fastened to the deck in way of the tiller or quadrant tiller, together with stops on the rudder and rudder post. The stops of the steam steering engines should be fitted at a smaller angle of rudder than the deck stops, so as to prevent excessive strains consequent on a rudder being forced against its stops. The frame and main piece of side plate rudders must be forged in one piece and stayed at intervals corresponding with the pintles. The side plates to be of the thickness given in Table S 1 for the lower half of bulkheads, and, where practicable, should be in one length. The side plates to be countersunk and the rivets to have full heads and points. It is recommended that the pintles be made independent of the frame. The pintles should be spaced not more than 4 feet to 5 feet 6 inches, centre to centre, and the top pintle should be as near as practicable to the rudder trunk. Side plates should be secured to rudder frame with rivets of not less size than those required for the upper edge of the garboard strake amidships, and be spaced not more than five diameters from centre to centre.
- 3. Solid cast steel rudders of approved manufacture, and satisfactorily tested, will be admitted, if the particulars of such rudders, in the first instance, be submitted to and approved by the Committee.
- 4. Single plate rudders for steam vessels to have the scantlings and the spacing of the arms in accordance with Table S 3 A. The main piece to have a straight taper from below the top pintle where the sectional area is to be not less than that of the rudder head, to the heel where it is to be of the size required. The arms to be fitted alternately on opposite sides of the plate. A vertical groove in depth equal to the thickness of the plate, but not to exceed one inch, to be formed in the main piece to receive the fore edge of the plate, except in those cases where the arm fillets have a radius equal to half the distance between the arms, when the groove may be dispensed with. Fillets to arms forged or cast on the main piece not to have a less radius than one-fifth the distance between the arms. The rudder head may be secured to the lower part of the rudder by means of a keyed and bolted coupling provided the arrangements proposed be submitted to and approved by the Committee.
- 5. In a sailing vessel the diameter of the rudder head required by Table S 3 is to regulate the scantlings for a single plate rudder, and these scantlings are to be in accordance with Table S 3A requirements for rudder heads of the same diameter.
- 6. The depth of rudder gudgeons not to be less than seven-tenths of the diameter of the rudder head, and the thickness one-half the diameter of the pintles.
- 7. Vessels which have not two independent steering gears are to have spare tiller and gear ready for use when required.
- 8. Where combined hand and steam steering gear is adopted, and in which both gears depend upon the efficiency of a keyed quadrant or tiller, independent means of steering must be provided.
- 9. Steamers above 250 feet in length are to be fitted with steam steering gear in addition to hand steering gear, and it is recommended that the two controlling wheels for the same should be placed one at the gear and the other on the navigating bridge.
- 10. In steamers above 250 feet in length, the after steering wheel and gear are to be protected by a substantially constructed iron or steel deck house or hood.
 - 11. Springs or buffers are to be fitted to all steam steering gear of steamers.

12. The diameters of steering chains and rods are to be as given in Table S 3B for the various diameters of rudder heads and the corresponding radii of quadrant tillers. Where the radius of quadrant or tength of tiller adopted differs from that given in the Table, the diameter of steering chain is to be calculated from the following formula:—

$$d = .38\sqrt{\frac{D^3}{R}}$$

where d = diameter of chain in inches;

D = diameter of rudder head in inches according to Table for rudder heads.

R = radius of quadrant or length of tiller at the centre of the chain in inches.

- 13. The steering rods are to be one-fourth larger in diameter than the chain or of the corresponding diameter given in the Table for the chain required.
- 14. The sizes of the tillers or quadrant tiller arms are to be as given in Table S 3B, or of equivalent strength.
- 15. Care should be taken that the leads of the steering chains are made as direct as possible, sharp nips or bends being avoided.
- 16. The diameters at the centre of the chain of leading block sheaves are not to be less than sixteen times that of the steering chains, and the pins of the sheaves are not to be less than twice the diameter of the chains.
- 17. The tests of cast steel rudders, steering quadrant and tillers, to be as follows:—A tensile test is to be made on a piece taken from each casting, and the extension on a length of 8 inches is not to be less than 8 per cent., and the tensile strength not less than 28 tons, nor more than about 35 tons per square inch. A cold bending test also to be made corresponding to each tensile test, and the sample to be one inch square, and to bend cold before fracture through an angle of at least 90°.
- 18. The rudders, steering quadrant and tillers, to be dropped on hard ground from a height of from 7 to 10 feet, according to the design, shape, and weight of the casting. The casting in each case to be subsequently slung up and well hammered with a sledge hammer, not less in weight than 7 lbs., to satisfy the Surveyors that the castings are sound and without flaws existing either originally or developed as the result of the application of the preceding percussive tests.

WINDLASS AND HAWSE-PIPES.

- Section 37. 1. The windlass, for all grades, if of wood, may be composed of any of the following timbers; namely, English, African, or Live Oak; Adriatic, Italian, Spanish, Portuguese or French Oak; East India Teak, Morung Saul, Greenheart, Morra, or Iron Bark. The iron or steel spindle in all cases to pass through the body of the windlass.
- 2. The hawse-pipes must be of sufficient size and thickness, and the outside flange of proper form to admit of an easy lead for the cable to the windlass or capstan.

PIIMPS.

Section 38. 1. In Steam Vessels the pumping arrangements according to the division of holds &c., to be as follows:—

- 2. Holds with double bottoms.—In the double bottom of each compartment of the hold and of engine and boiler space, a steam pump suction is to be fitted at the middle line, and one on each side to clear the tanks of water when the vessel has a heavy list. Where there is considerable rise of floor towards the ends of vessels, the middle line suction only will be required. A steam pump suction and a hand pump are also to be fitted to each bilge in each hold where there is no well. When there is a well, one or three steam pump suctions are to be fitted in the same according as there is considerable or little rise of floor, and hand pumps fitted at the bilges.
- 3. Holds without double bottoms.—Where there is considerable rise of floor, one steam pump suction and one hand pump are to be fitted in each hold. In vessels with little rise of floor, two or three steam pump suctions and at least one hand pump to be fitted to each hold.
- 4. Engine and boiler space.—Where a double bottom extends the whole length of engine and boiler space, two steam pump suctions are to be fitted to the bilge on each side. Where there is a well one steam pump suction should be fitted in each bilge and one in the well. Where there is no double bottom in the machinery space, centre and wing steam pump suction should be fitted. The rose box of the bilge injection is to be fitted where easily accessible, and is to be used for bilge water only. The main and donkey pumps to draw from all compartments, and the donkey to have also a separate bilge suction in the engine room.
- 5. Fore and After Peaks.—If the Peaks are fitted as water ballast tanks, a separate steam pump suction is to be led to each. If not used for water ballast, an efficient pump is to be fitted in the fore peak. If the after peak is used as a ballast tank, no sluice valve or cock is to be fitted to the after bulkhead; but if it is not so used, and if no pump is fitted in it, a sluice valve or cock is to be fitted to the after bulkhead, to allow water to reach the pumps when required.
 - 6. Tunnel.—The tunnel well is to be cleared by a steam pump suction.
- 7. All Hand Pumps to be capable of being worked from the upper or main decks above the deep load water line, the bottoms of the pump chambers are not to be more than 24 feet above the suction rose, and the pumps are to be tested by the Surveyors to ensure that water can be pumped from the limbers. The sizes of the hand pumps to be not less than those given in the following Table:—

	Hand Pumps in Holds.		
Tonnage under Upper Deck.	Diameter of Barrel.	Diameter of Tail Pipe.	
In vessels under 500 tons	Inches.	Inches.	
In vessels of 500 tons but under 1,000 tons	$4\frac{1}{2}$	$2\frac{1}{4}$	
In vessels of 1,000 tons but under 2,000 tons	5	$2\frac{1}{2}$	
In vessels of 2,000 tons and above \dots \dots \dots \dots	$5\frac{1}{2}$	$2\frac{3}{4}$	

In lieu of hand pumps in each compartment an approved fly wheel pump may be fitted if it is connected to the steam pump bilge suction pipes of these compartments.

- 8. No Sluice Valve or Cock is to be fitted to the collision bulkhead.
- 9. No Sluice Valves or Cocks are to be fitted to the engine room, or other watertight bulkheads, unless they are arranged so as to be at all times accessible.
- 10. When Sluice Valves are fitted, they are to be so arranged as to be controlled above the Load Water Line, and the rods are to be boxed in to prevent injury.
- 11. Sounding Pipes to be fitted on each side of holds and ballast tanks, and a doubling plate is to be fitted under each.
 - 12. Air Pipes to be fitted to each ballast tank as required.
- 13. All Cocks and Valves in connection with bilge and ballast suction pipes are to be fitted in places where they are at all times accessible.
- 14. The Pipes for bilge or ballast suctions are to be fitted with flanged joints in convenient lengths, so that they may be easily disconnected for clearing. In the case of cast iron suction pipes, which are not also used as tank filling pipes, or which cannot be subjected to sea pressure, spigot and faucet joints made with india-rubber rings fitted over the spigots might be adopted, except in the case of bilge suction pipes passing through ballast tanks, which should be fitted with flanged joints.
- 15. The Suction Pipes to fore and aft peaks, and to the tunnel well, should not be less than 2½ inches inside diameter, except in vessels under 500 tons under deck, in which case they may be made 2 inches.
- 16. The Bilge Injection should not be less than two-thirds of the diameter of the sea inlet to the circulating pump.
- 17. The inside diameter of other bilge suction pipes should not be less than given in the following Table:—

TONNAGE UNDER UPPER DECK.	Donkey Suction, and Hold Centre Suctions.	Wing Suctions in Holds where no Centre Suctions are fitted, and Wing Suctions in Engine Room.	Wing Suctions in Holds where Centre Suctions are also fitted.
In vessels under 500 tons	Inches.	Inches.	Inches.
" 500 tons but under 1000 tons	21/4	2	2
,, 1000 -,, 1500 -,,	21/2	21	2
,, 1500 ,, ,, 2000 ,,	3	$2\frac{3}{4}$	21
9000	$3\frac{1}{2}$	Pleasant said thou do	$2\frac{1}{2}$
" 3000 tons and above	3½	$3\frac{1}{2}$	$2\frac{3}{4}$

In cases where more than one suction to any one compartment are connected to the pumps by a single pipe, this pipe should be not less than the size required for the centre suction.

EQUIPMENT.

Section 39. 1. All vessels having masts, spars, rigging and sails, shall be required to have them maintained in good order.

2. Every ship is to be provided with anchors, cables, &c., of approved quality, tested at a public machine recognised by the Committee, in number and length as set forth in Table No. 22. (See after

page 145).

3. To entitle vessels classed A "For Channel Purposes" to the Figure 1, the equipment of Anchors and Chain Cables, &c., should be as required by Table 22, with the exception that not more than two bower anchors and one stream anchor need be supplied. The first bower anchor should be of the full weight required by the Table, and the second bower may be 15 per cent. lighter. This rule, however, applies only to vessels intended for short passages.

4. In vessels classed "For Channel Purposes" which are intended for longer voyages, such as the Queenboro'-Flushing, the Channel Islands, or the Irish Sea service, the equipment must be in accordance

with the requirements of Table 22.

5. In the cases of foreign owned vessels classed with the Figure 1, in which the chains and anchors, or part of the same, have been tested under the inspection of the Society's Surveyors at Proving Establishments out of the United Kingdom recognised by the Committee, and test certificates of the same are furnished, duly signed, by the Society's Surveyors and the Secretary, the vessel will have recorded in the Register Book the notation A.&C.P., A.P. or C.P. as the case may be. Where, however, the anchors or cable for foreign owned vessels are manufactured abroad, and test certificates are furnished setting forth that they have been tested at a Government machine, or at a machine under the control of a municipal body or a similar responsible body, but not under the inspection of a Surveyor to the Society, the record of A.&C.P., &c. will not be made in the Register Book, though such certificates will be accepted, as complying with the requirements of the Rules, for assigning the Figure 1, provided the remaining requirements of Table 22 be complied with.

6. A certificate of all chains and anchors having been tested, and of the strain applied to them, must

be produced before the ship is classed with the Figure 1.

7. The equipment as regards anchors, chains, warps, &c., is to be regulated by the number produced by the sum of the measurements in feet arising from the addition of the half moulded breadth of the vessel at the middle of the length, the depth from the upper part of the keel to the top of the upper deck beams, with the normal round up, and the girth of the half-midship frame section of the vessel, measured from the centre line at the top of the keel to the upper deck stringer plate, multiplied by the length of the vessel for a one, two, and three-decked vessel, and for a spar-decked vessel. For a vessel having a complete awning-deck, or a continuous shade deck, the equipment number is to be increased one-eighth beyond that given by the measurements defined above to the main deck.

8. For a steam vessel with a partial awning-deck, poop, top-gallant forecastle, bridge-house or a raised quarter-deck, the equipment number is to be increased beyond that for a flush or spar-decked vessel by that proportion of the addition made for a complete awning-deck which the combined length of the erections bears to the length of the vessel. Where erections are fitted upon erections in accordance with plans approved by the Committee, the equipment number is to be correspondingly increased in the same proportion.

- 9. The equipment of vessels of the Turret deck type is to be determined by the number produced by the sum of the measurements of the half breadth, half girth of midship section, and depth to normal beam line at base of Turret, multiplied by the length, and this number increased by one-sixteenth.
- 10. All vessels under 150 tons to be provided with one good boat; and every vessel of 150 tons, and above, to have a suitable number. The Surveyors are to be particular in examining and reporting the condition of the boats of all vessels.
 - 11. Anchor Cranes and Boats' Davits to be in accordance with Table 12.
- 12. The efficient state and condition of the whole of a vessel's equipment will be designated by the Figure 1 placed after the character assigned to the vessel; and in cases in which the equipment is found insufficient in quantity or defective in quality, a dash thus —, will be inserted in place of the Figure 1. In cases where the Figure 1 is expunged on account of deficiencies in the anchors or chains, the record of Lloyd's A.&C.P. or A.&C.P. will also be expunged.

REPORTS ON VESSELS.

- * Section 40. 1. The Surveyors, in submitting their Reports of vessels not already classed, are in all cases, where practicable, to forward a sketch of the midship section, and other drawings where necessary, to be furnished by the builders, with figured dimensions of the component parts marked thereon.
- 2. Builders wishing to adopt plans other than those described herein, are to submit them through the Resident Surveyors (who are to state their opinions thereon) for the Committee's consideration and approval.

"THREE-DECK" STEAM VESSELS.

- Section 41. Steam vessels not less than 17 feet depth from top of keel to the middle deck, having two or more complete decks laid and caulked, and a tier of hold beams, or extra strong beams, or web-frames and stringers or deep framing and stringers in lieu thereof, will have their scantlings determined as follows:—Such vessels to be denoted in the Register Book, "3Dks," or "2Dks3trB.," "2Dks &web frames," or "2Dks3trB.," as the case may be.
- 2. The scantlings and spacing of the frames, reversed frames and floor-plates, the thickness of bulk-heads, and diameter of pillars, are determined by the number produced by the deduction of seven feet from the sum of the measurements in feet arising from the addition of the half-moulded breadth of the vessel amidships, the depth from the upper part of the keel to the top of the upper deck beams, with the normal round-up, at the middle of the vessel's length, and the girth of the half-midship frame section of the vessel, measured from the centre line at the top of the keel to the upper deck stringer plate.
- 3. The scantlings of the keel, stem, sternpost; the thickness of the outside plating, keelson and stringer plates, and deck; also the scantlings of the angle bars on beam stringer plates, and keelson and stringer angles in hold, as in Tables S 2, S 3, and S 5, are governed by the number obtained by multiplying that which regulates the size of the frames, &c., by the length of the vessel.
 - 4. All the frames are to extend to the upper deck stringer plate.
- 5. The reversed frames are to extend to the upper part of the middle deck beam stringer angle, and to the upper part of the frames alternately.
- 6. The plating to be of the thickness given in Table S 2, from the keel to the gunwale; the sheer-strake to be placed at the gunwale, and the strake of plating in way of the middle deck to be an outside strake.

- 7. The upper and middle deck stringer plates to be of the breadth and thickness prescribed in Table S 5. The middle deck stringer plate to be fitted and connected to the outside plating by angles between the frames of the size given for beam stringer angles; and in addition, an inner stringer angle bar of the same size, passing continuously fore and aft, must be riveted to reversed angles on each frame, and to the stringer plate, the space between this angle bar and the outside plating, all fore and aft, to be filled in and made water-tight. Similar angle bars are to be riveted to the stringer plate, reversed frames, and outside plating at the lower deck stringer.
- 8. The butt-straps of the sheerstrake and upper and middle deck stringer plates, and of not less than three strakes of plating at the bilge to be treble riveted, for not less than half the vessel's length amidships, and otherwise as per Section 20.
- 9. In these vessels a side intercostal keelson is to be fitted and attached to the outside plating by angle bars of not less size than $3 \times 3 \times \frac{8}{20}$; but if the plating number is 21,700 and under 30,400, these angle bars to be $3\frac{1}{2} \times 3\frac{1}{2} \times \frac{9}{20}$; if of this number and above, they are to be not less than $3\frac{1}{2} \times 3\frac{1}{2} \times \frac{10}{20}$. When a double bottom is fitted, this keelson may be dispensed with in the range thereof.
- 10. The thickness of the flat of upper deck is to be as given in Table S 3. In all cases a middle deck is to be properly laid and caulked, the thickness of which may be one half inch less than that prescribed for the upper deck.
- 11. Engine-room hatchways on the middle deck are to be enclosed by steel or iron trunk bulkheads, efficiently strengthened, and extended from the middle deck to the upper deck, as prescribed in Sec. 29.
- 12. If in such vessels the length exceeds eleven times the depth taken from the upper part of the keel to the top of the middle deck beams, additional strength will be required at the bilge and bottom, as per Table S 6; but no additional strength at the sheerstrake and stringer plate will be needed until the length exceeds eleven times the depth taken from the upper part of the keel to the top of the upper deck beams; when this is the case, additional strength will be required in the upper deck sheerstrakes and stringers, as per Table S 6 relating to vessels' proportions.
- 13. In steam vessels requiring by Table S 5 to have not more than one steel deck, and in which the scantlings, &c., are not less than those required by the foregoing Rules for 3 deck vessels, the wood middle deck may be dispensed with, subject to an addition (to be approved by the Committee), being made to the freeboards required by the Load Line Act for ordinary 3 deck vessels, which have the middle deck laid: the freeboards thus assigned by the Committee to be marked on the vessels' sides, inserted in the certificate of classification, and recorded in the Register Book. Such vessels will be classed in the Register Book 'with freeboard,' and the record of decks, &c., will be 1 Dk. (Stl.) 2 tr. B. & web frames or deep framing, 3 deck rule.

If it is desired to compensate for the omission of the wood middle deck, and to retain the normal freeboard, the frames and reverse frames only are to be regulated by the measurements taken to the upper deck without the deduction of 7 feet, and all the reverse frames are to be extended to the upper deck, or increased width or thickness of stringers, or other suitable compensation in lieu thereof, may be submitted for the Committee's approval.

SPAR-DECKED STEAM VESSELS.

Section 42. 1. Vessels noted in the Register Book as "Spar-deck" are those which are of lighter construction* than vessels built under the "Three deck" rule having the same dimensions, taken with reference to the total depth of the spar or upper deck in either case.

- 2. They must have three tiers of beams and be not less than 17 feet depth from top of keel to the main deck. The Committee, however, will approve of the construction of Spar-deck vessels having a somewhat less depth of hold provided the plans be in the first instance submitted for approval. For such vessels having less than 17 feet depth from top of keel to the main deck, a minimum freeboard must also be submitted to the Committee for approval, and the freeboard sanctioned is to be inserted in the Certificate and in the Register Book, and marked on the ship's sides.
- 3. In cases where erections are required on the spar deck, plans must be submitted showing the additional strengthening proposed, which must be to the satisfaction of the Committee.
- 4. In such vessels the scantlings and arrangements are to be regulated by the dimensions under the main deck, as in those having one or two decks.†
 - 5. All the frames must extend to the spar-deck stringer plate.
- 6. The reversed angle bars on the frames are to extend to the upper part of the main deck beam stringer angle, and to the upper part of the frames, alternately.
- 7. The main and spar deck sheerstrakes, and the plating between them, to be in thickness as prescribed in Table S 2. The riveting of the butts of the plating between these sheerstrakes to be regulated by Section 19, paragraph 11, and Section 20.
- 8. A reduction of $\frac{1}{20}$ of an inch from the thickness required by the upper line of Table S 5 for stringer and tie-plates will be allowed for those of the spar deck.
- 9. The butt-straps of the spar and main deck sheerstrakes and stringer plates, and of not less than three strakes of plating at the bilges, to be treble riveted for at least half the vessel's length amidships, and otherwise as per Section 20.
- 10. In these vessels a side intercostal keelson is to be fitted and attached to the outside plating by angle bars of not less than $3 \times 3 \times \frac{8}{20}$; but if the plating number is 21,700 and under 30,400 these angle bars to be $3\frac{1}{2} \times 3\frac{1}{2} \times \frac{9}{20}$; if of this number and above, they are to be not less than $3\frac{1}{2} \times 3\frac{1}{2} \times \frac{10}{20}$. When a double bottom is fitted, this keelson may be dispensed with in the range thereof.
- 11. The lower edge of the main sheerstrake must not be more than one-half its depth below the main-deck stringer plate.
- 12. The main-deck stringer plate is to be fitted and connected to the sheerstrake by angle bars between the frames, of the size given for beam stringer angle bars, and in addition, an inner stringer angle bar of the same size, passing continuously fore and aft, must be riveted to reversed angle bars on each frame, and to the stringer plate; the space between this angle bar and the sheerstrake, all fore and aft, to be filled in and made water-tight. Similar angle bars are to be riveted to the stringer plate, reversed frames, and outside plating at the lower deck.
- * This does not necessarily imply that the vessel is of less strength in relation to the amount of dead-weight carried at a suitable load-line.
- † Where the height between the main and spar-deck stringers at the sides is 8 feet or above at any part, additional transverse strength will be required to the satisfaction of the Committee.

- 13. These vessels are to have a complete main deck $3\frac{1}{2}$ inches in thickness, laid and caulked.
- 14. The flat of spar deck to be not less than $3\frac{1}{2}$ inches in thickness.
- 15. Engine-room hatchways on the main deck are to be enclosed by steel or iron trunk bulkheads, efficiently strengthened and extended from the main deck to the spar deck. (See Section 29.)
- 16. The diameters of rudder head and pintles to be regulated by the number which regulates the plating of a three deck vessel of the same dimensions. (See also Section 36.)
- 17. The measurement of depth, for regulating the additional strength required for vessels of extreme proportions, is to be taken from the upper part of keel to the top of the main deck beams.
- 18. When Table S 6 applies to these vessels, the increased strength defined for sheerstrakes is to be added to those of either the spar or main deck.
- 19. They are to have extra strength at the bilge and bottom in the proportion of their length to depth from main deck as prescribed in Table S 6; they may, however, be 13 and under 14 depths in length before they are required to have the remaining extra strength prescribed for vessels of 11 to 12 depths in length, and such vessels exceeding the above proportions to have extra strength in the same relation to that prescribed for one and two-decked vessels. In no case will the material at the upper part and the number and thickness of steel or iron decks be required to be greater than that of the three-deck vessel of the same dimensions.
 - 20. Vessels to which this rule applies will be noted in the Register Book thus :—" Spar dk."
- 21. In spar decked steam vessels, requiring by Table S 5 to have not more than one steel deck, the wood main deck may be dispensed with, provided the beams, frames, and reversed frames be of the sizes required by the "Three Deck Rule," and all the reversed frames be extended to the spar deck.
- 22. Such vessels will be classed in the Register Book with freeboard and the freeboard assigned will be inserted in the certificate of classification, and recorded in the Register Book. The record of decks, &c., will be "Spar Deck (Stl)," "2 trs. B" and "Web Frames" or "Deep Framing."

AWNING DECKED STEAM VESSELS.

Section 43. 1. An awning-decked vessel is one having a comparatively light superstructure fore and aft on the main deck proper of the vessel, intended to shelter passengers or cattle, or for the conveyance of cargo either light in its nature or limited in quantity. In such vessels the scantlings and arrangements of the frames, reversed frames, the thickness of bulkheads, and diameter of pillars in Table S 1, are to be regulated by the dimensions under the main deck, as in a one or two-deck vessel, exclusive of the awning-deck.

It is a condition on which an awning or partial awning-decked vessel is classed in the Society's Register Book that the freeboard assigned shall be marked on the vessel's sides as hereafter described.* If the vessel proceed to sea with a less freeboard than that approved by the Committee, or if the freeboard mark be placed higher than the position assigned by the Committee, the vessel will be liable to have her class expunged from the Register Book.

2. The plans of such vessels and a minimum freeboard must be submitted to the Committee for approval, and the freeboard thus sanctioned is to be inserted in the Certificate and in the Register Book, and marked on the ship's sides.*

See Notice of Freeboard requirements printed at end of Rules.

- 3. In all such cases, if the vessel has for any reason forfeited her character, the freeboard assigned as a condition of classification will be omitted in reprinting the Register Book, unless the character be previously reinstated.
- 4. Vessels to which this rule applies, as regards an entire awning deck, will be noted in the Register Book thus, "Awng dk."
- 5. Such erections only as are necessary for navigating these vessels will be allowed on the awning deck, unless plans are submitted to, and approved by, the Committee.
- 6. All the main frames must extend to the awning-deck stringer plate, or to the lower part of the curve when of a rounded form at the gunwale. To be of the size given in Table S 1, but in no case to be less than $3\frac{1}{2} \times 3 \times \frac{6}{20}$.
- 7. The whole of the reversed frames are to be extended to the top of the main-deck stringer angle bar.
 - 8. All the side plating above the main sheerstrake to be not less than as given in Table S 2.
- 9. The awning-deck stringer plate to be of the breadth given in Table S 5 for hold beam stringers and of the following thicknesses, namely:—

In vessels whose plating number is under 13,000, not less than $\frac{6}{20}$ of an inch.

"	13,000 ar	nd und	er 18,000,	"	$\frac{7}{20}$	"
"	18,000	"	24,000,	"	$\frac{8}{20}$	"
,,,	24,000	"	31,000,	, ,,	$\frac{9}{20}$	"

When the number for plating exceeds 31,000, or the vessel exceeds thirteen depths in length to the main deck, special arrangements must be made for affording the requisite longitudinal strength at the gunwale to the satisfaction of the Committee.

- 10. The tie-plates to be of the same thickness as given above for the stringer plates, and to be in breadth as in Table S 5 for main deck tie-plates.
- 11. The butts of the awning-deck side plating above the main deck, and of the awning-deck stringer and tie plates, are to be double riveted.
- 12. A reduction of one-fourth from the thickness prescribed for the main deck will be allowed for the flat of awning-deck.
- 13. The beams to be of the sizes given in Table S 4. They are to be placed at every alternate frame, and, if the vessel is of a rounded form at the gunwale, to scarph the main frames not less than eighteen inches, and to be properly riveted to them. For diameters of pillars see Tables S 1A and S 1B.
- 14. These vessels are to have a complete main deck laid and caulked, and coamings and hatches fitted as to a weather deck.
- 15. Engine-room hatchways on the main deck are to be enclosed by steel or iron trunk bulkheads, efficiently strengthened and extended from the main deck to the awning-deck. (See Section 29.)
- 16. Rounded gunwale plating to be not less in thickness than required for the awning-deck stringer plate, and to have a gunwale angle bar of the size required by Table S 3.
 - 17. The gunwale must be properly constructed to the satisfaction of the Surveyors.
- 18. The main-deck stringer plate is to be fitted and connected to the sheerstrake by angle bars between the frames, of the size given for beam stringer angles; and, in addition, an inner stringer angle

bar of the same size, passing continuously fore and aft, must be riveted to reversed angles on each frame, and to the stringer plate; the space between this angle bar and the sheerstrake, all fore and aft, to be filled in and made water-tight.

POOPS, FORECASTLES, AND BRIDGE-HOUSES.

- Section 44. 1. In full poops, forecastles, and bridge-houses, a reduction of one-fourth from the dimensions which would be required in the same range if the vessel were flush-decked (exclusive of additions for extreme proportions) will be allowed in the outside plating, stringer and tie-plates upon beams, angle bars or stringer plates, and flat of deck. The side plating need not exceed the thickness required for awning-decked vessels. The butts to be double riveted.
- 2. All frames to extend to the poop or forecastle stringer plate, or to the lower part of the curve when of a rounded form at the gunwale, and a continuous angle bar of the size given for the lower deck stringer angle is to be wrought on the upper deck stringer plate inside the frames, as prescribed in Section 16, paragraph 7. The beams to be of the size given in Table S 4, and they are to be efficiently pillared. A beam to be placed at every alternate frame to scarph the main frames not less than eighteen inches, and to be properly riveted to them.
- 3. The rounded gunwale plating may be of the thickness required for the poop or forecastle stringer plates. The gunwale must be properly constructed to the satisfaction of the Surveyors.
- 4. Bulkheads at the fore end of all bridge houses and of poops extending over engine and boiler, or other deck openings, to be of the thickness of their side plating, with coaming plates $\frac{1}{20}$ of an inch thicker than their bulkheads, and to be stiffened with bulb plates of not less size than those required for forecastle beams, and angles of the size required for the vessel's reverse frames, spaced 30 inches apart, and connected both to the coaming plates and to the deck plating, or to an athwartship plate on the beams both below and above, with a bracket-plate to each end of the bulb stiffener; or other equivalent strength introduced.
- 5. Bulkheads at the fore end of poops not extending over engine and boiler, or other deck openings, to be of the thickness of their side plating, with coaming plates $\frac{1}{20}$ of an inch thicker, and to be stiffened with angle bars the size of the frames spaced 30 inches apart.
- 6. The bulwark plating at the fore and after ends of the bridge to be increased in thickness and supported by bracket knees, and the freeing ports at this part should, in order to preserve a continuity of strength, have rounded corners and a substantial rim.
- 7. Where the poop exceeds one-fourth of the vessel's length, the sheerstrake is to be doubled, and the upper deck stringer plate increased in thickness in way of the break, for a length of from 20 to 30 feet, at this part, to the satisfaction of the Surveyors.
- 8. In top-gallant forecastles of vessels whose plating number is 18,000 and above, the alternate reversed frames are to extend to the forecastle deck, or a double angle stringer of the size required for reversed frames is to be fitted inside the frames midway between the upper and forecastle decks, connected at the fore-end by an efficient breasthook; or other equally efficient means of strengthening the forecastle may be adopted if approved by the Committee.
- 9. Where it is proposed to fit a poop or top-gallant forecastle to a vessel under 14 feet depth of hold, the plans are to be submitted for the consideration of the Committee.

- 3. In all such cases, if the vessel has for any reason forfeited her character, the freeboard assigned as a condition of classification will be omitted in reprinting the Register Book, unless the character be previously reinstated.
- 4. Vessels to which this rule applies, as regards an entire awning deck, will be noted in the Register Book thus, "Awng dk."
- 5. Such erections only as are necessary for navigating these vessels will be allowed on the awning deck, unless plans are submitted to, and approved by, the Committee.
- 6. All the main frames must extend to the awning-deck stringer plate, or to the lower part of the curve when of a rounded form at the gunwale. To be of the size given in Table S 1, but in no case to be less than $3\frac{1}{2} \times 3 \times \frac{6}{20}$.
- 7. The whole of the reversed frames are to be extended to the top of the main-deck stringer angle bar.
 - 8. All the side plating above the main sheerstrake to be not less than as given in Table S 2.
- 9. The awning-deck stringer plate to be of the breadth given in Table S 5 for hold beam stringers and of the following thicknesses, namely:—

In vessels whose plating number is under 13,000, not less than $\frac{6}{20}$ of an inch.

"	13,000 an	id und	er 18,000,	"	$\frac{7}{20}$. ,,
"	18,000	,,	24,000,	"	$\frac{8}{20}$	"
"	24,000	,,	31,000,	, ,,	$\frac{9}{20}$	"

When the number for plating exceeds 31,000, or the vessel exceeds thirteen dep⁺hs in length to the main deck, special arrangements must be made for affording the requisite longitudinal strength at the gunwale to the satisfaction of the Committee.

- 10. The tie-plates to be of the same thickness as given above for the stringer plates, and to be in breadth as in Table S 5 for main deck tie-plates.
- 11. The butts of the awning-deck side plating above the main deck, and of the awning-deck stringer and tie plates, are to be double riveted.
- 12. A reduction of one-fourth from the thickness prescribed for the main deck will be allowed for the flat of awning-deck.
- 13. The beams to be of the sizes given in Table S 4. They are to be placed at every alternate frame, and, if the vessel is of a rounded form at the gunwale, to scarph the main frames not less than eighteen inches, and to be properly riveted to them. For diameters of pillars see Tables S 1A and S 1B.
- 14. These vessels are to have a complete main deck laid and caulked, and coamings and hatches fitted as to a weather deck.
- 15. Engine-room hatchways on the main deck are to be enclosed by steel or iron trunk bulkheads, efficiently strengthened and extended from the main deck to the awning-deck. (See Section 29.)
- 16. Rounded gunwale plating to be not less in thickness than required for the awning-deck stringer plate, and to have a gunwale angle bar of the size required by Table S 3.
 - 17. The gunwale must be properly constructed to the satisfaction of the Surveyors.
- 18. The main-deck stringer plate is to be fitted and connected to the sheerstrake by angle bars between the frames, of the size given for beam stringer angles; and, in addition, an inner stringer angle

bar of the same size, passing continuously fore and aft, must be riveted to reversed angles on each frame, and to the stringer plate; the space between this angle bar and the sheerstrake, all fore and aft, to be filled in and made water-tight.

POOPS, FORECASTLES, AND BRIDGE-HOUSES.

Section 44. 1. In full poops, forecastles, and bridge-houses, a reduction of one-fourth from the dimensions which would be required in the same range if the vessel were flush-decked (exclusive of additions for extreme proportions) will be allowed in the outside plating, stringer and tie-plates upon beams, angle bars or stringer plates, and flat of deck. The side plating need not exceed the thickness required for awning-decked vessels. The butts to be double riveted.

2. All frames to extend to the poop or forecastle stringer plate, or to the lower part of the curve when of a rounded form at the gunwale, and a continuous angle bar of the size given for the lower deck stringer angle is to be wrought on the upper deck stringer plate inside the frames, as prescribed in Section 16, paragraph 7. The beams to be of the size given in Table S 4, and they are to be efficiently pillared. A beam to be placed at every alternate frame to scarph the main frames not less than eighteen inches, and to be properly riveted to them.

3. The rounded gunwale plating may be of the thickness required for the poop or forecastle stringer plates. The gunwale must be properly constructed to the satisfaction of the Surveyors.

4. Bulkheads at the fore end of all bridge houses and of poops extending over engine and boiler, or other deck openings, to be of the thickness of their side plating, with coaming plates $\frac{1}{20}$ of an inch thicker than their bulkheads, and to be stiffened with bulb plates of not less size than those required for forecastle beams, and angles of the size required for the vessel's reverse frames, spaced 30 inches apart, and connected both to the coaming plates and to the deck plating, or to an athwartship plate on the beams both below and above, with a bracket-plate to each end of the bulb stiffener; or other equivalent strength introduced.

5. Bulkheads at the fore end of poops not extending over engine and boiler, or other deck openings, to be of the thickness of their side plating, with coaming plates $\frac{1}{20}$ of an inch thicker, and to be stiffened with angle bars the size of the frames spaced 30 inches apart.

6. The bulwark plating at the fore and after ends of the bridge to be increased in thickness and supported by bracket knees, and the freeing ports at this part should, in order to preserve a continuity of strength, have rounded corners and a substantial rim.

7. Where the poop exceeds one-fourth of the vessel's length, the sheerstrake is to be doubled, and the upper deck stringer plate increased in thickness in way of the break, for a length of from 20 to 30 feet, at this part, to the satisfaction of the Surveyors.

8. In top-gallant forecastles of vessels whose plating number is 18,000 and above, the alternate reversed frames are to extend to the forecastle deck, or a double angle stringer of the size required for reversed frames is to be fitted inside the frames midway between the upper and forecastle decks, connected at the fore-end by an efficient breasthook; or other equally efficient means of strengthening the forecastle may be adopted if approved by the Committee.

9. Where it is proposed to fit a poop or top-gallant forecastle to a vessel under 14 feet depth of hold, the plans are to be submitted for the consideration of the Committee.

- 10. Where bridge-houses are fitted, the whole of the frames are to be extended to the height of the bridge-deck, or be connected to the stringer plates by knees and bracket-plates, and the gunwale angle bar made continuous. Where efficient partial bulkheads are fitted, the alternate frames only need extend to the height of the bridge-deck. When the frames are extended through the upper deck stringer plate there must be a continuous angle bar of the size given for lower deck stringer angles, wrought on the upper deck stringer plate, inside the frames.
- 11. Where the combined length of the poop, or raised quarter deck, and bridge-house exceeds two-fifths the vessel's length, and the plating number is 15,000 and above, the sheerstrake should be doubled for one-half the vessel's length amidships, or other equivalent strength should be added to the satisfaction of the Committee.
- 12. This additional strengthening to be given also to vessels of over 11 depths in length and whose plating number is 15,000 and above, where a bridge-house is fitted of a length equal to or exceeding one-fifth the length of the vessel.
- 13. The doubling to the sheerstrake required by paragraph 11 may be dispensed with in vessels having bridge-houses not less than two-fifths the length of the vessel, provided the bridge side plating be increased in thickness, and the upper strake treble riveted with buttstraps $\frac{1}{20}$ of an inch thicker than the plates, the bridge stringer plates be increased in breadth and thickness, a $\frac{5}{16}$ iron or $\frac{6}{20}$ steel bridge-deck be fitted, the landing edges of bridge side plating be double riveted and the main sheerstrake be doubled at the ends of the bridge house with plates 18 to 20 feet long. The thickness of bridge side plating and stringer plates to be as follows, and the bridge stringer angles of the size required for lower deck stringer angles:—

Plating numbers.	Bridge Sheerstrake.	Bridge Side plating.	Bridge Stringer plates.
Under 15,000	$36 \times \frac{8}{20}$	<u>8</u>	$36 \times \frac{8}{20}$
15,000 to 18,000	$36 \times \frac{9}{20}$	$\cdots \cdots \frac{8}{20} \cdots \cdots$	$36 \times \frac{8}{20}$
18,000 to 21,000	$36 \times \frac{10}{20}$	9	$38 \times \frac{9}{20}$
21,000 to 24,000	$36 \times \frac{10}{20}$	9	$40 \times \frac{10}{20}$
24,000 to 27,000	$36 \times \frac{11}{20}$	9	$40 \times \frac{10}{20}$

RAISED QUARTER-DECKS AND SUNK FORECASTLES. (See Sketches on page 140.)

Section 45. 1. Side plating of raised quarter-decks and sunk forecastles may be $\frac{1}{20}$ of an inch less in thickness than topside plating below it if the topside plating be $\frac{7}{20}$ of an inch in thickness or more.

- 2. The frames in all cases, and the reversed angles on alternate frames, are to extend to the raised quarter-deck and forecastle stringer plate.
- 3. The upper deck sheerstrake is to extend to the stern. The front or break bulkhead of the raised quarter-deck is to be stiffened by an athwartship plate, of not less size than the upper deck beam tie-plates, and efficiently connected to it by angle bars; this athwartship plate is to receive the deck ends, and is to be supported by bracket plates when not riveted to a beam.
- 4. The number and arrangement of hold beams, beam stringers, and stringers in hold, in way of raised quarter-decks, must be in accordance with the Rules for the increased depth of the vessel, and the height of the reversed angles on the frames is to be regulated by the number for

scantlings which the increased depth would give. The main sheerstrake to be doubled for a reasonable distance before and abaft the break. Where, however, the raised quarter-deck is connected to a bridge-house, it is preferred that in lieu of this, the raised quarter-deck side plating should be doubled at the break for the same length. Should the raised quarter-deck side plating not be doubled, it must be increased in thickness at the break, in addition to the sheerstrake being doubled. The bulwark plate of the raised quarter-deck adjoining the bridge side plating to be increased in thickness, and the sheerstrake doubled at front of bridge. The butts of the side plating and stringers at these parts to be carefully arranged, and the butts of the raised quarter-deck side plating, main sheerstrake, and the strake of plating next below, are to be treble riveted in the neighbourhood of the break, and the butt-straps increased in thickness. The main deck stringer plate is to extend abaft the break about seven frame spaces and the raised quarter-deck stringer plate about four frame spaces before the break and the stringer plates below the main deck are to have a shift of about 16 feet overlap; the bridge stringer also is to extend abaft the break. The size of beams of raised quarter-decks to be regulated as prescribed in Table S 4 and S 4A.

- 5. In such vessels, of extreme proportions requiring by Table S 5 a steel deck, or part steel deck, where the raised quarter-deck is of considerable length, the main deck plating is to scarph the raised quarter-deck for a length of two to three frame spaces according to the size and proportions of the vessel. There are to be from four to five diaphragm plates of the thickness of the main deck plating, connecting the two decks, and attached to the bulkhead and decks by double angles and stiffened by an angle on the after edges. The raised quarter-deck side plating is to be doubled at this part for a length of 18 to 20 feet.
- 6. Web plates not less than 15 inches deep to be fitted on the fore side of the bulkhead in way of the diaphragm plates, efficiently bracketed to the main and bridge deck plating.
- 7. Where the plating number is 24,000 and under 26,000, the main and raised quarter decks are to be scarphed four frame spaces, and where the plating number is 26,000 and above, five frame spaces. The webs on the fore side of the break bulkhead are to be not less than 18 inches deep. In such vessels the raised quarter-deck side plating is to be doubled, commencing at one-fourth the length of the vessel from the stern and extending to 8 feet beyond the break of the raised quarter-deck.
- 8. The break bulkhead to be of the thickness of the bridge side plating, and stiffened with angles of the size of the frames spaced 30 inches apart.
- 9. Where the plating number exceeds 20,000, or the vessel is over 13 depths to length, the break bulkhead is to be not less than four frame spaces abaft the after end of the engine room opening.
- 10. Vessels which from their size and proportions do not require the decks to be scarphed, are to have from four to five bracket knees fitted on each side of the break bulkhead, the thickness of which is not to be less than that of the main deck plating.
- 11. The raised quarter-deck plating should be attached to the break bulkhead by double angles of not less size than that given in Table S 3 for middle deck stringer angles.
- 12. Where the combined length of the poop or raised quarter-deck and bridge-house exceeds two-fifths the vessel's length, and the plating number is 15,000 and above, the sheerstrake to be doubled for one-half the vessel's length amidships, or other equivalent strength added, to the satisfaction of the Committee.

VESSELS OF EXTREME PROPORTIONS.

- Section 46. 1. Additional longitudinal strength, beyond that stated in the foregoing rules, and in Tables S 2, S 3, and S 5, will be required for vessels of extreme proportions, as shown in Table S 6.
 - 2. The length, breadth, and depth to be taken as per Section 1.
- 3. For all vessels exceeding in length sixteen depths to the middle deck*, plans must be submitted for the approval of the Committee for giving the vessels sufficient additional strength longitudinally; and all vessels having a length of thirteen depths and above to the upper deck, are to have a substantial erection extending over the midship half length of the vessel.
- 4. In all cases where keelsons, or other additions, are required for a certain portion of the length of a vessel, care should be taken to avoid any abrupt termination of this additional strength by tapering the keelsons, &c., beyond these limits, and properly shifting their terminations.

VESSELS NOT BUILT UNDER SURVEY.

- Section 47. 1. In cases of vessels not surveyed while building, for which a character may be required, application must be made to the Committee in writing, and such drawings, with scantlings of the vessel marked thereon, as may be obtainable, should be furnished, also particulars of the testing of the steel used in the construction of the vessel. The Committee will then direct a special examination to be made by two Surveyors of the Society (one of whom shall be an exclusive officer), for which purpose the vessel is to be placed on high blocks in a dry dock or on ways; the hold to be cleared and proper stages made; the rivets and plating of keel, and flat of bottom, thoroughly examined; the close ceiling in the hold to be removed where deemed necessary, but in no case less than required for Special Survey No. 2. The coal bunkers of steam vessels to be cleared; the whole of the frames, stringers, hooks, floor-plates, keelsons, engine and boiler bearers, ends of beams, water-tight bulkheads, rivets, and inner surface of the plating exposed to view;† all oxidation to be removed by being cut or beaten off the several parts above named, also from the outside plating, rivets, keel, stem, stern-post, and rudder.
- 2. When the vessel is so prepared, the Surveyors are to ascertain the scantlings of the various parts, and verify the particulars given on the drawings furnished, drilling the shell plating where deemed necessary for this purpose. A few rivets are to be removed from various parts to ascertain their quality and the character of the countersinking and workmanship. A full report is to be made on a first entry report form for the information of the Committee, who will then assign the vessel such character as the facts may appear to them to warrant.
- 3. In addition to the above, if the age of the vessel be ten years or upwards, the requirements of the Special Survey No. 3 are to be complied with. The periodical surveys are subsequently to be held as in the case of vessels built under survey.
- *All vessels, excepting those with an awning deck, whose plating number exceeds 35,000 and exceeding 16 depths in length, taken from the main deck, are to have the whole of the reversed frames extended to the gunwale for half the vessel's length amidships, or a sufficient number of partial bulkheads fitted in the 'tween decks to the approval of the Committee. In the case of awning-decked vessels, they are all to extend to the main deck.
- † In cases where the inner surface of the bottom plating is coated with cement or asphalte, if the coating be carefully inspected, and tested by beating or chipping and found sound and adhering satisfactorily to the steel, its removal may be dispensed with, provided that upon the removal of a portion, the plating, frames, and rivets under it be found in satisfactory condition.

4. In steam vessels the Engines and Boilers are to be opened out for Survey, at least to the extent required for the Special Surveys Nos. 1, 2, and 3. The Screw Shaft is to be drawn and examined. The arrangements of sea cocks, bilge suctions, valves, etc., are to be made to conform to the requirements of the Rules, and the working pressure of the boilers is to be determined from their actual scantlings in accordance with the Rules for the construction of boilers, and particulars should be furnished respecting the testing of the steel.

By order of the Committee,

A. G. DRYHURST,

Secretary.

No. 2, White Lion Court, Cornhill, London, E.C. 26th April, 1900.

And the control of th

20. 2, 18160 interiori, 1901/11, Leaten, 4.6. 2884 A est 1000.

Engi

Li

U

Oi st

RULES

FOR THE

SURVEY AND CONSTRUCTION OF ENGINES AND BOILERS OF STEAM VESSELS.

1. In steam vessels, the machinery and boilers are to be inspected throughout construction, the boilers tested by hydraulic pressure, and the machinery tested under steam by the Society's Engineer-Surveyors, who will furnish a report to the Committee describing them in the manner shown in form No. 8. If found satisfactory, the Committee will thereupon grant a certificate, and insert in the Register Book the notification, "LMC" in red (i.e. "LLOYD'S MACHINERY CERTIFICATE"), indicating that the machinery and boilers are certified to be in good order and safe working condition.

SPECIAL SURVEY OF NEW ENGINES OR BOILERS.

- 2. In steam vessels built under Special Survey, the Machinery and Boilers must also be constructed under Special Survey.
- 3. In cases of machinery or new boilers being built under Special Survey, the distinguishing mark will be noted in red, thus: "**HLMC," or "**NE & B," or "**NB."
- 4. In order to facilitate this inspection, the plans of the machinery and boilers are to be examined and from them the working pressure fixed.
- 5. The Surveyors are to examine the materials and workmanship from the commencement of the work until the final test of the machinery under steam; any defects, &c., to be pointed out as early as possible.
- 6. The Surveyors may also, if desired, compare the work as it progresses with the requirements of the specification agreed upon by the parties concerned, and certify to the conditions thereof, as far as can be seen, being satisfactorily complied with.

BOILERS.

- 7. The Surveyors will be guided in fixing the working pressure by the tables and formulæ annexed. (See paragraph 41.)
 - 8. Any novelty in the construction of the machinery or boilers to be reported to the Committee.
 - 9. The boilers, together with the machinery, to be inspected at different stages of construction.
- 10. The boilers to be tested by hydraulic pressure, in the presence of the Engineer-Surveyor, to twice the working pressure, and carefully gauged while under test.

Line and the first transfer of the former of the first of the country of the first of the first of the country of at the heart to the profess of charges at a secretary engineer of a subject of the secretary and the secretary of the secreta

RULES

FOR THE

SURVEY AND CONSTRUCTION OF ENGINES AND BOILERS OF STEAM VESSELS.

1. In steam vessels, the machinery and boilers are to be inspected throughout construction, the boilers tested by hydraulic pressure, and the machinery tested under steam by the Society's Engineer-Surveyors, who will furnish a report to the Committee describing them in the manner shown in form No. 8. If found satisfactory, the Committee will thereupon grant a certificate, and insert in the Register Book the notification, "LMC" in red (i.e. "LLOYD'S MACHINERY CERTIFICATE"), indicating that the machinery and boilers are certified to be in good order and safe working condition.

SPECIAL SURVEY OF NEW ENGINES OR BOILERS.

- 2. In steam vessels built under Special Survey, the Machinery and Boilers must also be constructed under Special Survey.
- 3. In cases of machinery or new boilers being built under Special Survey, the distinguishing mark *\ will be noted in red, thus: "*\ HLMC," or "*\ HNE & B," or "\ HNB."
- 4. In order to facilitate this inspection, the plans of the machinery and boilers are to be examined and from them the working pressure fixed.
- 5. The Surveyors are to examine the materials and workmanship from the commencement of the work until the final test of the machinery under steam; any defects, &c., to be pointed out as early as possible.
- 6. The Surveyors may also, if desired, compare the work as it progresses with the requirements of the specification agreed upon by the parties concerned, and certify to the conditions thereof, as far as can be seen, being satisfactorily complied with.

BOILERS.

- 7. The Surveyors will be guided in fixing the working pressure by the tables and formulæ annexed. (See paragraph 41.)
 - 8. Any novelty in the construction of the machinery or boilers to be reported to the Committee.
 - 9. The boilers, together with the machinery, to be inspected at different stages of construction.
- 10. The boilers to be tested by hydraulic pressure, in the presence of the Engineer-Surveyor, to twice the working pressure, and carefully gauged while under test.

- 11. Two safety valves to be fitted to each boiler, and loaded to the working pressure in the presence of the Surveyor. In the case of boilers of greater working pressure than 60 lbs. per square inch, the safety valves may be loaded to 5 lbs. above the working pressure. If common valves are used their combined areas to be at least half a square inch to each square foot of grate surface. If improved valves are used, they are to be tested under steam in the presence of the Surveyor; the accumulation in no case to exceed 10 per cent. of the working pressure.
 - 12. An approved safety valve also to be fitted to the super-heater.
- 13. In winch boilers one safety valve will be allowed, provided its area be not less than half a square inch per square foot of grate surface.
- 14. Each valve to be arranged so that no extra load can be added when steam is up, and to be fitted with easing gear which must lift the valve itself. All safety-valve spindles to extend through the covers and be fitted with sockets and cross handles, allowing them to be lifted and turned round in their seats, and their efficiency tested at any time.
 - 15. Stop-valves to be fitted so that each boiler can be worked separately.
 - 16. Each boiler to be fitted with a separate steam gauge, to accurately indicate the pressure.
 - 17. Each boiler to be fitted with a blow-off cock independent of that on the vessel's outside plating.
 - 18. The machinery and boilers are to be securely fixed to the vessel to the satisfaction of the Surveyor.

STEEL BOILERS.

- 19. When steel is used in the construction of boilers intended for vessels classed or proposed for classification in the Society's Register Book, the boilers shall be constructed in accordance with the requirements of the Rules, and the following conditions be fulfilled.
 - 1. The material of longitudinal stays and of plates intended for the cylindrical shells of boilers is to have an ultimate tensile strength of not less than 27 and not more than 32 tons per square inch of section*. That of screw stays and of all other plates is to have an ultimate tensile strength of not less than 26 and not more than 30 tons per square inch of section. In all cases the elongation is to be not less than 20 per cent. in a length of 8 inches. Test pieces cut from the plates or bars are to be capable of being bent to a curve of which the inner radius is not greater than one and half times the thickness of the plates or bars, both when in the normal condition and after having been heated uniformly to a low cherry-red and quenched in water of 82° Fahrenheit.
 - 2. Steel rivets are to be of soft and ductile quality having a tensile strength of not less than 26 and not more than 30 tons per square inch and are to be capable of withstanding the same tests as the plates are required to undergo.
 - 3. A temper test is to be made from every plate intended to be used in the construction of boilers, and samples for tensile and cold bend tests are to be selected from each batch of plates, etc., submitted for approval, at least one of each test being taken from each cast or furnace charge from which the material has been produced. When plates are 1½ inches thick, or above, a tensile and a cold bend test are to be made from each plate.

^{*} If the shell plates are to be flanged or welded the ultimate strength is not to exceed 30 tons per square inch.

- 4. The Society's Surveyor will attend at the steel works when necessary, and select the samples for testing before the plates are sheared to size, and these samples when marked by him for testing should, as far as practicable, be followed by the Surveyor through the different stages of preparation until the tests are completed.
- 5. The Society's Surveyor will require to have every facility placed in his way for tracing all plates to their respective charges and to be furnished with two copies of the advice notes of the material, one of which, when he shall have been satisfied with the results of the test applied to the material, is to be signed and forwarded to the boiler manufacturer, and the other is to be retained by himself.
- 6. The samples are taken for testing in order that the general quality of the material may be ascertained, and if any sample should fail to fulfil the conditions laid down, the plate from which the sample is taken must be rejected; and further tests should be made before any material, made from the same cast or charge as the failing sample, can be approved.
- 7. All the holes in steel boilers should be drilled, but if they be punched the plates are to be afterwards annealed.
- 8. All plates that are dished or flanged, or in any way heated in the fire for working, except those that are subjected to a compressive stress only, are to be annealed after the operations are completed.
- 9. No steel stays are to be welded.
- 10. Unless otherwise specified, the Rules for the construction of iron boilers will apply equally to boilers made of steel.

ENGINES.

- 20. The engines are to be fitted with two feed-pumps, each capable of supplying the boilers; the pumps, &c., to be so arranged that either can be overhauled whilst the other is at work.
- 21. The engines are to be fitted with two bilge pumps, which are to be so arranged that either can be overhauled whilst the other is at work.
- 22. In engines of 70 H.P. and under, one feed-pump and one bilge-pump will be deemed sufficient, provided they are of adequate capacity.

The main feed pumps may be worked by independent engines provided they are fitted with automatic regulators for controlling their speed. If only one such pump is fitted for the main feed, the auxiliary feed pump required by paragraph 25 should also be fitted with an automatic speed regulator.

- 23. A bilge injection, or a bilge suction to the circulating pump, is to be fitted.
- 24. The engine bilge-pumps are to be fitted capable of pumping from each compartment of the vessel. The mud boxes and roses in engine room are to be placed where they are easily accessible, and to the satisfaction of the Surveyor.
- 25. A steam pump is to be provided capable of supplying the boilers with water; this pump to be provided with suctions to the hotwell and also to the sea. A steam pump is to be so fitted as to pump from each compartment, to deliver water on deck, and if no hand pump is fitted in engine room it must be fitted to be worked by hand. In small vessels in which only one steam pump is fitted, it must comply with all the requirements.

- 26. In all steam pipes provision is to be made for expansion and contraction to take place without unduly straining the pipes, and all main steam pipes are to be tested by hydraulic pressure to twice the working pressure, in the presence of the Engineer Surveyor.
- 27. All discharge-pipes to be, if possible, carried above the deep load-line, and to have discharge valves fitted on the plating of the vessel in an accessible position.
 - 28. No pipes are to be carried through the bunkers without being properly protected.
- 29. Bilge suction-pipes to be arranged to pump direct from each compartment, the roses to be fixed in places where they can be easily accessible.

SHAFTS.

- 30. All shafts are to be made of good material, are to be examined when rough turned and when finished. In the case of screw shafts scrap steel is not to be used. It is recommended that these be made of ingot steel or forged from blooms made from rolled iron bar of good fibrous quality.
- 31. Gauges of an approved description for testing the truth of the crank shafts are to be supplied with all new engines, and adjusted in the presence of the Surveyor.
- 32. The length of the stern bush is to be at least four diameters of the shaft. It is recommended that the shaft liner should be continuous the whole length of the stern tube, and that the after end should be tapered in thickness and made watertight in the propeller boss. If the liner is made in two pieces the joint should be burned. If the liner does not fit tightly at the part between the bearings in the stern tube, the space between the shaft and the liner should be charged or "forced" with a plastic material insoluble in water and non-corrosive. If two liners are used, it is recommended that they be tapered in thickness at the ends, and that the shaft should be lapped or protected between the liners. In this case, and also if no liners are used, the diameter of the shaft should be $\frac{21}{20}$ ths of that required for a shaft with a continuous liner.

For dimensions of shafts, see the formula in paragraph 59.

STEEL CASTINGS.

- 33. Steel Castings may be used for engine purposes provided they fulfil the Committee's requirements, which are as follow:—
 - 1. For purposes for which Cast Iron is ordinarily employed, such as propeller bosses and blades, bed plates, engine framing and columns, brackets, weigh-shaft levers, pistons, cylinder covers, eccentric straps, bearing bushes, &c., the castings must be sound, and are to be subjected to such drop and hammering tests as are practicable.
 - 2. For shafts or parts of shafts, and for purposes for which forgings are ordinarily employed, the material must also be subjected to the following tests:—
 - 3. A tensile test is to be made from a piece taken from each casting. The tensile strength is not to exceed 30 tons per square inch, and the elongation is not to be less than 10 per cent. in a length of 8 inches, and a cold bending test, turned to 1½ inches diameter or planed to 1½ inches square, is to be capable of being bent without fracture through an angle of 90° over a radius not greater than 1¾ inches.
 - 4. All steel castings are to be thoroughly annealed.

COCKS, PIPES, AND SEA CONNECTIONS.

- 34. With a view to insuring better control over cocks, valves, and pipes connecting the engines and boilers with the sea, they are to be fixed as follows, in all new vessels and vessels having new engines or boilers:—
- 35. All sea-cocks to be fitted on the plating of the vessel above the level of the stoke-hold and engine-room platforms, or attached to Kingston valves of a height sufficient to lift them up to the level of these platforms.
- 36. The bolts securing all cocks or sea connections to the plating of the vessel are to be tapped into the plating of the vessel or fitted with countersunk heads.
- 37. The blow-off cocks on the plating of the vessel are to be fitted with spigots passing through the plating, and a brass or gun-metal ring on the outside. The cocks are to be so constructed that the key or spanner can only be taken off when the cock is shut.
- 38. Cocks and valves connecting all suction pipes to be fixed above the stoke-hold and engine-room platforms.
- 39. The arrangements of pumps, bilge injections, suction and delivery pipes, is to be such as will not permit of water being run from the sea into the vessel by an act of carelessness or neglect. Any defective arrangement to be reported to the Committee.

SPARE GEAR.

- 40. The articles of spare gear mentioned in the following list will be required to be carried in all steam vessels classed in the Society's Register Book, viz. :—
 - 2 connecting rod or piston rod top-end bolts and nuts.
 - 2 connecting rod bottom-end bolts and nuts.
 - 2 main bearing bolts.
 - 1 set of coupling bolts.

- 1 set of feed and bilge pump valves.
- 1 set of piston springs (where common springs are used).
- A quantity of assorted bolts and nuts Iron of various sizes.

In addition to the foregoing the following articles are recommended to be carried with a view to expedite repairs and lessen delay in distant ports, viz. :-

Crank shaft.

Propeller shaft.

Propeller, or a full set of blades.

Stern bush, or lignum vitæ lining for bush.

1 pair of connecting rod brasses.

1 pair of cross head brasses.

1 set of link brasses.

1 eccentric strap complete.

Air pump rod.

Circulating pump rod.

H. P. valve spindle.

L. P. valve spindle.

1 set of check valves.

6 cylinder cover bolts.

6 junk ring bolts.

4 valve chest cover bolts.

2 dozen boiler tubes.

3 dozen condenser tubes.

1 cylinder escape valve and spring.

1 set of safety valve springs.

RULES FOR DETERMINING THE WORKING PRESSURE TO BE ALLOWED IN NEW BOILERS.

CYLINDRICAL SHELLS OF IRON BOILERS.

41. The strength of circular shells of iron boilers to be calculated from the strength of the longitudinal joints by the following formula:—

$$\frac{\mathbf{C} \times \mathbf{T} \times \mathbf{B}}{\mathbf{D}}$$
 = working pressure.

where C = co-efficient as per following table,

T = thickness of plate in inches,

D = mean diameter of shell in inches,

B = percentage of strength of joint found as follows—the least percentage to be taken.

For plate at joint
$$\mathbf{B} = \frac{\mathbf{p} - \mathbf{d}}{\mathbf{p}} \times 100$$
.

For rivets at joint $\mathbf{B} = \frac{\mathbf{n} \times \mathbf{a}}{\mathbf{p} \times \mathbf{T}} \times 100$ with iron rivets in iron plates with punched holes.

$$\mathbf{B} = \frac{\mathbf{n} \times \mathbf{a}}{\mathbf{p} \times \mathbf{T}} \times 90$$
 with iron rivets in iron plates with drilled holes.

(In case of rivets being in double shear, 1.75a is to be used instead of a.)

where p = pitch of rivets,

d = diameter of rivets,

a = sectional area of rivets,

n = number of rows of rivets.

Mem.—In any case where the strength of the longitudinal joint is satisfactorily shown by experiment to be greater than given by this formula the actual strength may be taken in the calculation.

TABLE OF CO-EFFICIENTS.

IRON BOILERS.

Description of Longitudinal Joint.	For Plates ¹ / ₂ -inch thick and under.	For Plates ³ / ₄ -inch thick and above ¹ / ₂ -inch.	For Plates above \$\frac{3}{4}\$-inch thick.	
Lap Joint, Punched Holes	155	165	170	
Lap Joint, Drilled Holes	170	180	190	
Double Butt Strap Joint, Punched Holes	170	180	190	
Double Butt Strap Joint, Drilled Holes	180	190	200	

Note.—The inside butt strap to be at least \$\frac{3}{4}\$ of the strength of the longitudinal joint.

CYLINDRICAL SHELLS OF STEEL BOILERS.

42. The strength of cylindrical shells of steel boilers is to be calculated from the following formula:-

$$\mathbf{C} \times (\mathbf{T} - 2) \times \mathbf{B}$$
 = working pressure in lbs. per square inch.

where D = mean diameter of shell in inches.

T = thickness of plate in sixteenths of an inch.

 $\mathbb{C} = 21$ when the longitudinal seams are fitted with double butt straps of equal width.

C = 20.25 when they are fitted with double butt straps of unequal width, only covering on one side the reduced section of plate at the outer lines of rivets.

 $\mathbb{C} = 19.5$ when the longitudinal seams are lap joints.

If the minimum tensile strength of shell plates is 28 or 29 tons per square inch instead of 27 tons per square inch these values of C may be correspondingly increased.

B = the least percentage of strength of longitudinal joint found as follows:—

For plate at joint
$$\mathbf{B} = \frac{p - d}{p} \times 100$$

For rivets at joint $\mathbf{B} = \frac{\mathbf{n} \times \mathbf{a}}{\mathbf{p} \times \mathbf{t}} \times 85$ where steel rivets are used.

$$B = \frac{n \times a}{p \times t} \times 70$$
 where iron rivets are used.

where p = pitch of rivets in inches.

t = thickness of plate in inches.

d = diameter of rivet holes in inches.

n = number of rivets used per pitch in the longitudinal joint.

a = sectional area of rivet in square inches.

In case of rivets in double shear 1.75a is to be used instead of a.

Note.—The inside butt strap to be at least $\frac{3}{4}$ of the strength of the longitudinal joint.

Note.—For the shell plates of superheaters or steam chests enclosed in the uptakes or exposed to the direct action of the flame, the co-efficients should be \(^2\)3 of those given in the preceding tables.

Proper deductions are to be made for openings in shell.

All manholes in circular shells to be stiffened with compensating rings.

The shell plates under domes in boilers so fitted to be stayed from the top of the dome or otherwise stiffened.

STAYS.

- 43. The strength of stays supporting flat surfaces is to be calculated from the smallest part of the stay or fastening, and the strain upon them is not to exceed the following limits, namely:—
- 44. Iron Stays.—For stays not exceeding $1\frac{1}{2}$ inches smallest diameter, and for all stays which are welded 6,000 lbs. per square inch; for unwelded stays above $1\frac{1}{2}$ inches smallest diameter, 7,500 lbs. per square inch.

- 45. Steel Stays.—For screw stays not exceeding 1½ inches smallest diameter, 8,000 lbs. per square inch; for screw stays above $1\frac{1}{2}$ inches smallest diameter, 9,000 lbs. per square inch. For other stays not exceeding 1½ inches smallest diameter, 9,000 lbs. per square inch, and for stays exceeding 1 inches smallest diameter, 10,000 lbs. per square inch. No steel stays are to be welded.
 - 46. Stay Tubes.—The stress is not to exceed 7,500 lbs. per square inch.

FLAT PLATES.

47. The strength of flat plates supported by stays is to be taken from the following formula:-

 $\mathbf{C} \times \mathbf{T}^2$ = working pressure in lbs. per square inch;

where T = thickness of plate in sixteenths of an inch,

 \mathbf{P}^2 = square of pitch in inches. If the pitch in the rows is not equal to that between the rows, then the mean of the squares of the two pitches is to be taken.

C = 90 for iron or steel plates $\frac{7}{16}$ thick and under, fitted with screw stays with riveted heads,

C = 100 for iron or steel plates above $\frac{7}{16}$ thick fitted with screw stays with riveted heads, C = 110 for iron or steel plates $\frac{7}{16}$ thick and under, fitted with stays and nuts, C = 120 for iron plates above $\frac{7}{16}$ thick, and for steel plates above $\frac{7}{16}$ and under $\frac{9}{16}$ thick, fitted with screw stays and nuts,

C = 135 for steel plates $\frac{9}{16}$ thick and above, fitted with screw stays and nuts,

C = 140 for iron plates fitted with stays with double nuts,

C = 150 for iron plates fitted with stays with double nuts and washers outside the plates, of at least $\frac{1}{3}$ of the pitch in diameter and $\frac{1}{2}$ the thickness of the plates,

C = 160 for iron plates fitted with stays with double nuts and washers riveted to the outside of the plates, of at least $\frac{2}{5}$ of the pitch in diameter and $\frac{1}{2}$ the thickness of the plates,

C = 175 for iron plates fitted with stays with double nuts and washers riveted to the outside of the plates, when the washers are at least $\frac{2}{3}$ of the pitch in diameter and of the same thickness as the plates.

For iron plates fitted with stays with double nuts and doubling strips riveted to the outside of the plates, of the same thickness as the plates, and of a width equal to 3 the distance between the rows of stays, C may be taken as 175, if P is taken to be the distance between the rows, and 190 when P is taken to be the pitch between the stays in the rows.

For steel plates, other than those for combustion chambers, the values of C may be increased as follows :-

> C = 140 increased to 175, 150 185, 160 200, 175 220, 190 240.

48. If flat plates are strengthened with doubling plates securely riveted to them, having a thickness of not less than $\frac{2}{3}$ of that of the plates, the strength to be taken from

$$\frac{\mathbf{C} \times (\mathbf{T} + \frac{t}{2})^2}{\mathbf{P}^2}$$
 = working pressure in lbs. per square inch;

where t = thickness of doubling plates in sixteenths, and C, T and P are as above.

Note.—In the case of front plates of boilers in the steam space, these numbers should be reduced 20 per cent., unless the plates are guarded from the direct action of the heat.

49. For steel tube plates in the nest of tubes the strength to be taken from

$$\frac{140 \times T^2}{P^2}$$
 = working pressure in lbs. per square inch;

where T = the thickness of the plates in sixteenths of an inch,

P = the mean pitch of stay tubes from centre to centre.

For the wide water spaces between the nests of tubes the strength to be taken from

$$\frac{\mathbf{C} \times \mathbf{T}^2}{\mathbf{P}^2}$$
 = working pressure in lbs. per square inch;

where P = the horizontal distance from centre to centre of the bounding rows of tubes, and

C = 120 where the stay tubes are pitched with two plain tubes between them and are not fitted with nuts outside the plates,

C = 130 if they are fitted with nuts outside the plates,

C = 140 if each alternate tube is a stay tube not fitted with nuts,

C = 150 if they are fitted with nuts outside the plates,

C = 160 if every tube in these rows is a stay tube and not fitted with nuts,

C = 170 if every tube in these rows is a stay tube and each alternate stay tube is fitted with nuts outside the plates.

50. The thickness of tube plates of Combustion Chambers in cases where the pressure on the top of the chambers is borne by these plates is not to be less than that given by the following rule:—

$$T = \frac{P \times W \times D}{1600 \times (D - d)}$$

where P = working pressure in lbs. per square inch.

W = width of Combustion Chamber over plates in inches.

D = horizontal pitch of tubes in inches.

d = inside diameter of plain tubes in inches.

T = thickness of tube plates in sixteenths of an inch.

GIRDERS.

51. The strength of girders supporting the tops of combustion chambers and other flat surfaces to be taken from the following formula:—

$$\frac{\mathbf{C} \times d^2 \times \mathbf{T}}{(\mathbf{L} - \mathbf{P}) \times \mathbf{D} \times \mathbf{L}} = \text{working pressure in lbs. per square inch};$$

where L = width between tube plates, or tube plate and back plate of chamber,

P = pitch of stays in girders,

D = distance from centre to centre of girders,

d = depth of girder at centre,

T = thickness of girder at centre. All these dimensions to be taken in inches.

Wrought Iron.

$$\mathbf{C} = \begin{cases} 6,000, \text{ if there is one stay to each girder.} \\ 9,000, \text{ if there are two or three stays to each girder.} \\ 10,000, \text{ if there are four or five stays to each girder.} \\ 10,500, \text{ if there are six or seven stays to each girder.} \\ 10,800, \text{ if there are eight stays or above to each girder.} \end{cases}$$

Wrought Steel.

C = 6,600, if there is one stay to each girder.
9,900, if there are two or three stays to each girder.
11,000, if there are four or five stays to each girder.
11,550, if there are six or seven stays to each girder.
11,880 if there are eight stays or above to each girder.

CIRCULAR FURNACES.

52. The strength of plain furnaces to resist collapsing to be calculated as follows:—

Where the length of the plain cylindrical part of the furnace exceeds 120 times the thickness of the plate, the working pressure is to be calculated by the following formula:—

$$\frac{1,075,200 \times \mathsf{T}^2}{\mathsf{L} \times \mathsf{D}}$$
 = working pressure in lbs. per square inch;

Where the length of the plain cylindrical part of the furnace is less than 120 times the thickness of the plate, the working pressure is to be calculated by the following formula:—

$$\frac{50 \times (300 \, \text{T} - \text{L})}{\text{D}}$$
 = working pressure in lbs. per square inch,

where **D** = outside diameter of furnace in inches,

T = thickness of plates in inches,

L = length of plain cylindrical part in inches, measured from the centres of the rivets connecting the furnaces to the flanges of the end and tube plates, or from the commencement of the curvature of the flanges of the furnace where it is flanged or fitted with Adamson rings.

53. In the furnaces referred to below the formulæ given are applicable if the steel used has a tensile strength of not less than 26 nor more than 30 tons per square inch. If the material of furnaces has a less tensile strength than 26 tons per square inch, then for each ton per square inch which the minimum tensile strength falls below 26, the co-efficient is to be correspondingly decreased by \(\frac{1}{26} \)th part.

54. The strength of corrugated furnaces made of steel, on Fox's, Morison's or Deighton's plan, ribbed furnaces on Brown's cambered plan, to be calculated from

$$\frac{1,259 \times (T-2)}{D}$$
 = working pressure in lbs. per square inch.

55. The strength of ribbed furnaces (with ribs 9 inches apart), to be calculated from the following formula:—

 $\frac{1,160 \times (T-2)}{D}$ = working pressure in lbs. per square inch.

56. The strength of spirally corrugated furnaces is to be calculated from the following formula:—

$$\frac{912 \times (T-2)}{D}$$
 = working pressure in lbs. per square inch;

where T = thickness of plate in sixteenths of an inch,

and **D** = outside diameter of corrugated or cambered ribbed furnaces, or outside diameter of the plain part of ordinary ribbed furnaces, in inches.

57. The strength of Holmes' patent furnaces, in which the corrugations are not more than 16 inches apart from centre to centre, and not less than 2 inches high, to be calculated from the following formula:—

Working pressure in lbs. per square inch=
$$\frac{945 \times (T-2)}{D}$$

where T = thickness of plain portions of furnace in sixteenths of an inch,

D = outside diameter of plain parts of the furnace in inches.

DONKEY BOILERS.

58. The iron used in the construction of the fire boxes, uptakes, and water tubes of donkey boilers shall be of good quality, and to the satisfaction of the Surveyors, who may in any cases where they deem it advisable apply the following tests:—

Thickness of	To Bend cold through an angle of								
Plates.	With the Grain.	Across the Grain.							
5	80°	45°							
6 16	70°	35°							
7 16	55°	25°							
8 1 6	40°	20°							

The material to stand bending hot to an angle of 90 degrees, over a radius not greater than 1½ times the thickness of the plates.

RULES FOR DETERMINING SIZES OF SHAFTS.

59. The diameters of intermediate shafts are to be not less than those given by the following formula :-

For Compound Engines with two cranks at right angles-

Diameter of intermediate shaft in inches = $(.04 \text{ A} + .006 \text{ D} + .02 \text{ S}) \times \sqrt[3]{\text{P}}$

For Triple expansion engines with three cranks at equal angles—

Diameter of intermediate shaft in inches= $(.038 \text{ A} + .009 \text{ B} + .002 \text{ D} + .0165 \text{ S}) \times \sqrt[3]{\text{P}}$

For Quadruple expansion engines with two cranks at right angles-

Diameter of intermediate shaft in inches=(.034**A**+.011**B**+.004**C**+.0014**D**+.016**S** $) \times \sqrt[3]{P}$

For Quadruple expansion engines with three cranks—

Diameter of intermediate shaft in inches = $(.028 \, \text{A} + .014 \, \text{B} + .006 \, \text{C} + .0017 \, \text{D} + .015 \, \text{S}) \times \sqrt[3]{P}$

For Quadruple expansion engines with four cranks-

Diameter of intermediate shaft in inches= $(.033 \, \text{A} + .01 \, \text{B} + .004 \, \text{C} + .0013 \, \text{D} + .0155 \, \text{S}) \times \sqrt[3]{\text{P}}$

where A = diameter of High Pressure Cylinder in inches,

B = diameter of first Intermediate Cylinder in inches,

C = diameter of second Intermediate Cylinder in inches,

D = diameter of Low Pressure Cylinder in inches,

S = Stroke of Pistons in inches,

P = Boiler pressure above atmosphere in lbs. per square inch.

- 60. The diameter of crank shaft, and of thrust shaft under the collars, to be at least 21ths of that of the intermediate shaft. The diameter of thrust shaft may be tapered off at each end to the same size as that of the intermediate shaft.
- 61. The diameter of the screw shaft to be equal to the diameter of intermediate shaft (found as above) multiplied by $\left(\cdot 63 + \frac{\cdot 03}{\mathsf{T}} \right)$, but in no case to be less than 1.07 T ,

where P is the diameter of propeller, and

T the diameter of intermediate shaft, both in inches.

This size of screw shaft is intended to apply to shafts fitted with continuous liners the whole length of the stern tube, as provided for in paragraph 32. If no liners are used or if two separate liners are used, the diameter of the shaft should be $\frac{21}{20}$ ths that given above.

The diameter of screw shaft is to be tapered off at the forward end to the size of the crank shaft.

62. Note.—The Rules are intended to apply to Two Cylinder Compound Engines, in which the ratio of areas of Low and High Pressure Cylinders does not exceed 4.5 to 1; to Triple Expansion Engines in

which it does not exceed 9 to 1; to Quadruple Expansion Engines in which it does not exceed 12 to 1; and in all cases, as regards the stroke, in which the length of stroke is not less than one half the diameter or greater than the diameter of the Low Pressure Cylinder. Engines of extreme proportions beyond these limits being specially submitted to be dealt with on their merits.

PERIODICAL SURVEYS. (See N.B.)

- 63. The machinery and boilers of all steam ships are to be surveyed annually if practicable, and in addition are to be submitted to a Special Survey upon the occasions of the vessels undergoing the Special periodical Surveys Nos. 1, 2, and 3, prescribed in the Rules, unless the machinery and boilers have been specially surveyed within a period of twelve months.
- 64. At these Special Surveys, and on other occasions if deemed necessary by the Surveyors, the propeller, stern-bush, and fastenings of the sea connections, are to be examined while the vessel is in dry dock.
 - 65. The stern shaft is to be examined annually and drawn at intervals of not more than two years.*
- 66. The cylinders, pistons, slide valves, crank shaft, and pumps are to be examined, and if necessary the condenser is to be examined and tested.
 - 67. The sea connections and arrangements of cocks, pipes, bilge-suctions, roses, &c., are to be examined.
- 68. The boilers and superheaters are to be examined internally and externally, and if deemed necessary by the Surveyors, both boilers and superheaters are to be drilled or tested by hydraulic pressure; the safe working pressure is to be determined by their actual condition.
 - 69. The safety valves are to be examined and set to the safe working pressure.
- 70. If satisfactory, these Surveys will be recorded in the Register Book thus:—"LMC9,99" in red or "B&MS9,99" in red.
- 71. "LMC" (LLOYD'S MACHINERY CERTIFICATE) denotes that the machinery and boilers are fitted in accordance with the Rules; and when followed by a date, indicates that they were found at that time to be in good condition. MS. with a date denotes that the engines at that time were found upon inspection to be in good condition. BS. with a date denotes that the boilers were found upon inspection at that time to be in good condition.
- 72. "B&MS" (Boilers and Machinery Surveyed), with a date, denotes that the boilers and machinery, though not fitted strictly in accordance with the Rules, were found upon inspection at that time to be in good condition.
- 73. In the event of either the machinery or boilers appearing to be impaired to such an extent as to render it desirable that either or both be specially surveyed within the periods prescribed above, a Certificate for either machinery or boilers for a limited period will be granted according to the nature of the case.
- * On the application of owners, the Committee will be prepared to give consideration to the circumstances of any special case.

BOILERS.

- 74. The boilers of all steam ships are to be specially surveyed when six years old, and subsequently they are to be specially surveyed annually.
- 75. At these surveys the boilers and superheaters are to be examined internally and externally, and if deemed necessary by the Surveyors, both boilers and superheaters are to be drilled or tested by hydraulic pressure; the safe working pressure is to be determined by their actual condition.
 - 76. The safety valves are to be examined and set to the safe working pressure.
 - 77. If satisfactory, these surveys will be recorded in the Register Book thus: "BS9,99" in red.
- 78. "BS" (Boilers Surveyed), with a date, denotes that the boilers were found upon inspection at that time to be in good condition.
- 79. In the event of the boilers appearing to be impaired to such an extent as to render it desirabe that they be specially surveyed within the periods prescribed above, a Certificate for a limited period will be granted according to the nature of the case.
- NB.—In reference to the Rules above quoted, and in order to prevent the disappointment arising from Ships losing their Characters from want of survey, it is hereby intimated that the duty of giving Notice of Periodical Surveys required by the Rules, or when repairs are necessary in consequence of damage, or from other causes, rests with the Owners, Masters, or Agents.

By order of the Committee,

A. G. DRYHURST,

Secretary.

2, White Lion Court, Cornhill, London, E.C. 26th April, 1900.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

USE OF ELECTRIC LIGHT ON BOARD VESSELS.

The following requirements as to the sizes, positions, and protection of the cables, and to the fitting of the cut-outs are now embodied as Rules.

LEADS OR CIRCUITS.

- 1. The sectional area of the copper wires in the cables should be at least in the proportion of one square inch per 1,000 ampères carried.
- 2. No single wire of greater size than 14 or of less than 18 standard wire gauge should be used. For portable leads cables composed of stranded wires should be used having sufficient conductivity and flexibility for the purposes intended.
- 3. The copper used in all wires or cables should have a conductivity of at least 98 per cent. that of pure copper.
- 4. The insulation resistance of all wires, including portable leads, should be not less than 600 megohms per statute mile, after 24 hours immersion in sea water.
- 5. The insulating material used must not appreciably soften if subjected to a temperature of 180° F. If india-rubber insulation is used, the wires should be first covered with a layer of pure rubber, then with a separator, then with a layer of vulcanizing india-rubber, and then with a layer of india-rubber coated tape. The whole should then be vulcanized together. The cable should afterwards be satisfactorily protected, preferably with a braided covering of waterproof fibre.
- 6. Wires which are insulated with any other material than india-rubber should fulfil the same conditions as to insulation resistance, and should be of equal durability with those above specified.

JOINTS.

- 7. Joints in branches, or of branches with leads of small circuits, must be made in properly constructed water-tight junction boxes, or should have the copper wires thoroughly soldered and the insulation carefully carried out, all the joints being made water-tight. Joints in flow and return wires should not be made opposite one another. All joints should be in accessible positions, none being made in bunkers, cargo spaces, or spaces which may at any time be used for carrying cargo, stores or baggage.
 - 8. For soldering wires, resin only should be used as a flux.
- 9. Where practicable, the leads should be placed where they can always be accessible; if they are laid in wood battens the covers should be screwed on, not nailed, and care should be taken that the casings are so arranged that water will not lodge in them. Cables which are properly covered with protective metal sheathing, or which are protected by galvanized wire armouring, may be unencased. They should, however, be secured by screwed clips, not by staples. All sharp bends in cables should be avoided.

- 10. All cables which are liable to be exposed to the weather or moisture should be lead covered, or be otherwise specially protected. Where great heat is experienced, no wood casing should be used, but the cables should be protected by iron casings, or if they are not exposed to mechanical injury, they may be armoured with galvanized wire and fastened to decks or bulkheads with screwed clips spaced not more than 12 inches apart.
- 11. If cables are led through cargo spaces, coal bunkers, or spaces which may at any time be used for carrying cargo, stores, or baggage, or which are not at all times accessible, they should be strongly protected against damage, preferably by iron casings. If they are led through metal tubes, these must be strongly secured, and should be fitted so that water cannot lodge in them.
- 12. Where cables pass through beams, bulkheads, or other iron work, they should be led through special fittings of sheet lead, hard wood or vulcanized fibre to prevent their being chafed, and where they pass through decks they should be led through metal tubes lined with wood, or vulcanized fibre, and securely fastened to the decks, standing at such a height above the deck level that water cannot stand above them. Where cables pass through watertight bulkheads the fittings should be provided with brass water-tight screwed glands.
- 13. In vessels having spaces allotted alternately for passengers and cargo, the lamp fittings in these spaces should be removable, and the terminals so arranged that they can be properly covered up with strong metal covers, or the whole of the fittings should be similarly provided with strong metal covers. The main switches and cut-outs should be outside these spaces, or if placed inside, they should be in strong iron boxes provided with iron covers, or otherwise securely arranged to prevent the fittings being tampered with.

DISTRIBUTION.

- 14. A main switchboard should be fitted in the dynamo room, to which all the main circuits throughout the ship should be brought, a switch and cut-out being fitted thereon for each circuit. The auxiliary switchboards for further sub-division of the current should be placed in conveniently accessible positions, and each such switchboard should be similarly fitted with a separate switch and cut-out for each sub-circuit. Cut-outs should be fitted to each lamp circuit where these are made with reduced size of wire. If vessels are wired on the double-wire system cut-outs should be fitted to each cable of these circuits, including lamp circuits.
- 15. In cases where electric lights are used for the mast-head light and side lights, the switches controlling these lights should be placed in a position where they can be controlled by the Officer of the watch, or other responsible person, and cannot be tampered with by other members of the crew, or by passengers, &c.
- 16. The switchboards should be of slate or other incombustible material. The switches should be on the quick break principle, and should be so constructed that they must be either full "on" or completely "off," that is, they must not be able to remain in an intermediate position. They should have ample rubbing surfaces and their conductivity should not be less than that of the wires connected to them.
- 17. Cut-outs should be fitted to each main or auxiliary circuit, on the switchboards, as near as possible to the switches of these circuits. If the switchboard is not fitted near the dynamo, or if more

than one dynamo may be used on any one circuit, then cut-outs should also be fitted to the main cable as near as possible to each of the dynamo terminals.

- 18. All other cut-outs should also be in easily accessible places, and as near as possible to the commencement of the cables or wires they protect. They should be mounted on slate or other incombustible bases and be arranged so that the fused metal may not be a source of danger, and where fitted with covers these should be incombustible.
- 19. All fuses should be of easily fusible and non-oxidizable metal, and should be so proportioned as to melt with a current 100 per cent. in excess of the normal current, that is they should melt with a current in the proportion of 2,000 ampères per square inch of section of the wires they protect. The fuses for branch wires to single lights should, however, if of tin wire, be of not greater size than 22 s.w.g.
- 20. The fuses for each cable should be made of standard dimensions, so that a large fuse cannot be used for a small cable by mistake, or, if wire fuses are used, permanent instructions should be fitted on or near each switchboard giving particulars of the proper size of fuse for each circuit.
- 21. In shaft passages and in damp places, all lamp switches and cut-outs should be of a strong water-tight pattern, or should be placed in water-tight boxes having hinged or portable water-tight covers. No switches or cut-outs are to be placed in bunkers.
- 22. There should be no joints in the cables leading from the dynamo to the main switchboard, nor in those leading from the main to auxiliary switchboards, nor should branches to single lamps be taken off these cables.
- 23. A voltmeter should be supplied with each installation. If more than one dynamo is fitted neither being capable of the whole of the output, an ampère meter should be supplied with each dynamo.

JOINTS WITH HULL.

24. In vessels fitted on the single-wire system, all the joints with the hull should be placed in accessible positions. Those for single lamps or for small cables should be made with brass screws not less than three-eights of an inch in diameter, carefully tapped into the iron or steel, having white brass washers, between the wires and the vessel, or the wires should be soldered to brass faced washers. For larger cables and for the pole of dynamo the cable wires should be properly sweated into brass or copper shoes, which should be bolted to the vessel. The iron or steel where contact is made should be filed bright, and the area of contact should not be less than eight times the section of the copper of the cable.

IN VESSELS CARRYING PETROLEUM.

25. The single wire system must not be adopted for any part of the installation. Switches and cut-outs must not be fitted in places liable to the accumulation of petroleum vapour or gas, and all lamps in places where it is possible for gas to accumulate must be made with an outer glass globe made air tight. All wires in such places are to be lead covered, or the insulation of the cables employed is to be of such a nature as not to be affected by petroleum. No joints of cables, switches, or cut-outs should be fitted in the pump room, but the wires for each lamp therein should be carried to the lamp from a distributing junction box placed outside the pump room or companion.

The following paragraphs referring to the effect of the Electric Light installations upon the Compasses are issued as suggestions, not as Rules.

POSITION OF DYNAMOS AND OF ELECTRIC MOTORS.

26. The position and type of Dynamos and Electric Motors should be such that the compasses will not be affected. Dynamos and large motors should be at least 30 feet from the standard compass.

CABLES.

27. In vessels fitted with continuous current dynamos, and wired on the single-wire system, no single cable should be carried within 15 feet of any compass, and cables conveying heavy currents should be fixed at still greater distance. If it is necessary to fix any cables within this distance, then for all parts of the vessel lighted from this cable the concentric or double-wire system should be adopted, the return wire being carried as near the flow as possible in the vicinity of the compasses.

ADJUSTMENT OF COMPASSES.

28. The compasses should be adjusted with the dynamo not working, after which the vessel's head should be put upon the different courses, with the dynamo running at full speed, and on each course the indications of the compass should be noted with the dynamo running with open circuit and with all possible combinations of the current switched "on" and "off" all circuits passing near the compasses. These indications should be compared with those obtained with the dynamo stopped, and any serious deflections of the compasses remedied before the vessel sails.

The requirements in paragraphs 3 to 8 inclusive, referring to the quality of the material used, or to the workmanship employed, are embodied as rules; but as the quality of the material can only be tested at the Cable Makers' works, and as the workmanship of the joints cannot be examined or tested after completion, the guarantee of the Electrical Engineers will be required as to these points.

By order of the Committee,

A. G. DRYHURST,

Secretary.

2, WHITE LION COURT, CORNHILL, LONDON, E.C., 26th April, 1900.

Ref

Ma

NOTICE No. 999.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

REFRIGERATING MACHINERY AND APPLIANCES.

NOTICE IS HEREBY GIVEN that the Committee of this Society have decided that upon the application of the owners of vessels fitted for carrying refrigerated cargoes, they will authorize their Surveyors to survey the refrigerating machinery and appliances, and in those cases where the following conditions are complied with and a satisfactory report is received from the Surveyor, certificates of these Surveys will be issued and the notation R.M.C. with date (in red) made against the vessel's name in the Society's Register Book, and in the special list of vessels fitted with refrigerating appliances. The name of maker and description and number of refrigerating machines, whether single or duplex, and the refrigerating power of the machines will be recorded in the special list in the Register Book, as also the number and capacity of insulated cargo chambers and the nature of insulation and the method employed for cooling the holds.

1. The insulation must be sound and in good order and of efficient construction. The details of construction showing the amount and nature of the insulating material employed in the various parts are to be reported to the Committee.

Bilge suction and sounding pipes and ballast tank air and sounding pipes, passing through insulated spaces, should be well insulated to prevent their being frozen up.

It is recommended that the wood-work of the insulation over tunnel tops be fastened with brass screws to facilitate the examination of this part, and that extra strong battens of American Elm be fitted upon it under the hatches, secured by brass screws. Also that insulated removable portions be arranged in the bulkhead insulation, where required, to give easy access to sluice valves and bilge suction roses. The bottoms, sides and coamings of all insulated hatches and limbers should be painted to prevent decay.

Thermometer tube flanges and covers should be arranged so that water does not run down and freeze in them when taking the temperature.

Cargo battens should be fastened to the floor or deck and to the sides of the chambers previous to loading the homeward cargo. Those to the sides of the chambers should be at least $1\frac{1}{2}$ inches in depth and 2 inches wide. One batten should be placed over each frame or ground, the others being intermediately arranged so that the spacing should be about 9 inches apart, edge to edge. The battens on the floor and decks should be at least $2'' \times 2''$.

- 2. The refrigerating machinery is to be of approved construction and of sufficient power to maintain the necessary low temperature in the cargo chambers in tropical climates when running 18 hours per day. For cargo capacities of above 70,000 cubic feet the machinery is to be either duplex or in duplicate.
- 3. A sufficient amount of spare gear is to be supplied and stowed where it is readily accessible. When two similar machines are fitted, each connected to different cargo compartments, one set of spare gear suitable for either machine will suffice.

Where one single dry air machine is fitted to each compartment, the following will be required:—

1 crank shaft with eccentric sheaves, complete.

1 piston rod and nuts for steam and air cylinders.

1 piston, complete, for each steam and air cylinder.

1 cylinder cover for each pattern used in steam and air cylinders.

1 eccentric strap.

1 eccentric rod.

1 slide valve spindle and nuts for steam and air cylinders, for each pattern used.

Half set of air valves and seats for air compressor.

1 set of inlet and outlet valves and 1 valve face (if fitted) for air expansion cylinder.

2 main bearing bolts.

1 set of connecting rod and piston rod bolts.

1 set of valves for air, circulating, feed and bilge pumps.

50 suction springs.

50 delivery springs.

50 buffer springs.

Assorted bolts, studs and nuts.

In addition to the foregoing it is recommended that the following be supplied:—

1 pair main bearing brasses, complete.

1 set of piston rod and connecting rod brasses.

Main and cut-off valves for each steam cylinder.

False valve face for each pattern fitted.

1 air pump bucket and rod.

1 set of escape valve springs.

6 tubes and 24 ferrules for condenser.

6 tubes for cooler.

6 tubes for air drying chamber.

A quantity of packings and joint rings.

Where one duplex or two single dry air machines are fitted to each compartment the following will be required :-

1 set of piston springs for each steam cylinder.

1 cylinder cover for each pattern used in air compression and expansion cylinders.

1 slide valve spindle and nuts for steam and air cylinders for each pattern used.

Half set of air valves and seats for air compressor.

2 main bearing bolts.

1 set of connecting rod and piston rod bolts.

1 set of valves for air, circulating, feed and bilge pumps.

20 suction springs.

40 delivery springs.

40 buffer springs.

Assorted bolts, studs and nuts.

In addition to the foregoing it is recommended that the following be supplied:—

1 crank shaft.

1 piston for each steam cylinder.

1 piston rod and nuts for steam and air cylinders.

1 piston, complete, for air compressor; and 1 for air expansion cylinder.

1 set of connecting rod and crosshead brasses.

1 inlet and 1 outlet valve and valve face (if fitted) for air expansion cylinder.

1 air pump bucket and rod.

1 eccentric sheave, strap, and rod.

1 set of escape valve springs.

6 tubes and 24 ferrules for condenser.

6 tubes for cooler and 6 for air drying chamber.

A quantity of packings and joint rings.

Where one single ammonia or carbonic anhydride compression machine is fitted:—

1 crank shaft with eccentric sheaves, complete.

Piston and rods complete with nuts for each steam cylinder and gas compressor.

1 valve spindle for each pattern used.

1 set of connecting rod and piston rod bolts.

2 main bearing bolts.

2 eccentric straps and rods.

1 compressor gland and packing, complete.

1 cover for each pattern used.

1 compressor suction and 1 delivery valve with springs and box, complete.

1 brine pump bucket and rod.

1 set of valves for air, circulating, feed, bilge, and brine pumps.

1 pair of connecting rod brasses for fan engines, with bolts, etc., complete.

1 set of piston springs, etc., for fan engine.

1 set of blocks for making all leather packings used.

1 gas regulating valve.

2 distributing and 2 collecting pieces with multiple branches for coils.

Sundry valves, cocks, flanges, and fittings.

Assorted bolts, studs, and nuts.

Quantity of packings and joint rings.

It is also recommended that the following be supplied: --

Main and cut-off valves for steam cylinders.

1 pair main bearing brasses, complete.

1 set of connecting rod and crosshead brasses.

1 air pump bucket and rod.

1 circulating pump bucket and rod.

6 tubes and 24 ferrules for condenser.

Lengths and bends of piping of each size used, together with flanges, couplings, and screwing apparatus for effecting repairs.

For ammonia and carbonic anhydride compression machines the following spare gear will be required, where one duplex or two single machines are fitted to each compartment:—

1 set of connecting rod and piston rod bolts.

2 main bearing bolts.

1 set of piston rings for each size of compressor.

I compressor gland and packing, complete.

1 cover for each end of gas compressor.

1 compressor suction and 1 delivery valve with springs and box, complete.

1 set of valves for air, circulating, feed, bilge, and brine pumps.

1 brine pump bucket and rod.

1 set of piston springs, rings, etc., for each steam cylinder and for fan engine.

1 pair of connecting rod brasses for fan engines, with bolts, etc., complete.

1 set of blocks for making all leather packings used.

Sundry valves, cocks, flanges and fittings.

Assorted bolts, studs and nuts.

A quantity of joint rings.

It is also recommended that the following be supplied :-

1 crank shaft.

1 piston for each size of steam cylinder, with springs, complete.

1 steam piston rod and nut.

1 compressor piston rod and nuts, complete.

 $\boldsymbol{1}$ set of connecting rod and crosshead brasses.

1 pair main bearing brasses, complete.

1 air pump bucket and rod.

1 circulating pump bucket and rod.

Main and cut-off slide valves.

Main and cut-off valve spindles and nuts.

1 eccentric sheave, strap, and rod.

6 tubes and 24 ferrules for condenser.

Lengths and bends of piping of each size used, together with flanges couplings, and screwing apparatus for effecting repairs.

1 gas regulating valve.

2 distributing and 2 collecting pieces with multiple branches for coils.

4. The required examination will consist of the following:-

Insulation and Trunk-Ways.

The insulation throughout the holds to be carefully examined and tested for dryness and fullness by sounding with a hammer and by boring. The test holes to be afterwards efficiently closed. Special attention is to be paid to the spaces under the snow boxes, trunks and hatches where dampness may accumulate, to the sides under stringers and under decks and to the tunnel tops. All limber hatches to be removed, the limbers cleared, and the suction pipes and roses, sluices and sounding pipes, to be examined. Hatches, air trunk-ways and thermometer tubes with their connections and fastenings to be examined, and where trunk-ways pass through water-tight bulkheads, the water-tight doors are to be examined and worked.

The trunk-ways should be as air-tight as practicable and their fastenings should be secure.

Machinery.

It is recommended that the machinery should be examined and tested under full working conditions upon the vessel's arrival at a home port, before the cargo is fully discharged. This is important for facilitating the subsequent examination.

In all cases, the steam pipes, water pipes and connections, the crank shaft and bearings, connecting rods, steam and air cylinders, pistons, slides and valves, compressors and pistons, compressor rods and glands, surface condenser and air or gas coolers, circulating, air, feed and bilge pumps, are to be carefully examined and the condensers and coolers tested if deemed necessary.

The auxiliary machinery, where fitted, is also to be examined.

In dry air machines special attention is to be given to the condition of the air expansion cylinders, their pistons and valves. In other machines special attention is to be given to the condition of the compressors, including the pistons, rods and glands, and to the expansion valve.

The refrigerator coils and their connections and the brine pipes and tanks, where fitted, are to be carefully examined at each survey and tested if deemed necessary.

Where the brine may escape to the bilges, the cement is to be examined at each survey.

The machinery is to be afterwards examined under working conditions, and tested on the snow box or refrigerators, the time and fall of temperature being noted.

If only part of the above examination is held, the certificate will be endorsed with a statement of what is required to complete the survey.

Survey at Loading Ports.

If the machinery and insulation have been examined as mentioned above and a further survey is required at a loading port, this further survey will consist of an inspection to ascertain that the dunnage battens are in good order and that no damage has been sustained to the insulation on the outward voyage, and also of a test of the refrigerating machinery under working conditions, the time of working and the fall of the temperature in the hold being noted.

When the hold is considered to be properly refrigerated, the machinery should be stopped and the temperature noted, and after a stoppage of say two hours the temperature should be again taken and the rise ascertained.

If the brine system of cooling is used, a longer period than two hours should elapse between these records being observed.

Fees.

The following are the charges that will be made for carrying out the above examination:—

							During Construction			Si	Subsequent Survey every Voyage.			
							£	s.	d.	1	£	s.	d.	
	tallation	ns unde	r 30,000 cu	ibic fee	et total c	apacity	 4	0	0		2	0	0	
"	"	,,	80,000	,,	,,		 6	0	0		3	. 0	0	
"	,,	,,	120,000	,,	,,		 8	0	0		4	0	0	
,,	. »	above	20,000	,,	,, '		 10	0	0		5	0	0	

2, WHITE LION COURT, CORNHILL, LONDON, E.C. 15th December, 1898.

By order of the Committee,
A. G. DRYHURST,
Secretary.

EXTRACTS FROM THE RULES

OF THE LATE

UNDERWRITERS' REGISTRY FOR IRON YESSELS (for 1884-85)

(NOW UNITED WITH LLOYD'S REGISTER OF SHIPPING),

SHOWING THE CONDITIONS OF CLASSIFICATION, &c.

REVISION OF CERTIFICATE OR SUSPENSION OF CLASS.

The certificate of class will remain good so long as the vessel, under periodical survey, is found worthy of it. In case of defects reported by the Surveyors not being made good, the class of the vessel will be revised or suspended by the Committee.

REFERENCE IN CASE OF COMPLAINT.

Any dispute shall be referred to three Shipbuilders or Engineers, one to be chosen by the Shipowner, one to be chosen by this Committee, and a third to act as umpire, to be chosen by the other two.

SURVEY FEES.

For surveying vessels periodically to ascertain condition, first visit				£1	1	0	
For each succeeding visit, when more than one visit is necessary				0	10	6	
For special surveys special charges will be made, subject to the contra	rol of th	e Comn	nittee.				

PERIODICAL SURVEYS

A thorough survey will be required once in every four years for vessels with an A1* or an A1* certificate; and once in every three years for vessels with an A1, A1, A or an A certificate. When vessels are abroad at the time they become due for survey, they must be examined on their return to the United Kingdom. The Surveyors are at all times to have free access to examine vessels holding a class in this Registry.

Vessels due for Periodical Survey which leave the United Kingdom without being duly surveyed and passed by the Surveyors to this Registry will have their class suspended until such survey has been properly made. Notice of Suspension of Class will be given in the first Supplement issued after the sailing of the vessel.

Vessels remaining abroad for two years after they become due for Periodical Survey will have their Class suspended until they have been re-surveyed.

Liver

St

Si

First Survey.

The vessel to be placed in dry dock. (The bottom may be cleaned, but should not be recoated before survey.) While in dry dock the rudder, rudder pins and gudgeons, and the whole of the bottom outside, are to be thoroughly examined, and in steamers the connections of the sea-cocks and openings in the bottom are to be examined, to see that they are in an efficient condition.

The holds, and, in steamers, the bunkers also, are to be cleared, the loose ceiling in the flat of bottom is to be lifted, and the Surveyor is to satisfy himself that the bottom inside is in good order, and that the cement is in good condition and satisfactorily adhering to the iron.

He is also to examine the decks, beam ends, and the sides of holds and 'tween decks, all fore and aft. In steamers the bilges and limbers under engines and boilers are to be cleaned out, so as to allow these parts to be examined by the Surveyor. In water-ballast steamers the tanks are to be examined externally, and, if the Surveyor deems it necessary, they are to be tested under the pressure due to the ballast-trim water-line, and sufficient ceiling removed to enable the Surveyor to satisfy himself of their tightness. In all cases the tanks are to be emptied, and examined inside. In all vessels any repairs that may be needed are to be done, and the vessel cleaned and painted as may be necessary.

Second Survey.

The vessel to be submitted to the same survey as before described for "First Survey," with the following additions:—

A strake of ceiling must be lifted in the bilges to allow an examination of the condition of the iron surfaces there and of the cement.

The windlass must be unhung when the main piece is of wood; and the chain cables must be ranged out for examination. In steamers the water ballast tanks must be tested under the pressure due to ballast-trim water-line.

Third Survey.

The vessel to be submitted to the same survey as before described for "First Survey," with the following additions:—

The whole of the close ceiling must be removed, and all the cement exposed and examined. The vessel must be cleaned and scaled, and, if the Surveyor deems it necessary, the plating and other parts must be drilled as he may direct, to ascertain the thickness. In steamers the water ballast tanks must be tested under the pressure due to ballast-trim water line.

Fourth Survey.

The vessel to be submitted to the same survey as before described for "First Survey," with the following additions:—

The windlass, if the main piece is of wood, must be unhung, and the chain cables ranged out for examination. In steamers the water ballast tanks must be tested under the pressure due to the ballast-trim water line.

st

Fifth Survey.

The vessel must be submitted to the same survey as before described for "Second Survey."

Sixth Survey or Special Survey.

The vessel must be submitted to the same survey as before described for "Third Survey," with the following additions:—

The actual condition and thickness of all the scantlings must be ascertained, the shell plating being drilled on at least three vertical lines in each strake, viz., forward, amidships, and aft, and elsewhere, at the discretion of the Surveyor, as he may direct.

A report of the vessel's condition and scantlings is to be submitted to the Committee, and such part or parts as they may direct are to be renewed, or otherwise strengthened.

After a vessel has passed her sixth survey, and been approved by the Committee, she must be submitted to the same series of surveys, commencing with the "First Survey," and at the same periodical intervals as before.

In steamers, whenever the engines or boilers are removed, a survey is to be held on the vessel's bottom in way thereof, and such repairs as are necessary must be effected before the engines or boilers are replaced.

The preceding rules for periodical surveys are not to limit the Surveyor's discretion, if, in his judgment, it is necessary to make a more complete examination at any time; and, before completing the report, the Surveyor must, at every periodical survey, satisfy himself that the vessel and her equipment are in a good and efficient condition.

The "Third Survey" must be complied with before the expiration of thirteen years from the date of launch for vessels with an A1* or A1* certificate, ten years for vessels with an A1 or A1 certificate, and nine years for vessels with an A or A certificate; and the "Sixth Survey" before the expiration of twenty-six years from the date of launch for vessels with an A1* or A1* certificate, twenty years for vessels with an A1 or A1 certificate, and eighteen years for vessels with an A or A certificate.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING, 2, WHITE LION COURT, CORNHILL, E.C. 1st September, 1885.

EXTRACTS FROM THE RULES of the late UNDERWRITERS' REGISTRY FOR IRON VESSELS (for 1884-85)

(NOW UNITED WITH LLOYD'S REGISTER OF SHIPPING).

EQUIPMENT FOR STEAM VESSELS.

Section 29.—The equipment of Anchors and Chain Cables and Hawsers to be in accordance with Table 14 for Steam Vessels (see below).

The tonnage regulating equipment is to be the gross register tonnage under upper deck, with the addition of three-tenths of the tonnage of erections above upper deck.

TABLE No. 14.—ANCHORS, CHAINS, AND HAWSERS FOR STEAM VESSELS.

		Anchors, with either Iron or					ther Iron or Wood Stocks. Stud-chain Cables. Hawsers and Wa						h either Iron or Wood Stocks.			n Cables. Hawse		nd Warp	з.	
VESSELS TONNAGE.		Number			W	eight.					Gt		Stream Chain.						VESSELS	
See Section 29.		Number		Вот	wers.	Stream.	Vadas	2đ	Minimum Size.	Proved to Admiralty Test.	Length.	Stream Chain.		Tow Rope.	Hawsers.	Warps.	Length.	TONNAGE. See Section 29.		
	Bowers.	Stream.	Kedges.	Without Stock.	Admiralty Test.	Stream.	Keuge.	Kedge.		1030.								200 DOC 1011 201		
Tons. Tons. 100 ander 150 150 , 188 188 , 225 225 , 263 263 , 300 300 , 375 375 , 450 450 , 525 525 , 600 600 , 675 675 , 750 750 , 900 900 , 1050 1050 , 1200 1200 , 1350	2 2 2 2 2 2 3 3 3 3 3 3 3 3 3 3 3 3 3 3	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	1 1 1 1 1 2 2 2 2 2 2 2 2 2 2 2 2	$\begin{array}{c} \text{Cwt.} \\ 3 \\ 4 \\ 5\frac{1}{4} \\ 6 \\ 7\frac{1}{4} \\ 10 \\ 12 \\ 13\frac{1}{2} \\ 15\frac{1}{4} \\ 16\frac{3}{4} \\ 18 \\ 21 \\ 23\frac{1}{2} \\ 25\frac{1}{2} \end{array}$	Tons. 4·9 6·4 7·6 8·2 9·5 10·4 12·0 13·9 15·2 16·7 18·0 19·0 21·6 23·5 25·2	$\begin{array}{c} \text{Owt.} \\ 1 \\ 1 \\ 1 \\ \frac{3}{4} \\ 2 \\ 2 \\ \frac{2}{3} \\ \frac{3}{4} \\ 3 \\ 4 \\ \frac{3}{4} \\ 5 \\ 6 \\ 6 \\ \frac{1}{2} \\ 7 \\ 8 \\ 9 \\ 10 \\ 10 \\ \frac{1}{2} \\ \end{array}$	$\begin{array}{c} \text{Owt.} \\ \vdots \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1$	Cwt	Inches. $\begin{array}{c} 111\\ 16\\ 13\\ 16\\ 14\\ 16\\ 15\\ 16\\ 1\\ 16\\ 1\\ 16\\ 1\\ 1\\ 1\\ 1\\ 1\\ 1\\ 1\\ 1\\ 1\\ 1\\ 1\\ 1\\ 1\\$	Tons. 8·1 11·9 13·8 15·8 18 20·3 22·8 25·4 28·1 31 34 37·2 40·5 44 47·5	Fathoms. 120 150 165 165 165 165 195 210 240 240 240 270 270	Fath. 45 45 45 45 60 60 60 60 60 75 75 75	Size. 8 16 9 18 100 16 100 16 11 16 16 16 16 16 16 16 16 16 16 16	$\begin{array}{c} \text{Inches.} \\ 5\frac{1}{2} \\ 6 \\ 6 \\ 6\frac{1}{2} \\ 7 \\ 7\frac{1}{2} \\ 8 \\ 8\frac{1}{2} \\ 9 \\ 9\frac{1}{2} \\ 10 \\ 10 \\ 10 \\ 10 \\ 10 \\ 10 \\ 10 \\ \end{array}$	Inches. $3\frac{1}{2}$ 4 4 5 $5\frac{1}{2}$ 6 $6\frac{1}{2}$ 7 8 8 9 9 $9\frac{1}{2}$	Inches 4 5 5 5 1 2 5 1 2 6	Fath. 90 90 90 90 90 90 90 90 90 90 90 90 90	Tons. 100 under 150 150 , 188 188 , 225 163 , 300 375 , 450 450 , 525 160 600 , 675 , 750 , 900 900 , 1050 1200 , 1350		
1350 " 1500 1500 " 1800 1800 " 2100 2100 " 2400 2400 " 2700 2700 " 3000 3000 " 3450 3450 " 3900 4500 " 5250 5250 " 6000	3 3 3 3 3 4 4 4 4	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	27 ³ / ₄ 30 32 34 36 ¹ / ₂ 38 40 41 43 45	26.9 28.6 1.1 31.6 33.4 34.5 35.7 37.0 38.0 39.2 41	$\begin{array}{c} 11\\12\\13\\13\frac{1}{2}\\14\\14\frac{1}{2}\\15\\16\\17\frac{1}{2}\\19\\21\\\end{array}$	$\begin{array}{c} 5\frac{4}{12} \\ 5\frac{1}{2} \\ 6 \\ 6\frac{1}{2} \\ 6\frac{3}{4} \\ 7 \\ 7\frac{1}{2} \\ 7\frac{1}{2} \\ 8 \\ 8\frac{1}{2} \\ 9\frac{1}{2} \\ 10 \\ \end{array}$	234 234 25141919219234144 44234 4434 5	$\begin{array}{c} 16 \\ 111 \\ 116 \\ 1112 \\ 116 \\ 116 \\ 116 \\ 116 \\ 116 \\ 2 \\ 216 \\ 2$	51·2 55·1 59·1 63·3 67·6 72 76·6 81·3 86·1 91·1	270 270 270 270 270 270 270 270 270 300 300 330 330	75 75 75 75 75 90 90 90 90 90	$\begin{matrix} 1 \\ 1\frac{1}{16} \\ 1\frac{1}{16} \\ 1\frac{1}{16} \\ 1\frac{2}{16} \\ 1\frac{3}{16} \\ 1\frac{3}{16} \\ 1\frac{3}{16} \\ 1\frac{4}{16} \\ 1\frac{5}{16} \\ 1\frac{5}{16} \end{matrix}$	10 11 11 11 12 12 12 12 12 12 12	$ \begin{array}{c} 10 \\ 10 \\ 10 \\ 11 \\ 11 \\ 12 \\ 13 \\ 14 \\ 15 \\ $	6 6 6 ¹ / ₂ 7 7 8 8 8 8 8 9 9	90 90 90 90 90 90 90 90 90 90	1350 ,, 1500 1350 ,, 1500 1500 ,, 1800 1800 ,, 2100 2100 ,, 2400 2700 ,, 3000 3000 ,, 3450 3450 ,, 3900 3900 ,, 4500 4500 ,, 5250 5250 ,, 6000		

Anchors and Chains to be tested to Admiralty proof. A reduction of 15 per cent. will be allowed in the weight of the Third and Fourth Bower.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING,

^{2,} WHITE LION COURT, CORNHILL, LONDON, E.C.—15th April, 1893.

St

And

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

CAST STEEL ANCHORS.

NOTICE IS HEREBY GIVEN that the Committee of this Society will hereafter require that all Cast Steel Anchors intended for vessels classed or proposed to be classed in the Society's Register Book shall be subjected, in addition to the statutory tests, to the percussive, hammering, and bending tests recommended in the recent report of the Committee appointed by the Board of Trade to consider the question of tests of Cast Steel Anchors.

These tests, which are hereunder set forth, must be carefully and completely made in the presence and to the satisfaction of officers appointed by the Committee, viz.:—

PERCUSSIVE TEST.

1. Anchors, or when anchors are made of more than one piece, each piece shall be subject to this test, as follows:—

GIVEN WEIGHT. GIVEN HEIGHT. The anchor or piece shall be raised the given height for the given weight and shall be dropped on an iron slab.

15 cwt. and below - 15 feet.

Above 15 cwt. - 12 feet.

The given height means that the lowest part of the anchor or piece when suspended shall be at least the given height above the iron slab on to which it is to be dropped.

2. An anchor of the Admiralty pattern shall first be raised vertically to the given height with its shanks and arms in a horizontal position, and shall be let fall from that height.

3. It shall then be raised a second time to the given height, and shall be suspended with the crown downwards. Two iron blocks shall be placed underneath it, and it shall be let fall from this position so that one of the blocks receives it on the middle of one arm, and the other block receives it on the middle of the other arm.

4. The slab for the horizontal test shall be of steel or iron, well laid on a solid concrete foundation to the satisfaction of the inspector.

5. If the slab on which the anchor falls is broken, the test shall be repeated until a slab is made that does not break.

6. The blocks for the vertical test shall be solid, and shall be of sufficient height to prevent the crown of the anchor from touching the slab, and shall be otherwise to the satisfaction of the inspector.

HAMMERING TEST.

7. When the percussive test has been passed successfully, to the satisfaction of the inspector, the anchor or piece shall be slung and freely put to a hammering test as follows, that is to say, it shall be well hammered over its parts with a sledge hammer weighing not less than 7 lbs., and shall be required to give under this treatment such a clear ring in all its parts as shall satisfy the inspector that the casting is sound, and without flaws existing either originally or developed as the result of the application of the preceding percussive tests.

BENDING TEST

8. Cast steel may be passed as sufficiently ductile for anchors when a piece of each casting, 8 inches in length, is cut from the casting, turned to 1 inch in diameter, and is then bent cold by hammering through an angle of 90 degrees over a radius of $1\frac{1}{2}$ inches, without showing signs of flaw or fracture.

9. There must be a piece cast on each cast steel anchor, or on each portion of such anchor when it is made of more than one casting, and such piece must be of sufficient size to enable one test piece of the

TI O. NITTIA ITTE MEANT NIN I AMVI

size before stated to be cut out of it, or it may be (at the discretion of the manufacturer) of sufficient size to enable four test pieces to be cut out of it. If it is only of sufficient size to enable one test piece to be cut out of it, that piece shall be subjected to the bending test named in paragraph 8, and, if it fails to

withstand it, the casting is to be condemned.

If the piece is large enough to enable four test pieces to be cut out of it, these four test pieces shall be disposed of as follows, that is to say, one of them shall be turned in a lathe to 1 inch in diameter for a length of 8 inches, and bent cold through an angle of 90 degrees over a radius of $1\frac{1}{2}$ inches, and if it withstands this test without flaw or fracture, shall be deemed to have withstood a satisfactory test for ductility. If the one test piece does not pass this test, all or any of the other three test pieces may be tested in a similar manner, and if any one of the four tests pieces passes this test, the anchor or part of the anchor, as the case may be, shall be deemed so far satisfactory.

ANNEALING.

10. Each anchor must be properly and sufficiently annealed, and when so annealed, shall be stamped "annealed steel." Annealing is not to be regarded as proper, or efficient, unless the process extends from three days for small anchors, up to six days for large ones.

By order of the Committee,

B. WAYMOUTH,

Secretary.

2, White Lion Court, Cornhill, London, E.C. 10th November, 1887.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

CAST STEEL ANCHORS.

Sir.—The Committee have recently had under consideration a report by the Chief Engineer Surveyor on the several methods of making Steel Castings.

Notwithstanding all the care and precaution that may be taken in forming the moulds, and in the selection of the material used for the purpose, Steel Castings are not infrequently found with

more or less serious cracks or defects, owing generally to the uneven rate of cooling.

With regard to Cast Steel Anchors, and with reference to Circular No. 647 (of which I enclose a copy), I am directed to request that you will, in future, examine the Castings of all parts of Steel Anchors intended for Ships classed or proposed to be classed in the Society's Register Book, before they are annealed.

You will then be better able to observe any defects which may exist, the skin or scale put on by annealing, rendering it more difficult to detect cracks or other defects, particularly when such

cracks or defects have been carefully hammered up and closed.

If on examination any such cracks or defects are observed, the Anchor should not be tested or passed; but if the defects appear to be on the surface only and can be entirely cut out without damaging the Anchor, this may be done in your presence; you must however satisfy yourself that they are entirely removed before you proceed with the tests.

I am, Sir,

Your obedient servant,

HENRY C. SEYFANG, Secretary,

Committee on Proving Machines.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

STEEL MANUFACTURERS.

The following firms having applied to have the steel produced by them tested by a Surveyor to this Society and their mode of procedure reported upon, their applications have been complied with and the Surveyors' reports found satisfactory by the Committee.

FIRMS IN THE UNITED KINGDOM.

Anthracite (The), Iron and Steel Co. (Lim.), Trimsaran, by Kidwelly, South Wales. (For bars only.)

Armstrong (Sir W. G.), Whitworth & Co. (Lim.), Elswick. (Steel castings.)

Ayrshire Foundry Co., Stevenston, N.B. (Steel castings.)

Barrow Hæmatite Steel Co. (Lim.), Barrow.

W. Beardmore & Co., Rolling Mills and Steel Works, Parkhead, Glasgow.

Bell Bros. (Lim.), Port Clarence, Middlesbrough.

H. Bessemer & Co. (Lim.), Bessemer Works, Sheffield.

Blaydon Iron Works (The), Blaydon. (Steel castings.)

Bolckow, Vaughan & Co. (Lim.), Middlesbro'-on-Tees.

Bolton Iron & Steel Co. (Lim.), Bolton, Lancashire.

John Brown & Co. (Lim.), Sheffield.

Brymbo (The) Steel & Ingot Iron Works, near Wrexham. (For bars only.)

Butterley Co. (Lim.), Codnor Park, near Alfreton.

Calderbank Steel Co. (Lim.), Calderbank.

Caledonian Steel Castings Co., Helen Street, Govan, Glasgow.

Charles Cammell & Co. (Lim.), Sheffield.

Clydebridge Steel Co. (Lim.), Rolling Mills and Steel Works, Cambuslang.

Coltness Iron Co. (Lim.), Melting Furnace and Foundry, Newmains, Lanarkshire.

David Colville & Sons, Rolling Mills and Steel Works (Dalzell Steel and Iron Works), Motherwell.

Consett Iron Co. (Lim.), Blackhill, Durham.

Dorman, Long & Co., Middlesbro'-on-Tees.

Dowlais Iron Works Co., Dowlais and Cardiff.

Earl of Dudley's (The) Round Oak Iron and Steel Works (Lim.), Brierley Hill, Staffordshire. (Sections and Bars.)

Thomas Firth & Sons (Lim.), Norfolk Works, Sheffield.

Frodingham Iron & Steel Co., Frodingham, near Doncaster. (Sections and Bars.)

Glasgow Iron & Steel Co. (Lim.), Melting Furnaces at Wishaw, and Rolling Mills at Wishaw and Motherwell.

Glengarnock Iron and Steel Co. (Lim.), Glengarnock, N.B. (Sections and Bars.)

Hardie & Gordon, Melting Furnaces and Foundry at Dalreoch, Dumbarton.

P. R. Jackson & Co. (Lim.), Salford Rolling Mills, Manchester.

W. Jessop & Sons (Lim.), Brightside Works, Sheffield.

Lanarkshire Steel Co. (Lim.), Motherwell. (Bars only.)

Leeds Forge Co. (Lim.), Leeds.

Lilleshall Co. (Lim.), Offices, Priors Lee Hall, near Shifnal. (For plates not exceeding half-an-inch.)

Nettlefolds (Lim.), Castle Works, Tydu, near Newport, Mon. (Rivet and Stay bars.)

New British (The) Iron Co., Corngreaves, near Birmingham.

S. Osborn & Co., Clyde Steel and Iron Works, Sheffield. (Steel castings.)

Palmers' Shipbuilding & Iron Co. (Lim.), Jarrow-on-Tyne.

Park Gate Iron & Steel Co. (Lim.), Rotherham.

Patent (The) Nut & Bolt Co. (Lim.), near Birmingham. (For rivet bars only.)

Patent Shaft & Axletree Co. (Lim.), Wednesbury.

Shelton Iron, Steel & Coal Co. (Lim.), Stoke-on-Trent.

South Durham Steel & Iron Co. (Lim.), Stockton-on Tees and West Hartlepool.

John Spencer & Sons, (Lim.), Newburn Steel Works, Newcastle-on-Tyne.

Springfield Steel Co., Melting Furnace and Foundry, 777, London Road, Glasgow.

Stanners Closes Steel Works, Wolsingham. (Steel castings).

Steel Company of Scotland (Lim.), Rolling Mills and Steel Works at Newton and Blochairn.

Steel, Peech & Tozer, (Lim.), Sheffield. (Rivet and Stay bars.)

Stewart, A. & J., & Menzies (Lim.), Rolling Mills and Steel Works, Mossend.

Summerlee & Mossend Iron & Steel Co. (Lim.), Rolling Mills and Steel Works at Mossend.

Swalwell Steel Works, Co. Durham. (Steel castings.)

Taylor Bros., Leeds.

Vickers, Sons & Maxim (Lim.), River Don Works, Sheffield.

Weardale Iron & Coal Co. (Lim.), Spennymoor.

West Cumberland Iron & Steel Co. (Lim.), Workington.

Wigan Coal & Iron Co. (Lim.), Wigan. (Sections and Bars.)

FOREIGN FIRMS.

Aciéries de Grenelle (Mons. E. Plichon), 56, Rue Lourmel, Paris. (Steel castings.)

Aciéries Hauts-Fourneaux & Forges de Trignac, near St. Nazaire.

Actien-Gesellschaft der Dillinger Hüttenwerke, Dillingen-Saar (Rheinpreussen), Germany.

Aktiebolaget Bofors-Gullspang, Sweden (Melting Furnaces and Foundry at Bofors. Melting Furnaces and Forge at Bjorneborg.)

Angleur Steel Works, near Liège.

Avesta Steel Works, near Stockholm.

Bethlehem Steel Co., South Bethlehem, Philadelphia.

Blechwalzwerk Schulz-Knaudt, Essen. (Rolling Mills.)

The Carnegie Steel Co. (Lim.), Pittsburg, Pa, U.S.A. Société John Cockerill, Seraing, near Liège.

Compagnie Anonyme des Forges de Chatillon & Commentry, Commentry, France.

Compagnie des Hauts-Fourneaux, Forges et Aciéries de la Marine et des Chemins de Fer, St. Chamond, France.

Degerfors Steel Works, Sweden.

Domnarfvet Steel Works, Sweden.

Donawitz Iron & Steel Works, near Leoben.

Doremiex, Fils & Cie., St. Amand, France. (Rolling Mills.)

Duisburger Eisen und Stahlwerke, Duisburg.

Eisenbahn-Bedarfs-Actien Gesellschaft, Friedenshutte - Oberschlesien, Germany. (Siemens Martin Steel.)

Espérance Rolling Mills, Longdoz, Liège.

Fonderia Milanese di Acciaio, Milan. (Steel castings.)

Fonderies, Forges and Aciéries de St. Etienne, St. Etienne, France.

Forges de Clabecq, Belgium. (Rolling Mills.)

Forges de la Loire et du Midi (Messrs. Marrel Frères), Rive de Gier, France.

Ganz & Co., Ratibor, Silesia. (Steel castings.)

Geisweider Eisenwerke Actien-Gesellschaft, Geisweid (Kries Siegen), Germany.

Gewerkschaft Deutscher Kaiser (Thyssen & Co.), Bruckhausen, Germany.

Gewerkschaft Grillo, Funke & Co., Schalke, Westfalen.

Gute Hoffnungs Hütte, Oberhausen.

Hauts-Fourneaux, Fonderies Forgeries & Laminoirs
De Meurthe & Moselle (Mr. Fould-Dupont),
Usines de Pompey, France.

Hoerder Steel Works, near Dortmund.

Illinois Steel Co., Chicago, U.S.A.

Innerberger Haupt-gewerkschaft.

Jemeppe Rolling Mills, near Liège.

Kladno Steel Works, Kladno, near Prague.

Kohlswa Jernverks Aktiebolag. (Melting Furnaces and Foundry at Kohlswa, Sweden.)

Krainische Industrie Gesellschaft, of Assling, Oberkrain.

Krupp's Steel Works at Annen.

Do. do. Essen.

Krupp's Steel Works at Magdeburg. (Steel castings.)

Luxemburger-Bergwerks und Saarbrücker Eisenhütten - Actien - Gesellschaft, Burbach, near Saarbrücken, Germany. (Sections and Bars.)

Magyar Kiralyi Allamvasutak Gepgyaranak (Rolling Mills at Zolyom-Brezo; Rolling Mills and Steel Foundry at Diosgyor, Austria.)

Motala Company, Sweden.

Neuberg Steel Works, Neuberg, Styria.

Oberbilker Stahlwerk, Dusseldorf-Oberbilk.

The Phœnix Company at Eschweiler and Rohort.

Rimamurany-Salgo-Tarjaner Eisenwerks Actien-Gesellschaft, Budapest. (Steel Works in Ozd, Hungary).

Saarbrücker Gussstahlwerke, Malstatt-Burbach, Germany. (Steel castings.)

Schneider & Co., Creusot.

Skodawerke-Actien Gesellschaft, Pilsen, Bohemia. (Steel castings.)

Sociedad de Altos Hornos, Bilbao.

Sociedad la Vizcaya, Bilbao.

Sociedad Metalurgica Duro-Felguera, La Felguera, Austurias, Spain.

Società degli Alti Forni, Fonderie ed Acciaierie di Terni. Works at Terni and Savona (late Messrs. Tardy & Beneck).

Societá Ligure Metallurgia, (Lim.) Sestri Ponente, Italy.

Société Anonyme d'Escaut & Meuse, Anzin (Nord), France.

Société Anonyme de Acieres & Fonderies d'Art, Haine St. Pierre Belgium. Société Anonyme de Marcinelle & Couillet, Couillet, Belgium.

Société Anonyme des Forges et Fonderies de Montataire, Montataire, France.

Société Anonyme des Hauts-Fourneaux, Fonderies & Forges de Franche-Comté, Fraisans (Jura), France.

Société Anonyme des Hauts-Fourneaux Forges et Aciéries de Denain & D'Anzin, Denain, France (Nord).

Société Anonyme d'Ougrée, near Liège.

Société Anonyme de la Providence, Hautmont (Nord), France.

The Union Iron & Steel Co., Dortmund, Germany.

Thyssen & Co., Mulheim, a.d. Ruhr, Germany.

Ungarischen Berg-und Hüttenwerke und Domänen der priv. österr.-ung. Staats-Eisenbahn-Gesellschaft, Budapest. (Steel Works in Resicza.)


Witkowitz Steel Works, Witkowitz, Mohren.

(Revised May, 1900.)

SKETCH SHOWING METHOD OF ESTIMATING

SKETCH A.


Sketch illustrating method of determining the depth of Turret deck Vessels.

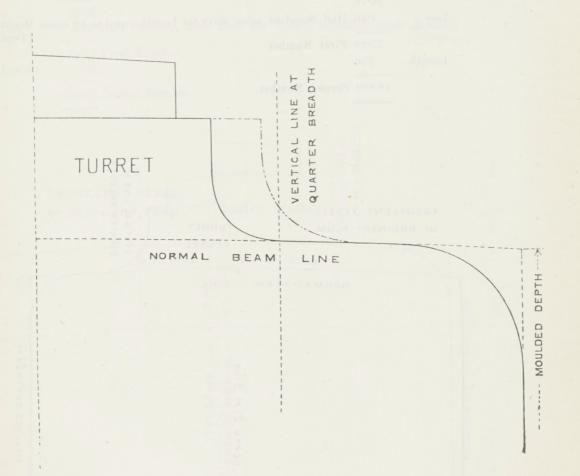

SKETCH SHOWING METHOD OF ESTIMATING THE

Dimensions.

```
250 ft. 0 ins.
               Length (Rule)
                                                         36 ,, 0 ,,
               Breadth (Moulded)...
                                                          21 ,, 0 ,,
                Depth ( Do. )...
                 FT.
\frac{1}{2} Breadth
                18.0
                                       Proportions: -Length = 6.9 Breadths.
                21.75
Depth ...
                                                            = 11.4 Depths.
                37.0
1 Girth...
                76.75
                 1.46 Half Standard mean sheer for Length equal to 12 times Moulded
     Less
                                                                               [Depth.
                 75.29 First Number.
                  250
     Length...
               18,882 Second Number.
```

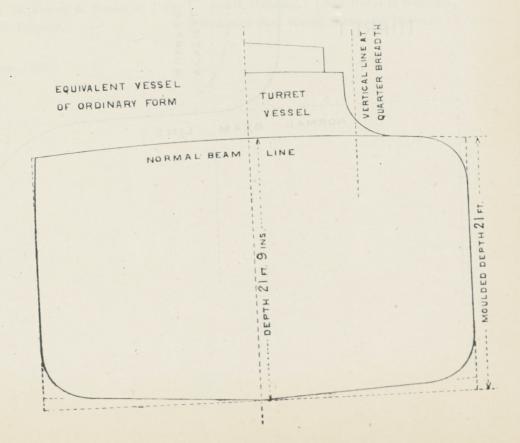

SKETCH B.

LING NUMERALS OF A TURRET DECK VESSEL.


1 Breadth


Depth ...

1 Girth ...

Less

Dimensions,

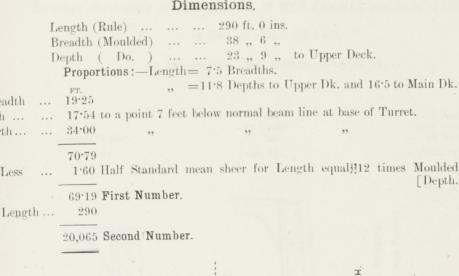

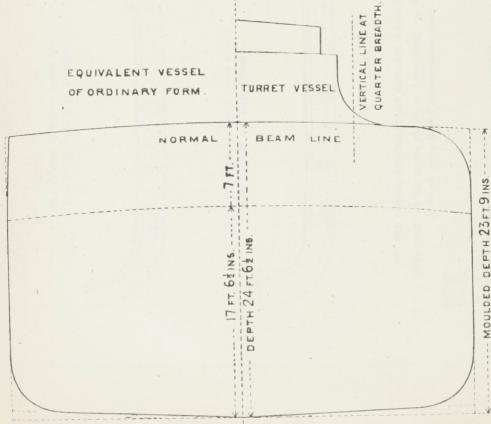

SKETCH B

C NUMERALS OF A TURRET DECK VESSEL STAR

Dimensions description

	feet below normal beam	

70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79
70-79

20.055 Second Number. Ned such bouses source

OF ORDINARY FORM


TURRET VESSEL

TOTOLOGICAL FORM

TOTOLOGICAL FOR

Sketches illustrating the arrangement of WEB FRAMES and SIDE STRINGERS in lieu of HOLD BEAMS,


as per Section 14a, paragraphs 9 to 19.

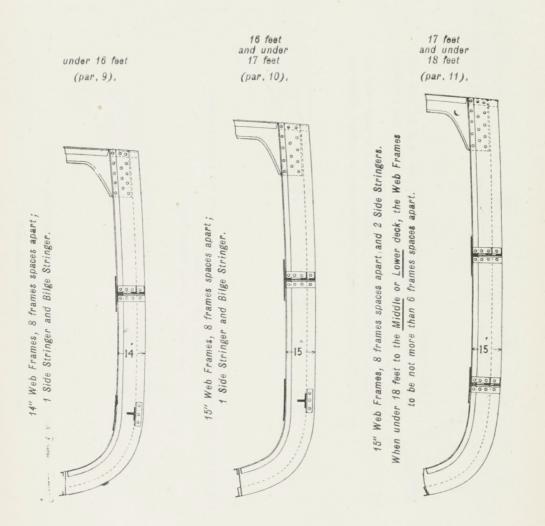

able


orms

15" Web Frames, 6 frame spaces apart
and 2 Side Stringers.
When of this depth to Middle deck, Web frames to be 18" deep.

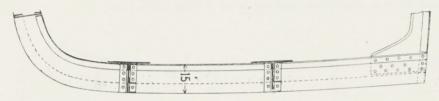

15" Web Frames, 6 frame spaces apart and 3 Side Stringers.

When of this depth to Middle deck, Web frames to be 18" deep and 3 Side Stringers.

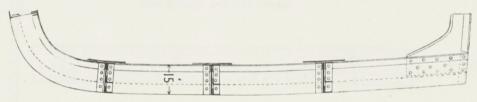


Or, in Vessels fitted with double bottoms, provided the brackets outside the margin plate be extended up the bilges to a height of three times the depth of the ordinary rule floor at the middle line.

Web frames may be 18" deep, 6 frame spaces apart with 2 Side Stringers. When of this depth to $\underline{\text{Middle}}$ deck, Web frames to be 18" deep and 3 Side Stringers.


21½ feet and under 22½ feet (par. 13).

Web Frames and Side Stringers in lieu of Hold Beams—(continued).


Web Frames and Side Stringers vin Lieu of Hold: Beems-(continued

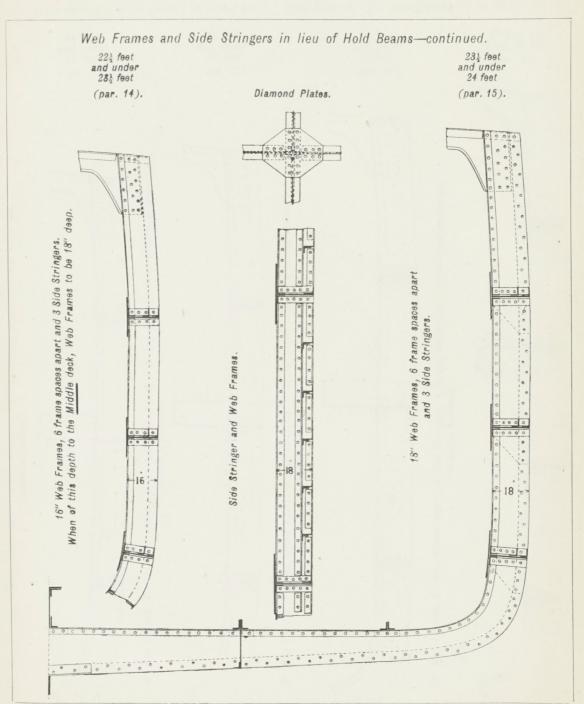


16" Web Frames, 5 frame soaces apart; 3 Side Stringers, 4 Strong Beams and an additional watertight transverse bulkhead.

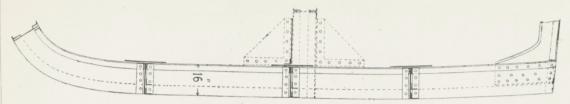


16" Web Frames, 4 to 5 frame spaces apart; 3 Side Stringers, 4 Strong Beams and an additional watertight transverse bulkhead.

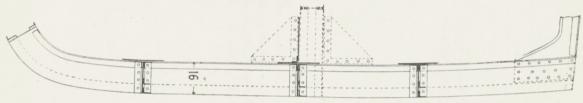

18" Web Frames, 4 frame spaces apart; 3 Side Stringers, 4 Strong Beams and an additional watertight transverse bulkhead.

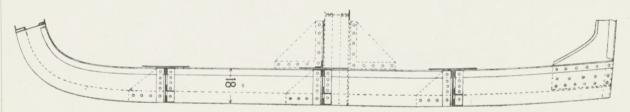


18" Web Frames, 4 frame spaces apart; 4 Side Stringers, 4 Strong Beams and an additional watertight transverse bulkhead.

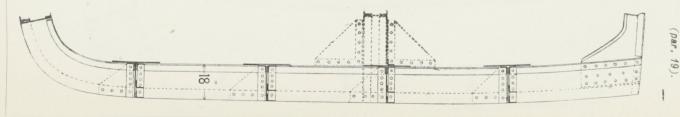

Web Frames extra strength wide spaced in lower hold. in Way of Raised Quarter Deck in (See Section 14a, paragraphs 16 lieu of lower deck beams and to 19.) beams of


27 feet and under 28 feet.


Sketches illustrating the arrangement of Side Stringers and Deep Framing in lieu of Hold Beams or Web frames, as per Section 14 b. paragraph 4.

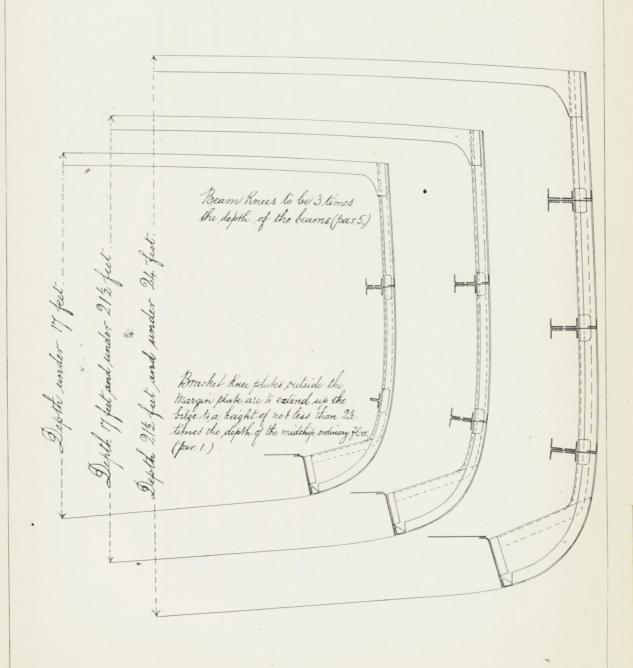



de Section 145, paragraph ch illustrating the connections of

sper paragraphs 5.6.7.8 8.9. Budge Deck.	Main Docks Lee paragraph 3.	Pridge Dick.	Man Deck:	Pringe Deck - Worklates	Main Dede.
Tection 45. Thethes shewing arrangements at Break of Plaised Quarter Dock as per paragraphs 5.6.7.8 49. Paragraph 9. Where the plasing number exceeds 20,000 or the Vessel is over 13 depths to length, the break bulkhead is to be not less Than four frame spaces about the after end of the Engine opening.	Josephing Males Josephingman Dealth of Scarter Seath of Seater Seath of Seater Seath of Seater Seats Seas Seats Seas Seats Seas Seas Seats	is 24,000 and under 26,000. 45.	Doubling plates Sightwaym Holes Sayth of Decks 4 plane spaces	Tav. 7 Where the plating number is 26,000 and above, 80.	Doubling Hates. Southing Hates. Scarth of Decks.

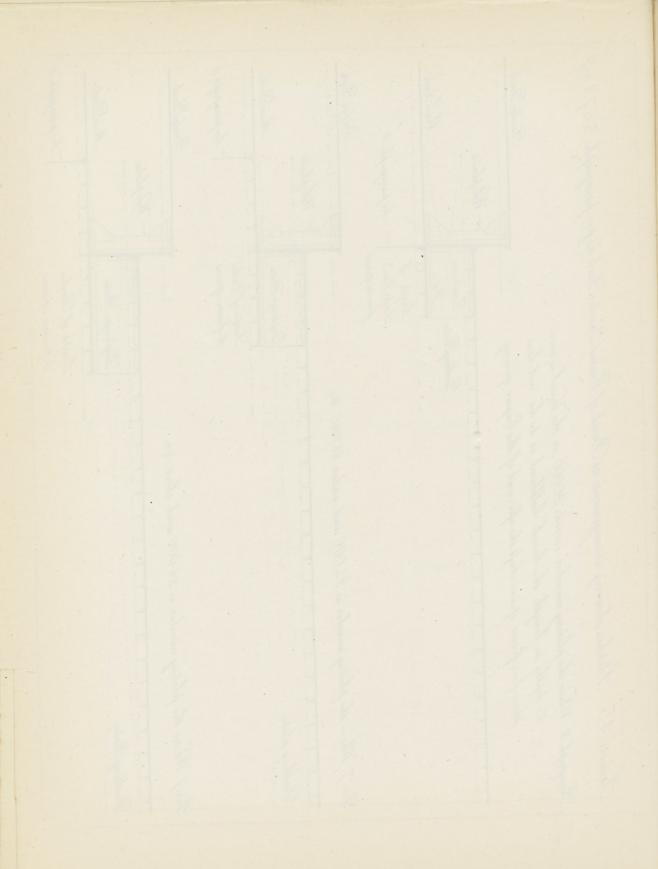


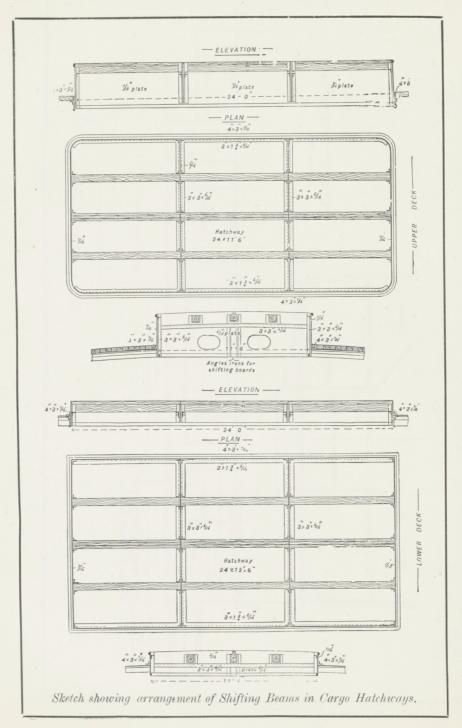


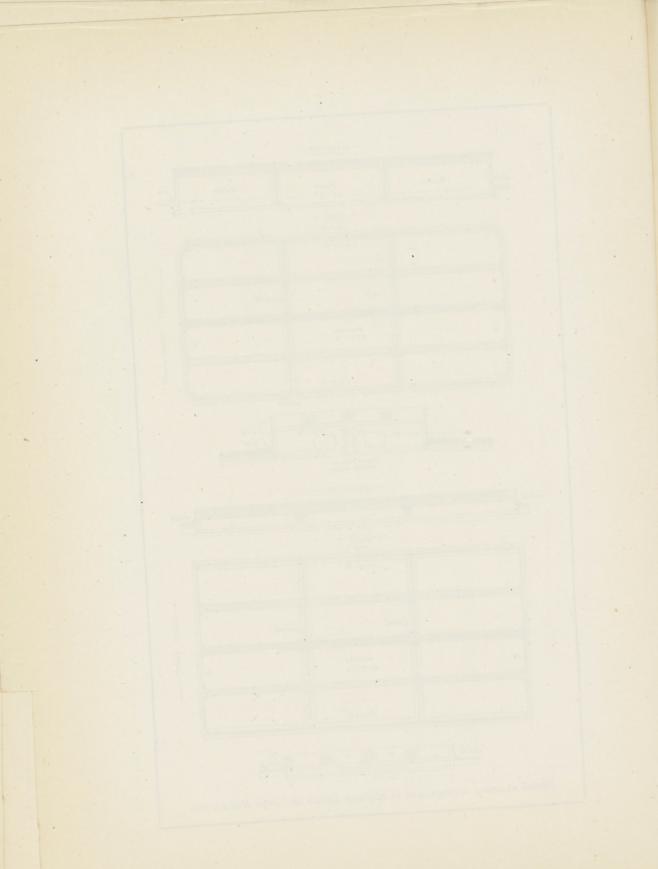

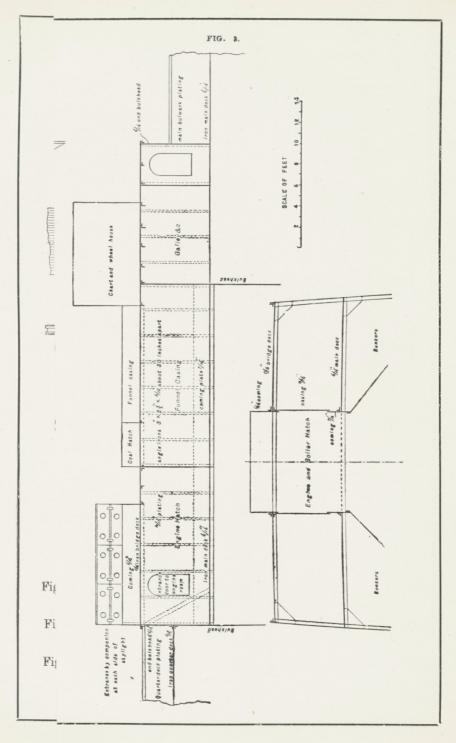



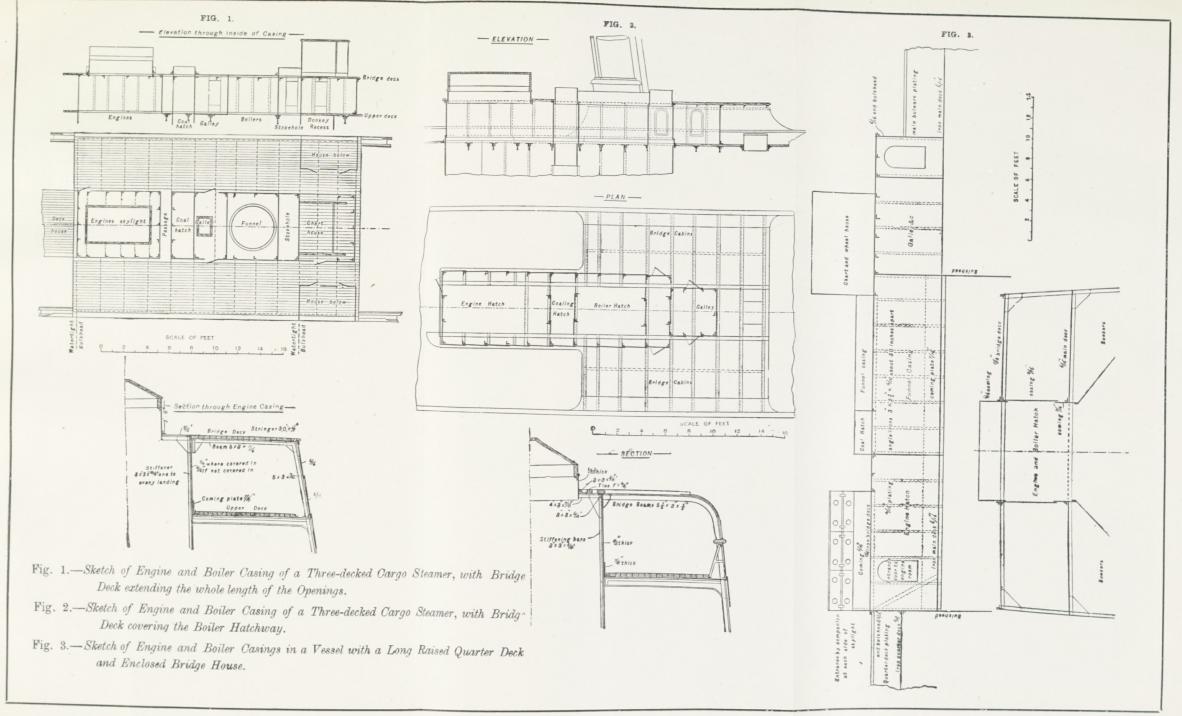

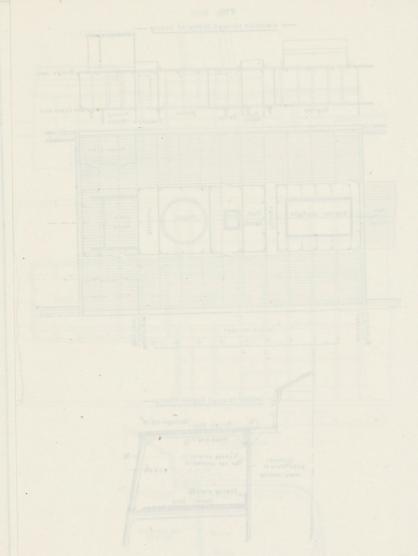


Yig. 1.—Sketch of Engine and Beder Casing of a Three-decked Cargo S. Deck extending the whole length of the Openings.

Fig. 2.—Steach of Engine and Boiler Casing of a Three-decked Cargo S. Deck covering the Boiler Hatchway,

Fig. 3.—Sketch of Engine and Boiler Oaxings in a Vessel with a Long-1 and Enclosed Bridge House.




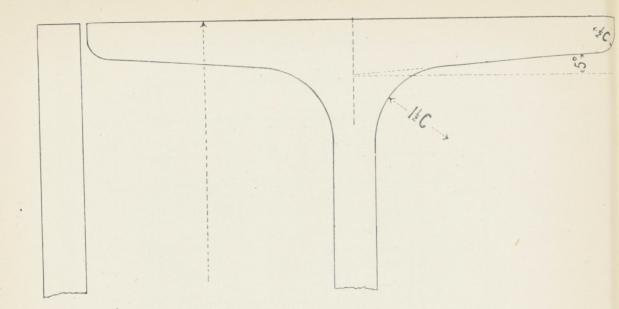


SKETCHES SHOWING WIDTH OF BULB OF BULB PLATES, T BULBS, AND BULB ANGLES.

The depth in inches D of the section to be the base from which to deduce the other dimensions. The widths of the bulbs to be $2\frac{1}{2}$ C for bulb angles, and $3\frac{1}{4}$ -C for bulb plates and bulb tees—where C is $\frac{D+3}{20}$ in the case of bulb angles, and $\frac{D+1}{20}$ for bulb plates and bulb tees. The form of the bulbs to be in accordance with the sketches.


The standard thickness for regulating the width of bulb of beams and bars whose depth is not an exact number of inches should correspond to the depth in inches next below the actual depth, thus—for T beams and bulb plates $10\frac{1}{2}$ inches deep, the standard thickness to be used in determining the dimensions of the bulb should be $\frac{10+1}{20}$ or $\frac{11}{20}$.

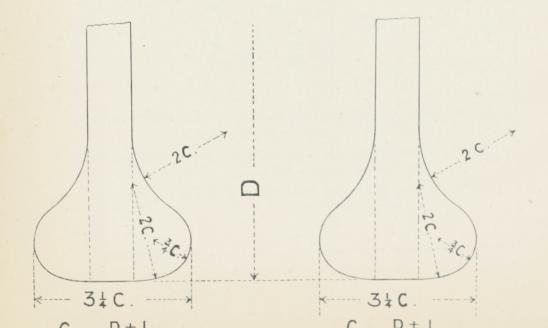


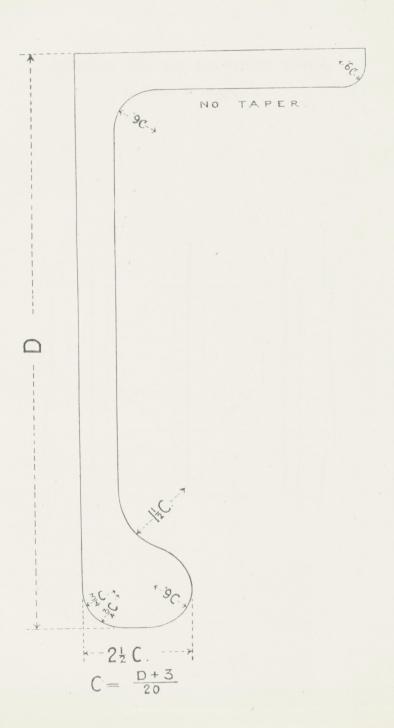

DIAMOND SHAPED BULKHEAD LINER.

See Section 22, paragraph 6.

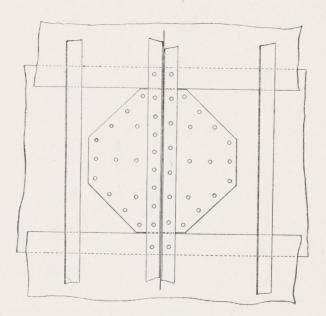

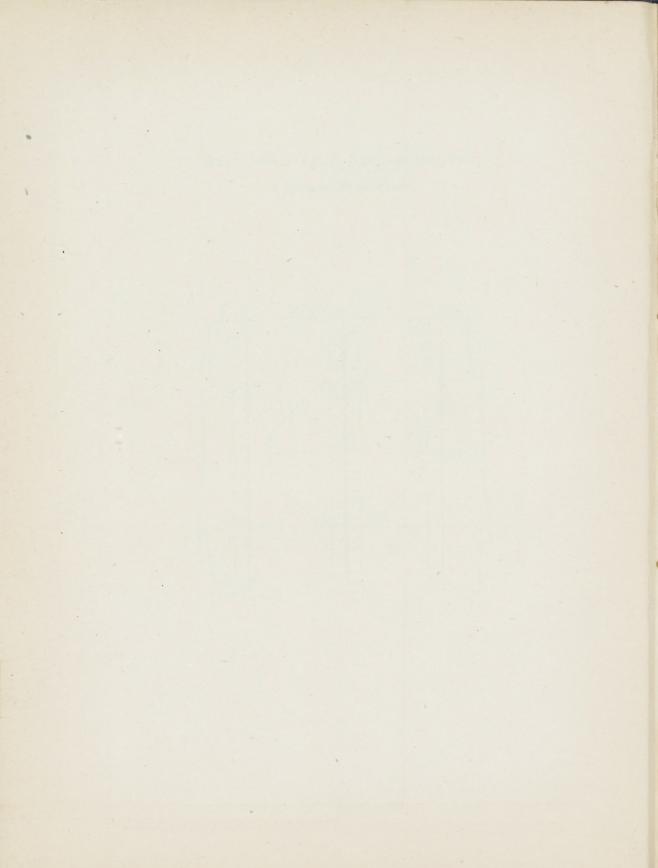

CHAINS AND ANCHORS FOR SAILING VESSELS.

Minimum Weights of Anchors, ex. Stock; Sizes, Lengths and Weights of Chains, and the Proof Strain to which they are to be tested per Chain Cables and Anchors Acts.

Also Sizes and Lengths

TABLE 22.

1		GROS8			AN	СНО	RS.			T						CH	AIN	CAE	BLES,	HAV	VSER	RS, &	cc.							GROSS			
	Numbers for	TONNAGE	-	BOWER	ANCHORS (b) (d).	STREAM	AND KED	OGE AN	CHORS.			7						STREAM, CH.	AIN OR S	TEEL WIF	RE (e) (g)		12	TOWLINE	HEMP (OR STEEL	WIRE	HAWSERS	TONNAGE LESS CREW		Numbers for IRON AND STEEL	
iling	IRON AND STEEL Vessels.	LESS CREW SPACE.	NUMBER.		Ex. Stock.			Ex. Sto	ock.			STUD-	CHAIN CAI	BLES (e) (f	f) (h).					CHAIN.			STEEL W	TRE (i)		HEMP.	STEEL V	WIRE.	AND WARPS. 90 fathoms	SPACE.		Vessels.	
of Sa	See Note (a).	See Note	am.	Weight	Test. *	Collective Weight.	Ctucan	Toot 4	Vodgo	Toot W	Longth	Minimum	Proved to Statutory	Breaking	Minimur	n Weight.	Length.	Size.		Minimum			Size.	Breaking Test	Length.	Size.	Size.	Break- ing Test	of each.	See Note		See Note (a)	
List			Bow Stre	Weight	1030.75	Weight.	stream.	Test. *	Acuse.	1650. 75	neng th.	Size.	Test.	Test.				-	Stud Lin	-	Short	-		1000		Inches.	Inches.	Tons.	Ins. Ins.	Tons.			
the		Tons.	0 1 1	Owts.	Tons.	Owts.	Owts.	Tons.	Owts.	Tons.	Fathoms.	Inches.	Tons.	Tons.		qrs. lbs.	Fathoms.	Inches.	Owts. qrs.	lbs.	Owts. qrs		Inches.	Tons.	Fathoms.	5	Inches	_	3 —		75 a	1900 and 25	500
in in	a 1900 and 2500		2 1 1	$\frac{3_{\frac{1}{2}}}{41}$	$\frac{5\frac{18}{20}}{610}$	7	34	_	$\frac{1}{2}$		120	16	85	$12\frac{3}{4}$	29 34	9 7	45	16	6 2	0	7 1	0			75	$5\frac{1}{2}$	_	_	3 —	75 ,, 1	00 b	2500 ,, 31	100
s Tab	b 2500 ,, 3100	75 ,, 100		41/4	$6\frac{12}{20}$	81	14	- 010	2	-	120	16	101/8	$15\frac{1}{8}$		2 2	15	8	6 2	0	7 1	0			75	$5\frac{1}{2}$	-	_	3 —	100 ,, 1	25 c	3100 ,, 36	350
hth c	c 3100 ,, 3650	100 ,, 125		5	$\frac{7\frac{7}{20}}{20}$	10	$\frac{1\frac{1}{2}}{1}$	318	3 4	_	135	16	117/8	$\frac{17\frac{8}{10}}{205}$	45	1 11	45	16	6 2	0	7 1	0			75	6			$3\frac{1}{2}$ —	125 ,, 1	50 d	3650 ,, 42	200
e eig	d 3650 ,, 4200	125 ,, 150			8	$11\frac{1}{2}$	$1\frac{1}{2}$	$3\frac{18}{20}$	4	-	165	16	$13\frac{3}{4}$	$20\frac{5}{8}$	64	1 26	45	16	8 0	0	8 3	3 0	2	7	75	61	_	_	4 -	150 ,,	75 e	4200 ,, 47	700
in th Vesse	e 4200 ,, 4700			61	815	13	2	$\frac{4\frac{10}{20}}{415}$	1	-	165	16	$15\frac{8}{10}$	23_{10}^{7}			45	16	8 0	0	8 3	3 0	2	7	75	61	_	_	4 —	175 ,, 2	00 f	4700 ,, 51	150
s of	f 4700 ,, 5150			$7\frac{1}{4}$	$9\frac{9}{20}$	$\frac{14\frac{1}{2}}{2}$	$\frac{2^{1}_{4}}{2^{1}}$	$\frac{4\frac{15}{20}}{5}$	1		165	1 1 1	18	27	95	0 17	45	16	9 3	0	10 2		21	91	75	7		_	4 —	200 ,, 2	50 g	5150 ,, 60	000
s prin	g 5150 ,, 6000	200 ,, 250		81/4	$10\frac{7}{20}$	$23\frac{1}{2}$	$2\frac{1}{2}$	9	14		165	1_{16}	$20\frac{3}{10}$	$30\frac{4}{10}$	126	1 0	45	16	9 3	0	10 2		21	91	75	$7\frac{1}{2}$	_	_	5 —	250 ,, 3	00 h	6000 ,, 68	800
etteri t nu	h 6000 ,, 6800			10	12	$28\frac{1}{2}$	$\frac{3\frac{3}{4}}{4}$	$6\frac{3}{20}$	13/4	$4\frac{4}{20}$	195	$1\frac{2}{16}$	$22\frac{3}{4}$	341		0 16	60	16	14 2	7	15 8		234	151	75	8	_	_	$5\frac{1}{2}$ —	300 ,, 3	350 i	6800 ,, 78	550
ith I	<i>i</i> 6800 ,, 7550	300 ,, 350		12	$\frac{13\frac{17}{20}}{15.0}$	341/4	4	$0_{\overline{20}}$	2	$\frac{4\frac{10}{20}}{7}$	195	1 3 1 6	$\frac{25\frac{3}{8}}{991}$	38	168	0 0	60	16	14 2	7	15 8		$\frac{2^{3}}{4}$	151	75	8		_	$ 5\frac{1}{2} $ —	350 ,, 4	00 j	7550 ,, 82	250
nd w Equi	j 7550 ,, 8250			131	$15\frac{3}{20}$	$38\frac{1}{2}$	43	$7\frac{2}{20}$	$2\frac{1}{2}$	5	210	14 1 5	$28\frac{1}{8}$	$42\frac{1}{8}$ $46\frac{1}{9}$		2 12	60	16	17 1	3	18 3		234	151	75	81	_	_	6 —	400 ,, 4	150 k	8250 ,, 89	900
respo	k 8250 ,, 8900				$16\frac{14}{20}$	$43\frac{1}{2}$	01/4	$7\frac{11}{20}$	$2\frac{1}{2}$	5	210	15	31	51		0 21	60	16	17 1	3	18		23	151	75	9	_	_	$ 6\frac{1}{2} $ —	450 ,, 8	500 l	8900 ,, 90	600
s cor	l 8900 ,, 9600				-	4/3/4	$\frac{5\frac{1}{2}}{21}$	$\frac{\frac{16}{20}}{0}$	$\frac{2\frac{3}{4}}{21}$	$\frac{5\frac{5}{20}}{514}$	240	1 6 1 7	$\frac{34}{37\frac{1}{8}}$	555		0 19	60	16	20 1	11	22 (0 11	3	18	75	91/2		_	7 —	500 ,,	300 m	9600 ,, 108	800
umber o ind	m 9600 ,, 10800				19	$51\frac{1}{4}$	$6\frac{1}{2}$	δ_{20}^{13}	31/4	$5\frac{14}{20}$	240	1,76	40.0	$58\frac{7}{10}$	276	2 14	60	1.0	20 1	11		0 11	3	18	90	10	$3\frac{1}{4}$	22	7 4	600 ,,	700 n	10800 ,, 120	000
nt nt ook t	n 10800 ,, 12000				$21\frac{12}{20}$	60	1 7 4	$9\frac{3}{20}$	31/2	$\frac{5\frac{1}{2}\frac{8}{0}}{6}$	240		$40\frac{5}{10}$	61.4	336	0 0	60	16	23 1	17	25	1 17	$3\frac{1}{4}$	22	90	10	$3\frac{1}{4}$	22	8 5	700 ,, 8	300 o	12000 ,, 13	200
ipme ter B	o 12000 ,, 13200				2310	67	8	$10\frac{2}{20}$	4	$\frac{6\frac{7}{20}}{612}$	270		$\frac{43\frac{9}{10}}{47.5}$	66.5	359	1 9	75	14	29 1		31 2	2 0	31	22	90	10	$3\frac{1}{4}$	22	8 5	800 ,,	900 p	13200 ,, 14	400
Equ	p 13200 ,, 14400				$25\frac{3}{20}$	$72\frac{3}{4}$	$8\frac{1}{2}$	$10\frac{12}{20}$	41	$\begin{array}{c c} 6\frac{12}{20} \\ 617 \end{array}$	270		$51\frac{1}{4}$	$71\frac{3}{4}$		3 4	75	10		11		1 11	31	26	90	101	$3\frac{1}{4}$	22	$9 \ 5\frac{1}{2}$	900 ,, 1	000 9	14400 ,, 15	500
g the	q 14400 ,, 15500				2618	79	$ 8\frac{3}{4} $	$10\frac{17}{20}$	41/2	$\frac{6\frac{17}{20}}{7^{2}}$	270		$55\frac{1}{8}$	$77\frac{1}{8}$		3 0	75	10		11	36	1 11	31/2	26	90	$10\frac{1}{2}$	$3\frac{1}{4}$	22	$9 \ 5\frac{1}{2}$	1000 ,, 1	200 r	15500 ,, 17	600
s in	r 15500 ,, 17600		_		2812	801	9 1	1120	44	711	270		$59\frac{1}{8}$	823	447			1	38 1	0	41	1 0	334	29	90	11	$3\frac{1}{2}$	26	$9\frac{1}{2}$ 6			17600 ,, 19	
pre	s 17600 ,, 19600			32	$30\frac{2}{20}$		101/2					113 114	$63\frac{1}{4}$	T		1 18	1		38 1				$3\frac{3}{4}$	29	90	11	$3\frac{1}{2}$	26	10 6	1400 ,, 1	600 t	19600 ,, 21	.600
etters	$\begin{bmatrix} t & 19600 & ,, & 21600 \\ u & 21600 & ,, & 23400 \end{bmatrix}$				$31\frac{12}{20}$							114 115	1	$94\frac{5}{10}$					43 1				4	33	90	11	$3\frac{1}{2}$	26	$10\frac{1}{2}$ $6\frac{1}{2}$	_		21600 ,, 23	
alic 1	v 23400 ,, 25100		3 1 1						_		270	115		$\frac{01_{10}}{100_{10}^{8}}$			_		43 1					33	90	12	4	33	11 7	-		23400 ,, 25	
he Its	w 25100 ,, 29400		3 1 1			$108\frac{1}{4}$		$13\frac{7}{20}$					76.5	107.1	573	2 14	100	$1\frac{2}{16}$	64 2	27	68 (0 27	41/4	35	90	12	4	33	11 7	-		25100 ,, 29	
. — T	x 29400 ,, 33400		3 1 1 3 1 1		$35\frac{15}{20}$		12		Al			2 1 2 3	861	120,5	717	2 (120	$1\frac{2}{16}$	77 2	21	83	1 21	41/4	35	90	13	$4\frac{1}{2}$	39	12 8	_		29400 ,, 33	
N.B.	y 33400 ,, 37200		3 1 1				131					$\frac{2\frac{3}{16}}{25}$	961	1343	800	3 14	120	$1\frac{3}{16}$	86 3	12	93 (0 12			90	13	41/2	39	12 8	-		33400 ,, 37	
	z 37200 ,, 40800		3 1 1				104	$10\frac{14}{20}$	Q1	1012	300	$2\frac{5}{16}$	1011	142.1	844	1 (120	$1\frac{4}{16}$	96 0	0	103	0 0	$4\frac{3}{4}$	43	120	14	434	43	13 9	-	z	37200 ,, 40	800
			0 1	10	$41\frac{2}{20}$	191	17	1020	0 2	1020	300	216	1012	110	-			1							-								

Lloyd's Register of Shipping, 2, White Lion Court, Cornhill. 14th December, 1899.

For Equipment of Trawlers and Notes see other side.

		Equipment	fo	r SA	ILIN	G AN	ND S	TEA	М	TR	AWI	ER	S.					
	ERED U.D. NAGE.	PLATING NUMBER FOR		AN	CHORS.			CHAI	N (e	e) (f)	(h).			HAWS	SERS.	WARPS.		
Sailing Trawlers.	Steam Trawlers.	IRON AND STEEL STEAM TRAWLERS.	No.	1st.	2nd.	3rd.	Length Diameter. Stud Link, Shor			ort L	for he	Length	Size.	Length	Size.			
			-	Cwts. ex. Stock.	Cwts. ex. Stock.	Cwts. ex. Stock.	Fathms.	Ins.	-						Fathms.	Ins.	Fathms.	Ins.
$50_{\mathrm{under}}^{\mathrm{and}}$ 65	65 and 80	2450 and 2800	3	3	3	$1\frac{3}{4}$	60	$\frac{12}{16}$	17	1	3	18	3	3	60	5	60	$2\frac{1}{2}$
65 ,, 80	80 ,, 100	2800 ,, 3250	3	$3\frac{1}{2}$	$3\frac{1}{2}$	2	60	13 16	20	1	11	22	0	11	60	$5\frac{1}{2}$	60	3
80 ,, 100	100 ,, 120	3250 ,, 3650	3	4	4	$2\frac{1}{4}$	60	14 16	23	1	17	25	1	17	60	$5\frac{1}{2}$	60	3
100 ,, 120	120 ,, 140	3650 ,, 4000	3	$4\frac{1}{4}$	4	$2\frac{1}{2}$	60	14 16	23	1	17	25	1	17	60	$5\frac{1}{2}$	60	$3\frac{1}{2}$
120 ,, 140	140 ,, 160	4000 ,, 4350	3	$4\frac{1}{2}$	4	$2\frac{1}{2}$	75	1.5 1.6	33	3	11	36	1	11	60	$5\frac{1}{2}$	60	$3\frac{1}{2}$
_	_	4350 ,, 4700	3	$4\frac{3}{4}$	$4\frac{1}{4}$	$2\frac{1}{2}$	90	15 16	40	2	13	43	2	13	60	$5\frac{1}{2}$	60	4
7/ - 100	_	4700 ,, 5000	3	5	$4\frac{1}{2}$	$2\frac{1}{2}$	90	1	45	3	17	49	2	0	60	$5\frac{1}{2}$	60	4
_	_	5000 ,, 5300	3	$5\frac{1}{4}$	$4\frac{3}{4}$	$2\frac{1}{2}$	90	1	45	3	17	49	2	0	60	6	60	$4\frac{1}{2}$
_		5300 ,, 5600	3	$5\frac{1}{2}$	5	$2\frac{3}{4}$	105	$1\frac{1}{16}$	60	2	18	64	3	12	60	6	60	$4\frac{1}{2}$
-	-	5600 ,, 5900	3	$5\frac{3}{4}$	$5\frac{1}{4}$	3	105	116	60	2	18	64	3	12	60	6	60	5

The Anchors and Chains to be tested at a Public Testing Machine in accordance with the statutory tests.

* The tests of anchors in this Table are approximate tests: or as near the Statutory tests as can be expressed in tons and aliquot parts

By Section 39 of the Rules for the Building and Classification of *Iron and Steel Vessels*, it is provided that "The equipment is to be regulated by the *Number* produced by the sum of the measurements of the half-moulded breadth of the vessel at the middle of the length, the depth from the upper part of keel to the top of the upper-deck beams, with the normal round-up, and the girth of the half-midship frame section of the vessel, measured from the centre line at top of keel to the upper deck stringer plate, multiplied by the length of the vessel, for a one, two, and three-decked vessel, and for a spar-decked vessel."

For a vessel with a poop, top-gallant forecastle, or a raised quarter-deck, the equipment number to be increased one fifteenth beyond that which it would be if she were flush-decked.

(b) In order to meet the requirements of different trades, the weights of Anchors as given in the Table may be modified as under:—
Where two Bower Anchors only are required, one of them may be 7½ per cent. lighter than the weight set forth in the Table, provided the collective weight of the two Anchors is equal to that given in the Table.

Where three Bower Anchors are required, one of them may be 15 per cent., and another 7½ per cent. lighter than the weight set forth in the Table, provided the collective weight of the three Anchors is equal to that given in the Table, but in no case may the best Bower Anchor be lighter than prescribed in the Table, nor the third Bower be lighter than is allowed by this footnote.

All Anchor Stocks must be of acknowledged and approved description, and be one-fourth the weight of the anchor given in the Table.

(4) All Anchors, including Stream and Kedge Anchors, exceeding 168 lbs. in weight, ex. Stock, to be tested according to the requirements of the Act of Parliament, and the Certificates of Test produced.

(e) The Chain Cables and Stream Chains to be tested in all cases according to the requiremens of the Act of Parliament, and the Certificates of Test produced.

- (f) There should be included in the weights, 2 End Shackles to each Cable; that is 4 for each outit which contains two Cables.
- (g) There should be included in the weights, 2 End Shackles to each Stream Chain.
- (In) Unstudded close-link Chains will be admitted as Cables, if proved to two-thirds the Test recired for Stud-link Chains, for the tensile strain, and 100 per cent. above the tensile strain for the breaking strain.

(i) When steel wire Towlines or Hawsers are adopted, see notes (i) below.

Where a departure from the requirements of this Table is proposed by an Owner, the same suld be submitted in the first place for the consideration of the Committee.

(i) STEEL WIRE TOWLINES, HAWSERS AND WARPS.

(i) When steel wire towlines, hawsers, or warps are adopted, a short length of each of the wires comping the towline, &c., will be required, after being galvanised, to withstand a tensile stress equivalent to that set forth in Table 22 and the aggrate strength of the wires must not be less than ten per cent. in excess of that stress.

Each wire will be required to be capable of being twisted around itself not less than eight tins, and of being untwisted and straightened

Each manufacturer to be required to provide on his premises machines suitable for satisfacorily making the foregoing tests, and the works to be at all times open to the inspection of the Society's Surveyors, who are to be empowered to retst any hawser or towline for which a certificate has been issued by the manufacturer.

Printed Forms of Certificates, approved by the Committee, to be given by the Manufactures of Steel Wire Hawsers, will be supplied to them upon application to the Secretary.

20th December, 1883.

SPECIAL FLEXIBLE STEEL WIRE ROPE.

When an Owner prefers to substitute special flexible steel wire ropes for steel wire rope of ordinary make, the sizes may be reduced in accordance with the following table, provided each flexible rope be formed of six strands with 24 vires in each strand, and that the diameter of each wire is $\frac{1}{36}$ th of the circumference of the rope, and the ropes are capable of withstanding the breaking tests shown in the table:

FLEXIBLE STEEL WIRE ROPE. Size. Breaking Test.		CORRESPONDING SIZES REQUIRED BY TABLE 22.	WIRE	ROPE.	CORRESPONDING SIZES REQUIRED BY TABLE 22.
Inches.	Tons.	Inches.	Inches.	Tons.	Inches.
12	8.9	2	31	35.5	41
2	11.7	21	31	41.0	41
21	18.2	21	4)	52.5	41
21	18.2	3	44	59.0	5
21	22.0	31	44	65.5	51
3	26.2	84	5	73.0	51
31	30.7	34	5.5	88.0	6
31	35.5	4	6	114.0	7

15th December, 1898.

Extract from the Rules, Section 32.

Tonnage for Regulating the Scantlings and Equipment (as regards Anchors, Chains, &c.) of Wood and Composite Vessels.

In flush-decked vessels having either one, two or three decks (not being spar or awningdecked), the tonnage under the upper deck, without abatement of the tonnage of the space for the crew, or for the propelling power of steam vessels, is to regulate all the scantlings of the hull, and also the equipment of the vessel, as regards anchors, chains, warps, &c.

† In vessels having a raised quarter deck, or a poop, or top-gallant forecastle, or deck houses, or awning-deck, or spar deck, the total tonnage below the tonnage deck is to regulate the scantlings of the hull, but the register tonnage, as cut on the main beam of sailing vessels and of steam vessels, with the addition of the tonnage of the space required for propelling power, is to regulate the equipment.

But in vessels where the tonnage of the erections above the tonnage deck is less than that allowed for crew space, then the difference between the tonnage of these erections and the tonnage of the space allowed for crew is to be added to the register tonnage, cut on the main

beam, for the tonnage that is to regulate the equipment.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

CHAIN CABLES.

Testing to Breaking Strain.

"Chains tested under the Chain Cable and Anchor Act of 1864, at a Machine recognised by the Committee, will be accepted for any Vessel built, commenced, or contracted for prior to the 1st July, 1872; and all Vessels built, commenced, or contracted for after the 30th June, 1872, will be required to be supplied with Chains tested in conformity with the requirements of the New Act.'

By order of the Committee, BERNARD WAYMOUTH,

Secretary.

2. White Lion Court, Cornhill, London, E.C. 1st January, 1873.

PROVING ESTABLISHMENTS.

The following Proving Establishments are recognised by the Committee of Lloyd's Register for the Testing of Anchors and Chains while licensed by the Board of Trade for that purpose -

London—Trinity Proving HouseSuj	perintender	nt, Mr. L. R. Isitt.
*Netherton—Lloyd's Proving House	ditto	Mr. H. Green.
*Tipton—Lloyd's Proving House	ditto ditto	Mr. W. J. Relf. Mr. C. E. Perrins.
*Low Walker—Lloyd's Proving House	ditto ditto	Mr. J. A. Danks. Mr. T. Tindale.
*Chester (Saltney)—Lloyd's Proving House	ditto	Mr. A. S. Jack.
Assistant	ditto	Mr. J. Littler.
*Glasgow—Lloyd's Proving House	ditto	Mr. E. Seedhouse.
*Cardiff—Lloyd's Proving House	ditto	Mr. G. W. Penn.
SUNDERLAND—River Wear Commission, Public Test	ditto	Mr. H. T. Welford.
And any other Machine will be recognised by the Committee a	which is or	may be hereafter duly

ensed by the Board of Trade for the purpose of testing Anchors and Chains. N.B. - Vessels supplied with Anchors and Chain Cables tested at any of the Proving Establishments marked with an asterisk (*) in the above list, will have the notation of "Lloyd's A. & C.P." in the Register Book, signifying that the Anchors and Chain Cables have been tested at a machine under the control of the Committee of Lloyd's Register of Shipping.

The following Machines have been recognised by the Committee for the testing of Anchors and Chain Cables supplied to foreign owned vessels (see Section 39 of the

Société Anonyme des Fabriques de Chaines & Piéces de Forge de Belgium Heppignies, near Fleurus. Government Establishment at Copenhagen. DENMARK .. France E. Turbot, Anzin (Nord). " Chantiers de la Loire, Nantes. Vve. E. Couillard, Succ., Havre.

...... Dorémieux, Fils et Cie., St. Amand. E. Davaine, St. Amand les Eaux (Nord).

Marrel Frères, Capelette, Marseilles.

............ Société Anonyme des Chaines en Acier Sans Soudure, Terrenoire, near St. Etienne (Usine de la Massardière).

GERMANY Hochfelder Walzwerk, Duisberg.

HOLLAND Koninklijke Nederlandsche Grofsmederij at Leyden. SWEDEN Government Establishment at Kongl. Tekniska Högskolan, Stockholm.

United States...... Messrs. Bradlee & Co.'s Works at Philadelphia. " " Messrs. J. B. Carr & Co., Troy, N.Y.

" Lebanon Chain Works, Lebanon, Pennsylvania. ", The Logan Iron and Steel Co. of Burnham, Pennsylvania.
", The Baldt Anchor Co., Chester, Pa. (for the testing of Anchors only).

...... West End Rolling Mills, Lebanon, Philadelphia.

es according to the requirements of the Act of Parlia

each Cable; that is 4 for each outfit, which contains o each Stream Chain.

f proved to two-thirds the Test required for Stud-lin st'ain.

s (i) below. proposed by an Owner the same should be submitted

correspond with letters printed in the seventh col vessels per this Table.

VLINES, HAWSERS AND WARPS.

short length of each of the wires composing the tow hat set forth in Table 22, and the aggregate strength

1 round itself not less than eight times, and of being u

Wes machines suitable for satisfactorily making the fore who are to be empowered to retest any hawser or tow

he, to be given by the Manufacturers of Steel Wire H

IBLE STEEL WIRE ROPE.

eel wire ropes for steel wire rope of ordinary make, e be formed of six strands with 24 wires in each str i are capable of withstanding the breaking tests shown i

IDING JIRED E 22.	WIRE	LE STEEL ROPE.	CORRESPONDING SIZES REQUIRED BY TABLE 22.	
	Inches.	Tons.	Inches.	
	31	35.5	$4\frac{1}{4}$	1
	$3\frac{3}{4}$	41.0	$4\frac{1}{2}$	
	$4\frac{1}{4}$	52.5	$\begin{array}{c} 12\\4\frac{3}{4}\\5\end{array}$	4
	$4\frac{1}{2}$	59.0	5	
	434	65.5	514	
	5	73.0	$5\frac{1}{2}$	
	$5\frac{1}{2}$	88.0	6	
	6	114.0	. 7	
	1			

Numbers for

LONNYGE GEORE

STREAM, CHAIN OF STEEL WIRE

CHAIN CYBLES VAH

chors, and the links of the Chains to be of unexc , and the Proof Strain to which they & Act.

Rules, Section 32.

s and Equipment (as regards Anchors, and Composite Vessels.

two or three decks (not being spar or awningithout abatement of the tonnage of the space for vessels, is to regulate all the scantlings of the gards anchors, chains, warps, &c.

, or a poop, or top-gallant forecastle, or deck I tonnage below the tonnage deck is to regulate nage, as cut on the main beam of sailing vessels nage of the space required for propelling power,

ections above the tonnage deck is less than that ween the tonnage of these erections and the added to the register tonnage, cut on the main aipment.

ISH AND FOREIGN SHIPPING.

CABLES.

eaking Strain.

Anchor Act of 1864, at a Machine recognised seel built, commenced, or contracted for *prior* menced, or contracted for *after* the 30th June, ns tested in conformity with the requirements

er of the Committee,
BERNARD WAYMOUTH,
Secretary.

ABLISHMENTS.

recognised by the Committee of Lloyd's and Chains while licensed by the Board

	Superintendent,	Mr. L. R. Isitt.
ıy, 1875.	1:++0	Mr. H. Green.
Assistan	1:140	Mr. W. J. Relf. Mr. C. E. Perrins.
Assistan	7:44.	Mr. J. A. Danks. Mr. T. Tindale.
	. ditto	Mr. A. S. Jack.
Assistan	t ditto	Mr. J. Littler.
	. ditto	Mr. E. Seedhouse.
	ditto	Mr. G. W. Penn.
Test	ditto	Mr. H. T. Welford

CHAINS AND ANCHORS FOR STEAM VESSELS.

Minimum Weights of Anchors, ex. Stock and Stockless; Sizes, Lengths and Weights of Chains, and the Proof Strain to which they are to be tested per Chain Cables and Anchors Act.

Also Sizes and Lengths of Towlines, Hawsers and Warps.

The Anchors, and the links of the Chains to be of unexceptionable form and proportions.

			A.			The Anchors, and the links of the Chains to				
Numbers for	GROSS			ANCHORS.	1	CHAIN CABLES	S, HAWSERS, &c.		GROSS	
IRON AND STEEL	TONNAGE LESS CREW	NUMBER.	BOWER AND	HORS (b) (d)	STREAM AND KEDGE ANCHORS (c)	STUD-CHAIN CABLES (e) (f) (h)	STEEL WIRE (e) (g) TOWLINE: HEMP OR STEEL WIRE (i)		TONNAGE	Numbers for
Vessels, See Note (a)	SPACE.	NUMBER.	Ex. Stock.	Stockless.	Ex Stock.	CHAIN CABLES (6) (1) (1)		HAWSERS AND WARPS.	LESS CREW SPACE.	IRON AND STEEL, Vessels,
See Note (a)	See Note†	eam.	Weight, Test. * Collective	Weight. Test. * Collective	Stream. Test. * Kedge. Test. *	Mini- Proved to mum Statutory Breaking Test. Minimum Weight. Length. Size. Minimum Weight.	im Weight. Break-Length	Size of Size of Length	See Note	See Note (a)
		Bor	Weights	Weight.		Stud Link.	Short Link. Test. Size. Size. Size.	each. each. of each.		
a 2750 and 3750	75 and 112	9 1 1	Cwts. Tons. Cwts.	Cwts. Tons Cwts.	Cwts. Tons. Cwts. Tons.	Ins. Tons. Tons. Owts. qrs. lbs. Fthms. Inches. Cwts. qrs. lbs.		Ins. Ins. Fathms.	Tons.	
			$3\frac{1}{2}$ $5\frac{18}{20}$ 7	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	4 - 2 -	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$		3 - 90	andst	a 2750 and 3750
b 3750 ,, 4630		2 1 1	$\frac{4\frac{1}{4}}{6\frac{12}{20}} = \frac{8\frac{1}{2}}{6\frac{1}{2}}$	$5\frac{1}{4}$ $7\frac{1}{20}$ $10\frac{1}{2}$	$\frac{1_{\frac{1}{4}}}{1_{1}} - \frac{1}{2} - \frac{1}{2}$	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$		4 - 90	112 ,, 150	b 3750 ,, 4630
c 4630 ,, 5420		2 1 1	$5 7\frac{7}{20} 10$	$6\frac{1}{4}$ $8\frac{10}{20}$ $12\frac{1}{2}$	$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	$\frac{13}{16}$ $11\frac{7}{8}$ $17\frac{8}{10}$ 45 3 3 45 $\frac{9}{16}$ 8 0 0		4 — 90	"	c 4630 ,, 5420
d 5420 ,, 6150		2 1 1	$5\frac{3}{4}$ 8 $11\frac{1}{2}$	$7\frac{1}{4}$ $9\frac{9}{20}$ $14\frac{1}{4}$	$\begin{vmatrix} 1_{\frac{1}{2}} & 3_{\frac{1}{2}0} & \frac{3}{4} & - \end{vmatrix}$	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$		4 — 90	188 " 225	d = 5420 ,, 6150
e 6150 ,, 6840		2 1 1	$6\frac{1}{2}$ $8\frac{15}{20}$ 13	$8\frac{1}{4} \left 10\frac{7}{20} \right 16\frac{1}{4}$	$ 2 \frac{4\frac{10}{20}}{1} 1 -$	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	10 2 0 2 4 9 75 7 - -	5 - 90	225 ,, 262	e 6150 ,, 6840
f 6840 ,, 7490		2 1 1	$7\frac{1}{4} 9\frac{9}{20} 14\frac{1}{2}$		$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	1 18 27 84 0 17 45 \frac{11}{16} 10 3 19	$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	$5\frac{1}{2}$ — 90	262 ,, 300	f 6840 ,, 7490
g 7490 ,, 8670		3 1 1	$8\frac{1}{4} 10\frac{7}{20} 23\frac{1}{2}$	$10\frac{1}{4} 12\frac{4}{20} 29\frac{1}{4}$	$2\frac{1}{2}$ 5 $1\frac{1}{4}$ -	$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	15 3 7 $2\frac{3}{4}$ $15\frac{1}{2}$ 75 $7\frac{1}{2}$ —	$5\frac{1}{2}$ — 90	300 ,, 375	g 7490 ,, 8670
h 8670 ,, 9770		3 1 1	10 12 28½	$12\frac{1}{2} 14\frac{6}{20} 35\frac{1}{2}$	$3_{\frac{3}{4}}$ $6_{\frac{3}{20}}$ $1_{\frac{3}{4}}$ $4_{\frac{4}{20}}$	$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	$18 \ 3 \ 3 \ 2\frac{3}{4} \ 15\frac{1}{2} \ 75 \ 8 \ - \ -$	6 — 90	375 ,, 450	h 8670 ,, 9770
<i>i</i> 9770 ,, 10790	450 ,, 525	3 1 1	$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	15 $16\frac{10}{20}$ $42\frac{3}{4}$	$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	22 0 11 3 18 75 81	6 _ 90	450 ,, 525	i 9770 ,, 10790
j 10790 ,, 11740	1000	3 1 1	$13\frac{1}{2} 15\frac{3}{20} 38\frac{1}{2}$	16 ³ 18 48	$4\frac{3}{4}$ $7\frac{2}{20}$ $2\frac{1}{2}$ 5	1_{16}^{4} 28_{8}^{1} 42_{8}^{1} 168 0 0 60 $\frac{13}{16}$ 20 1 11	$22 \ 0 \ 11 \ 3 \ 18 \ 75 \ 8\frac{1}{2}$	6 4 90	525 ,, 600	
k 11740 ,, 12620	600 ,, 675	3 1 1	$15\frac{1}{4} \ 16\frac{14}{20} \ 43\frac{1}{2}$	$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	$5\frac{1}{4}$ $7\frac{11}{20}$ $2\frac{1}{2}$ 5	$1_{\overset{5}{16}}$ 31 $46_{\overset{1}{2}}$ 185 2 12 60 $\frac{14}{16}$ 23 1 17	25 1 17 31 22 90 9	6 5 90	600 ,, 675	k 11740 , 12620
<i>l</i> 12620 ,, 13450	675 ,, 750	3 1 1	$16\frac{3}{4}$ 18 $47\frac{3}{4}$	$20\frac{3}{4} 21\frac{8}{20} 59\frac{1}{2}$	$5\frac{1}{2}$ $7\frac{16}{20}$ $2\frac{3}{4}$ $5\frac{5}{20}$	1_{16}^{6} 34 51 203 0 18 60 $\frac{14}{16}$ 23 1 17	25 1 17 3 22 90 9	6 5 90	675 ,, 750	
m 13450 ,, 15120	750 ,, 900	3 1 1	18 19 51 ¹ / ₄	$22\frac{1}{2}$ $22\frac{15}{20}$ 64	$6\frac{1}{2}$ $8\frac{15}{20}$ $3\frac{1}{4}$ $5\frac{14}{20}$	$1_{16}^{7} 37_{8}^{1} 55_{8}^{5} 222 1 17 60 \frac{15}{16} 27 0 9$		6 5 90	750 ,, 900	m 13450 ,, 15120
n 15120 ,, 16720	900 ,, 1050	3 1 1	$21 \ 21\frac{12}{20} \ 60$	$26\frac{1}{4} 25\frac{16}{20} 75$	$7\frac{1}{4}$ $9\frac{9}{20}$ $3\frac{1}{2}$ $5\frac{18}{20}$	1_{16}^{8} 40_{10}^{5} 58_{10}^{7} 242 0 5 75 $\frac{15}{16}$ 33 3 11		6 5 90		n 15120 , 16720
o 16720 ,, 18260	1050 ,, 1200	3 1 1	231 2310 67	$29\frac{1}{4}$ $28\frac{1}{20}$ $83\frac{3}{4}$	$8 \ 10^{\frac{2}{20}} \ 4 \ 6^{\frac{7}{20}}$	$1_{16}^{9} \ 43_{10}^{9} \ 61_{10}^{4} \ 298 \ 2 \ 19 \ 75 \ 1 \ 38 \ 1 \ 0$		6 5 90		o 16720 , 18260
p 18260 ,, 19780	1200 ,, 1350	3 1 1	1		81 1012 41 612	$1_{\overset{1}{1}\overset{0}{6}}$ $47_{\overset{5}{1}\overset{5}{0}}$ $66_{\overset{5}{1}\overset{0}{0}}$ 319 1 17 75 1 38 1 0				p 18260 ,, 19780
q 19780 ,, 21280	1350 ,, 1500	3 1 1		341 32 983	8 10 17 41 617	$1\frac{11}{116}$ $51\frac{1}{4}$ $71\frac{3}{4}$ 344 2 22 75 $1\frac{1}{16}$ 43 1 9				q 19780 , 21280
r 21280 ,, 24220	1500 ,, 1800	3 1 1	30 2812 851		1 20 2 20	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$				r = 21280 , 24220
s 24220 ,, 27140						$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	52 0 6 41 35 00 19 4 33 9	of 7 2 of 6 90	1800 2100	e 24220 27140
t 27140 ,, 30020		3 1 1	$34 31\frac{12}{20} 97$			$egin{array}{c ccccccccccccccccccccccccccccccccccc$,, 2100	t 27140 , 30020
u 30020 ,, 32820		3 1 1	$36\frac{1}{2} 33\frac{8}{20} 104$			$\begin{array}{c ccccccccccccccccccccccccccccccccccc$				u = 30020 , 32820
v 32820 ,, 35450		3 1 1	38 3410 1081			$\begin{array}{c ccccccccccccccccccccccccccccccccccc$				v = 32820 , 35450
w 35450 , 39600		3 1 1	40 35\frac{15}{20} 114			2_{16}^{-1} 76_{10}^{-5} 107_{10}^{-1} 573 2 14 90 1_{16}^{-3} 65 0 16				v = 32820 , 39600 $v = 35450$, 39600
x 39600 ,, 43600	_	3 1 1				2_{16}^{2} 81_{4}^{1} 113_{4}^{3} 608 2 14 90 1_{16}^{3} 65 0 16				x = 39600 , 43600
y 43600 , 47400		3 1 1	$\begin{array}{ c c c c c c c c c c c c c c c c c c c$							
z 47400 ,, 51000	_	3 1 1	51 43 145 ¹			$2\frac{3}{16}$ $86\frac{1}{8}$ $120\frac{5}{10}$ 645 3 0 90 $1\frac{4}{16}$ 72 0 0				y 43600 ,, 47400
a† 51000 ,, 55000		3 1 1	$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	2 20		$2\frac{4}{16}$ $91\frac{1}{8}$ $127\frac{5}{10}$ 682 1 11 90 $1\frac{4}{16}$ 72 0 0				z 47400 ,, 51000
b+ 55000 ,, 59000	_	3 1 1	$\begin{array}{ c c c c c c c c c c c c c c c c c c c$			2_{16}^{5} 96_{4}^{1} 134_{4}^{3} 720 3 4 90 1_{16}^{5} 79 2 5				a† 51000 ,, 55000
c + 59000 ,, 63000	_	3 1 1	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$			$2_{16}^{6} 101_{10}^{5} 142_{10}^{1} 844 1 0 120 1_{5}^{5} 106 0 7$				b† 55000 ,, 59000
d† 63000 ,, 67000		3 1 1	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$			$2\frac{7}{16}106\frac{9}{10}149\frac{5}{8}890141201\frac{5}{16}10607$				c† 59000 ,, 63000
e+ 67000 ,, 71000		3 1 1				$2_{16}^{8} 112_{10}^{5} 157_{10}^{5} 936 0 3 120 1_{16}^{6} 116 0 10$				d+ 63000 ,, 67000
ft 71000 ,, 75000		3 1 1	002 0020 100			$2_{16}^{9} 116_{10}^{7} 163_{8}^{3} 983 0 0 120 1_{16}^{6} 116 0 10 1_{16}^{6}$				e† 67000 ,, 71000
g+ 75000 ,, 79000		3 1 1	$76_{2}^{1} 57$ 208 $76_{2}^{1} 57$ 218			$2\frac{10}{16}120\frac{9}{10}169\frac{1}{4}1135001201\frac{7}{16}12630$				f† 71000 ,, 75000
h+ 79000 ,, 83000	186			2 20	$27 \ 26\frac{1}{20} \ 14 \ 15\frac{12}{20}$	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	146 2 0 6 85 130 17 7 113 2	69 9 69 100		g† 75000 ,, 79000
i† 83000 ,, 87000		3 1 1	831 60 5 999	100 67 20 285	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$2\frac{12}{16}129\frac{3}{10}181$ 1247 0 0 120 $1\frac{84}{16}138$ 1 0	$146 \ 2 \ 0 \ 6 \ 85 \ 130 \ - \ 7 \ 113 \ 2$	60 2018 120		h† 79000 ,, 83000
j + 87000 ,, 91000		3 1 1	87 6117 940	100 7018 275	$30\frac{1}{2}$ 29 16 $17\frac{7}{20}$	$2\frac{13}{16}133\frac{4}{10}186\frac{3}{4}1304001201\frac{9}{16}149101$	159 0 0 6 85 130 — 7 113 2	100 2018 120		<i>i</i> † 83000 ,, 87000
k† 91000 ,, 95000	_	3 1 1	20 210	119 7012 311	$32\frac{1}{2} 30\frac{10}{20} 17 18\frac{5}{20}$	$2\frac{14}{16}137\frac{6}{10}192\frac{5}{8}1362001201\frac{110}{16}15930$	171 2 0 6 85 130 — 7 113 2	of 8 2 of 8 120		j† 87000 ,, 91000
l+ 95000 ,, 99000		3 1 1	94 65 200	113 722 322	34 3112 18 19	$2\frac{15}{16}141\frac{7}{10}198\frac{3}{8}1422001501\frac{11}{16}21520$	$231 \ 2 \ 0 \ 6\frac{1}{2} 100 \ 140 \ - \ 7\frac{1}{2} 128 \ 3$	of 8 2 of 8 120		k† 91000 ,, 95000
m† 99000 ,, 103000		3 1 1	971 66 6 970	$117\frac{1}{2}$ $73\frac{1}{20}$ 335	36 33 ₂₀ 19 19 ₂₀	3 $145\frac{8}{10}$ $204\frac{1}{10}$ 1482 0 0 150 $1\frac{12}{16}$ 231 2 0 2	$249 \ 2 \ 0 \ 6\frac{1}{2} \ 100 \ 140 \ - \ 7\frac{1}{2} \ 128 \ 3$	of 8 2 of 8 120		l+ 95000 ,, 99000
n†103000 ,, 107000		3 1 1	1001 67 9 999	122 757 348	$37\frac{1}{2} 34\frac{2}{20} 20 20\frac{15}{20}$	$3_{\frac{1}{16}} 149_{\frac{8}{16}} 209_{\frac{7}{10}} 1543 0 0 150 1_{\frac{13}{16}} 248 2 0 2$	$268 \ 2 \ 0 \ 6\frac{1}{2} 100 \ 140 \ - \ 7\frac{1}{2} 128 \ 3$	of 8 2 of 8 120		n† 99000 ,, 103000
o†107000 ,, 111000	_	3 1 1	104 6815 200	$120\frac{1}{2}$ $76\frac{1}{20}$ $357\frac{1}{2}$	$39 \ 35\frac{2}{20} \ 21 \ 21\frac{12}{20}$	$3_{\frac{2}{16}} 153_{\frac{3}{4}} 215_{\frac{1}{4}} 1607 0 0 150 1_{\frac{13}{16}} 248 2 0 2$	$268 \ 2 \ 0 \ 6\frac{1}{2} 100 \ 140 \ - \ 7\frac{1}{2} \ 128 \ 3$	of 8 3 of 8 120		n†103000 ,, 107000
p†111000 ,, 115000	_	3 1 1	1071 701 200	180 7726 3702	41 3610 22 227	$3_{\frac{3}{16}}157_{\frac{7}{10}}$ $220_{\frac{3}{4}}$ 1673 0 0 150 $1_{\frac{14}{16}}$ 265 3 0 2	$288 \ 0 \ 0 \ 7 \ 113 \ 140 \ - \ 7\frac{1}{2} \ 128 \ 3$			o†107000 ,, 111000
q†115000 ,, 119000		3 1 1	111 717 978	134 79 3831	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$3_{\frac{1}{16}} 161_{\frac{6}{10}} 226_{\frac{1}{10}} 1739 0 0 150 1_{\frac{114}{16}} 265 3 0 5$	$288 0 0 7 113 140 - 7_{\frac{1}{2}} 128 3$	of 8 3 of 8 120		p†111000 ,, 115000
r†119000 ,, 123000		3 1 1	1141 7214 200	139 8014 396	44 38 20 24 23 20	$3_{16}^{5} 165_{10}^{4} 231_{10}^{5} 1805 0 0 150 1_{16}^{15} 284 0 0 $	309 0 0 7 113 150 — 8 149 3	of 8 3 of 8 120		q†115000 ,, 119000
s†123000 ,, 127000) _	3 1 1	1181 74 4 220	148 8120 4072	46 3917 25 2418	$3_{\frac{6}{16}} 169_{\frac{1}{8}} 236_{\frac{3}{4}} 1874 0 0 150 1_{\frac{15}{16}} 284 0 0 36$	309 0 0 7 113 150 — 8 149 3	of 8 3 of 8 120		r†119000 ,, 123000
t †127000 ,, 13100		3 1 1	122 75.8 240	1501 8417 422	48 41 2 26 25 2 6	$3_{16}^{-7} 172_{4}^{8} 241_{10}^{8} 1947 0 0 150 2 299 1 0 3$	$330 \ 0 \ 0 \ 7\frac{1}{2}128 \ 150 \ - \ 8 \ 149 \ 3$	of 8 3 of 8 120		s†123000 ,, 127000
77 77 77			1020 548	1022 8420 4342	$ 49\frac{1}{2} 42\frac{1}{20} 27 26\frac{7}{20}$	$3_{16}^{8} 176_{10}^{4} 246_{10}^{9} 2020 0 0 150 2 299 1 0 3$	$330 \ 0 \ 0 \ 7\frac{1}{2}128 \ 150 \ - \ 8 \ 149 \ 3$	of 8 3 of 8 120	-	t† 127000 ,, 131000
Lloyd's Register of	f British and Fo	reign Si	hinning							

s Register of British and Foreign Shipping, 2, White Lion Court, Cornhill, E.C., 26th April, 1900.

		Equipment	for	r SA	ILIN	G AN	ID S	TEA	М	TR	AWI	ER	s.			_		
	ERED U.D. NAGE.	PLATING NUMBER FOR		A2	NCHORS				CHAI	IN (e	e) (f)	(h).			HAW	SERS.	WA	RPS.
Sailing Trawlers.	Steam	IRON AND STEEL STEAM TRAWLERS.	No.	Ist.	2nd.	3rd.	Length	Dia-		M	inimun	n Weis	ght.				-	
Trawlers.	Trawlers.			Cwts.	Cwts.	Cwts.		meter	St	nd L	ink.	She	ort I	ink.	Length.	Size.	Length.	Size
		- 170 -1 0000	0	Stock.	Stock.	ex Stock.	Fathms.	Ins.	Cwts	qrs.	Ibs.	Cwts.	qrs.	lbs.	Fathms.	Ins.	Fathms.	Ins.
50 and 65		2450 and 2800		3	3	13	60	12	17	1	3	18	3	3		5	60	0.1
60 ,, 80		2800 ,, 3250		$3\frac{1}{2}$	$3\frac{1}{2}$	2	60				11					51	60	3
80 ,, 100	100 ,, 120	3250 ,, 3650	3	4	4	21	60	14	23	1	17	25	1	17	60	51	60	3
100 ,, 120	120 ,, 140	3650 ,, 4000	3	41/4	4	$2\frac{1}{2}$	60				17					51	60	31
120 ,, 140	140 ,, 160	4000 ,, 4350	3	$4\frac{1}{2}$	4	$2\frac{1}{2}$					11				200	51	60	31
_	_	4350 ,, 4700			$4\frac{1}{4}$	$2\frac{1}{2}$					13					51	60	4
-		4700 ,, 5000			$4\frac{1}{2}$	$2\frac{1}{2}$	90	1	45	3	17	49	2	0	60	51	60	4
_		5000 ,, 5300			$4\frac{3}{4}$	$2\frac{1}{2}$	90		45	3	17	49	2	0	60	6	60	41
_	-	5300 ,, 5600	3	$5\frac{1}{2}$	5	23	105	$1_{\frac{1}{16}}$	60	2	18	64	3	12	60	6	60	41
-		5600 ,, 5900					105									6	60	5

The Anchors and Chains to be tested at a Public Testing Machine in accordance with the statutory tests.

* The tests of Anchors in this Table are approximate tests; or as near the Statutory tests as can be expressed in tons and aliquot part

Tests for Cast Steel Anchors, see Notice No. 647 at end of the Rules.

Tests for Cast Steel Anchors, see Notice No. 647 at end of the Rules.

(a) By Section 39 of the Rules for the building and classification of Iron and Steel Vessels, it is provided that the equipment is to be regulated by the number produced by the sum of the measurements of the half-moulded breadth of the vessel at the middle of the length, the depth from the upper part of keel to the top of the upper deck beams, with the normal round up, and the girth of the half-midship frame a one, two, and three-decked vessel, and for a spar-decked vessel.

For a vessel, measured from the centre line at top of the keel to the upper deck stringer plate, multiplied by the length of the vessel, one a vessel with a partial awning-deck or a continuous shade deck, the equipment number is to be increased one-eighth beyond what it would be if the vessel were flush-decked.

For a vessel with a partial awning-deck, poop, topgallant forecastle, bridge-house, or a raised quarter-deck, the equipment number is to be increased beyond that for a flush or spar-deck vessel by that proportion of the addition made for a complete awning-deck which the combined Where erections bears to the length of the vessel.

Where erections are fitted upon erections in accordance with plans approved by the Committee, the equipment number is to be correspondingly increased in the same proportion.

To entitle vessels classed A "For Channel Purposes" to the Figure 1, the equipment of Anchors and Chain Cables, etc., should be as should be of the full weight required by the table, and the second bower may be 15 per cent. lighter. This rule, however, applies only to vessels Flushing, the Channel Islands or the Irish Sea service, the equipment must be in accordance with the requirements of Table 22.

(b) In order to meet the requirements of different trades, the weights of Anchors as given in the Table may be modified as under:—

(b) In order to meet the requirements of different trades, the weights of Anchors as given in the Table may be modified as under:—
Where two Bower Anchors only are required, one of them may be 7½ per cent. lighter than the weight set forth in the Table, provided where three Bower Anchors is equal to that given in the Table.

Where three Bower Anchors are required, one of them may be 15 per cent., and another 7½ per cent. lighter than the weight set forth in the Table, provided the collective weight of the three Anchors is equal to that given in Table, but in no case may the best Bower be lighter than prescribed in Table, nor the third Bower be lighter than is allowed by this footnote.

All Anchor Stocks must be of acknowledged and approved description, and be one-fourth the weight of the anchor given in the Table.

The heads of Stockless anchors should not be less than three-fifths of the total weight of the Anchor.

(c) Stockless Stream and Kedge Anchors.—In the case of Stockless Stream and Kedge Anchors, an addition to the weight specified in this Table must be made of one-fourth to compensate for the deficiency in weight consequent on the absence of stock.

(41) All Anchors, including Stream and Kedge Anchors, exceeding 168lbs. in wight, ex. Stock, to be Tested according to the requirements of the Act of Parliament, and the Certificates of Test produced.

(e) The Chain Cables and Stream Chains to be tested in all cases according to the requirements of the Act of Parliament, and the Certificates of Test produced.

(1) There should be included in the weights, 2 End Shackles to each Cable; that iss 4 for each outfit, which contains two Cables,

(2) There should be included in the weights, 2 End Shackles to each Stream Chain.

(h) Unstudded close-link Chains will be admitted as Cables, if proved to two-thirds the Test required for Stud-link Chains for the tensile strain, and 100 per cent. above the tensile strain for the breaking strain.

(i) When steel wire Towlines or Hawsers are adopted, see notes (i) below.

Where a departure from the requirements of this Table is proposed by an Owner the samme should be submitted in the first place for the consideration of the Committee.

N.B.—The Italic letters preceding the Equipment numbers correspond with letters pririnted in the seventh column in the List of Steam

Vessels in the Register Book to indicate the Equipment numbers of vessels per this Table.

(i) STEEL WIRE TOWLINES, HAWSERS AND WARPS.

(i) When steel wire towlines, hawsers, or warps are adopted, a short length of each of the wires compnposing the towline, &c., will be required, after being galvanised, to withstand a tensile stress equivalent to that set forth in Table 22, and the aggregegate strength of the wires must not be less than 10 per cent. in excess of that stress.

Each wire will be required to be capable of being twisted around itself not less than eight times, anand of being untwisted and straightened without breaking.

Each wire will be required to be stage
without breaking.

Each manufacturer to be required to provide on his premises machines suitable for satisfactorily makaking the foregoing tests, and the works
to be at all times open to the inspection of the Society's Surveyors, who are to be empowered to retest any harawser or towline for which a certificate
has been issued by the manufacturer.

Printed Forms of Certificates, approved by the Committee, to be given by the Manufacturers of Sf Steel Wire Hawsers, will be supplied to
them upon application to the Secretary.

SPECIAL FLEXIBLE STEEL WIRE ROPE.

When an Owner prefers to substitute special flexible steel wire ropes for steel wire rope of ordinary make, the sizes may be reduced in accordance with the following table, provided each flexible rope be formed of six strands with 24 wires been in each strand, and that the diameter of each wire is \$\frac{1}{32}\$th of the circumference of the rope, and the ropes are capable of withstanding the breaking teng tests shown in the table:

WIR	BLE STEEL E ROPE. reaking Test.	CORRESPONDING SIZES REQUIRED BY TABLE 22.	WIR	BLE STEEL E ROPE. reaking Test.	CORRESPONDING SIZES REQUIRQUIRED BY TABLE 23LE 22.
Inches. 1 1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	Tons. 8·9 11·7 18·2 18·2 22·0 26·2 30·7 35·5	Inches, 2 2	Inches. 3½ 3½ 4½ 4½ 4½ 5 5½ 6	Tons. 35.5 41.0 52.5 59.0 65.5 73.0 88.0 114.0	Inches, nches, 4 \(\frac{4}{2}\) 4 \(\frac{4}{2}\) 4 \(\frac{1}{2}\) 5 \(\frac{5}{2}\) 5 \(\frac{1}{2}\) 6 \(\frac{7}{2}\)

15th Docember, 1898.

Extract from the Rules, Section 32.

Tonnage for Regulating the Scantlings and Equipment (as regards Anchors, Chains, &c.) of Wood and Composite Vessels.

In flush-decked vessels having either one, two or three decks (not being spar or awning-decked), the tonnage under the upper deck, without abatement of the tonnage of the space for the crew, or for the propelling power of steam vessels, is to regulate all the scantlings of the hull, and also the equipment of the vessel, as regards anchors, chains, warps, &c.

† In vessels having a raised quarter deck, or a poop, or top-gallant forecastle, or deck houses, or awning-deck, or spar deck, the total tonnage below the tonnage deck is to regulate the scantlings of the hull, but the register tonnage, as cut on the main beam of sailing vessels and of steam vessels, with the addition of the tonnage of the space required for propelling power, is to regulate the equipment.

But in vessels where the tonnage of the erections above the tonnage deck is less than that allowed for crew space, then the difference between the tonnage of these erections and the tonnage of the space allowed for crew is to be added to the register tonnage, cut on the main beam, for the tonnage that is to regulate the equipment.

No. 304.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

CHAIN CABLES.

Testing to Breaking Strain.

"Chains tested under the Chain Cable and Anchor Act of 1864, at a Machine recognised by the Committee, will be accepted for any Vessel built, commenced, or contracted for prior to the 1st July, 1871; and all Vessels built, commenced, or contracted for after the 30th June, 1872, will be required to be supplied with Chains tested in conformity with the requirements of the New Act."

By order of the Committee, BERNARD WAYMOUTH,

Secretary.

2, White Lion Court, Cornhill, London, E.C. 1st January, 1873.

PROVING ESTABLISHMENTS.

The following Proving Establishments are recognised by the Committee of Lloyd's Register for the Testing of Anchors and Chains while licensed by the Board of Trade for that purpose-

Netherton—Lloyd's Proving HouseSup	perintenden	it, Mr. H. Green.
Assistant	ditto	Mr. T. H. Dudley.
Tipton—Lloyd's Proving House	ditto	Mr. C. E. Perrins.
Assistant	ditto	Mr. S. C. Paul.
Low Walker—Lloyd's Proving House	ditto	Mr. W. J. Relf.
Chester (Saltney)—Lloyd's Proving House	ditto	Mr. A. S. Jack.
Assistant	ditto	Mr. J. Littler.
Glasgow—Lloyd's Proving House	ditto	Mr. E. Seedhouse.
Cardiff—Lloyd's Proving House	ditto	Mr. G. W. Penn.
Sunderland—Lloyd's Proving House	ditto	Mr. H. T. Welford.

N.B. - Vessels supplied with Anchors and Chain Cables tested at any of the Proving Establishments in the above list, will have the notation of "Lloyd's A. & C.P." in the Register Book, signifying that the Anchors and Chain Cables have been tested at a machine under the control of the Committee of Lloyd's Register of Shipping.

The following Machines have been recognised by the Committee for the testing of Anchors and Chain Cables supplied to foreign owned vessels (see Section 39 of the Rules).

Société Anonyme des Fabriques de Chaines & Piéces de Forge de Belgium Heppignies, near Fleurus. DENMARK Government Establishment at Copenhagen. FRANCE..... E. Turbot, Anzin (Nord). Chantiers de la Loire, Nantes, Vve. E. Couillard, Sucer, Havre. Dorémieux, Fils et Cie., St. Amand. E. Davaine, St. Amand les Eaux (Nord).

...... Marrel Frères, Capelette, Marseilles. near St. Étienne (Usine de la Massardière).

GERMANY Hochfelder Walzwerk, Duisberg. HOLLAND Koninklijke Nederlandsche Grofsmederij at Leyden. SWEDEN...... Government Establishment at Kongl. Tekniska Högskolan, Stockholm, UNITED STATES American Steel Casting Co., Chester, Pennsylvania (for the testing of

Anchors only). " Messrs. Bradlee & Co.'s Works at Philadelphia.

,, ,, Messrs. J. B. Carr & Co., Troy, N.Y. " Lebanon Chain Works, Lebanon, Pennsylvania.

" The Logan Iron and Steel Co. of Burnham, Pennsylvania.

" The Baldt Anchor Co., Chester, Pa. (for the testing of Anchors only). ,, The Seaboard Steel Castings Co., Chester, Pennsylvania (for the testing of Anchors only).

" West End Rolling Mills, Lebanon, Philadelphia.

Tabl 1 to

			THE REPORT OF THE PARTY OF THE	100	010 01 11111111	ann binnendiene	THANLO
1	NUMBERS.	SPACING	FRA	MES.	Reversed Frames,	Dimensions	Dimensions o
	For Frames, Reversed Frames, Bulk- heads, & Pillars. (See Section 2.)	OF FRAMES.	Dimensions of angles for three- fifths the length of vessel amidships, and bulkheads.	Dimensions of angles before and abaft the three-fifths length.	Dimensions of Reversed angles all fore and aft.	of and Channel bar Frames for three-fifths length amidships.	Bulb Angle Frames for three-fifths len amidships.
	31 and 37	ins. 20	$2\frac{1}{2} \times 2\frac{1}{2} \times \frac{5}{20}$	$2\frac{1}{2} \times 2\frac{1}{2} \times \frac{5}{20}$	$2\frac{1}{4} \times 2\frac{1}{4} \times \frac{5}{20}$	inches.	inches.
	37 and 45	21	$3 \times 2\frac{1}{2} \times \frac{5}{20}$	$3 \times 2\frac{1}{2} \times \frac{5}{20}$	$2\frac{1}{2} \times 2\frac{1}{2} \times \frac{5}{20}$		
	45 and 52	21	$3 \times 3 \times \frac{6}{20}$	$3 \times 3 \times \frac{5}{20}$	$2\frac{1}{2} \times 2\frac{1}{2} \times \frac{5}{20}$		
	52 and 57	22	$3\frac{1}{2} \times 3 \times \frac{6}{20}$	$3\frac{1}{2} \times 3 \times \frac{5}{20}$	$3 \times 2\frac{1}{2} \times \frac{5}{20}$	$3\frac{1}{2} \times 3 \times 3 \times \frac{7}{20}$	$4\frac{1}{2} \times 3 \times 3$
-	57 and 61	22	$3\frac{1}{2} \times 3 \times \frac{7}{20}$	$3\frac{1}{2} \times 3 \times \frac{6}{20}$	$3 \times 2\frac{1}{2} \times \frac{6}{20}$	$3\frac{1}{2} \times 3 \times 3 \times \frac{8}{20}$	$4\frac{1}{2} \times 3 \times$
	61 and 65	23	$4 \times 3 \times \frac{7}{20}$	$4 \times 3 \times \frac{6}{20}$	$3 \times 3 \times \frac{6}{20}$	$4 \times 3 \times 3 \times \frac{8}{20}$	5 ×3 ×
	65 and 68	23	$4 \times 3 \times \frac{7}{20}$	$4 \times 3 \times \frac{6}{20}$	$3 \times 3 \times \frac{7}{20}$	$4 \times 3 \times 3 \times \frac{8}{20}$	5 ×3 ×
-	68 and 71	23	$4\frac{1}{2} \times 3 \times \frac{7}{20}$	$4\frac{1}{2} \times 3 \times \frac{6}{20}$	$3 \times 3 \times \frac{7}{20}$	$4\frac{1}{2} \times 3 \times 3 \times \frac{8}{20}$	$5\frac{1}{2} \times 3 \times 3$
	71 and 73	24	$4\frac{1}{2} \times 3 \times \frac{8}{20}$	$4\frac{1}{2} \times 3 \times \frac{7}{20}$	$3 \times 3 \times \frac{7}{20}$	$4\frac{1}{2} \times 3 \times 3 \times \frac{9}{20}$	$5\frac{1}{2} \times 3 \times 3$
	73 and 76	24	$5 \times 3 \times \frac{8}{20}$	$5 \times 3 \times \frac{7}{20}$	$3 \times 3 \times \frac{7}{20}$	$5 \times 3 \times 3 \times \frac{9}{20}$	6 ×3 ×
-	76 and 80	24	$5 \times 3 \times \frac{8}{20}$	$5 \times 3 \times \frac{7}{20}$	$3\frac{1}{2} \times 3 \times \frac{8}{20}$	$5 \times 3 \times 3 \times \frac{10}{20}$	6 ×3 ×
Contract contract actions	80 and 85	24	$5 \times 3\frac{1}{2} \times \frac{8}{20}$	$5 \times 3\frac{1}{2} \times \frac{7}{20}$	$3\frac{1}{2} \times 3\frac{1}{2} \times \frac{8}{20}$	$5 \times 3\frac{1}{2} \times 3\frac{1}{2} \times \frac{10}{20}$	$6 \times 3\frac{1}{2} \times \frac{1}{2}$
The second designation of the	85 and 91	24	$5\frac{1}{2} \times 3\frac{1}{2} \times \frac{8}{20}$	$5\frac{1}{2} \times 3\frac{1}{2} \times \frac{7}{20}$	$4 \times 3\frac{1}{2} \times \frac{8}{20}$	$5\frac{1}{2} \times 3\frac{1}{2} \times 3\frac{1}{2} \times \frac{10}{20}$	$6\frac{1}{2} \times 3\frac{1}{2} \times 3$
scienti cir in teraca	91 and 97	24	$5\frac{1}{2} \times 3\frac{1}{2} \times \frac{9}{20}$	$5\frac{1}{2} \times 3\frac{1}{2} \times \frac{8}{20}$	$4 \times 3\frac{1}{2} \times \frac{9}{20}$	$5\frac{1}{2} \times 3\frac{1}{2} \times 3\frac{1}{2} \times \frac{11}{20}$	$6\frac{1}{2} \times 3\frac{1}{2} \times \frac{1}{2}$
-	97 and 103	25	$6 \times 3\frac{1}{2} \times \frac{10}{20}$	$6 \times 3\frac{1}{2} \times \frac{9}{20}$	$4\frac{1}{2} \times 3\frac{1}{2} \times \frac{9}{20}$	$6 \times 3\frac{1}{2} \times 3\frac{1}{2} \times \frac{12}{20}$	7. $\times 3\frac{1}{2} \times \frac{1}{2}$
-	103 _{under} 109	25	$6 \times 3\frac{1}{2} \times \frac{10}{20}$	$6 \times 3\frac{1}{2} \times \frac{9}{20}$	$4\frac{1}{2} \times 3\frac{1}{2} \times \frac{10}{20}$	$6\frac{1}{2} \times 3\frac{1}{2} \times 3\frac{1}{2} \times \frac{12}{20}$	$7\frac{1}{2} \times 3\frac{1}{2} \times \frac{1}{2}$
-	109 and 115	26	$6\frac{1}{2} \times 3\frac{1}{2} \times \frac{10}{20}$	$6\frac{1}{2} \times 3\frac{1}{2} \times \frac{9}{20}$	$4\frac{1}{2} \times 4 \times \frac{10}{20}$	$7 \times 3\frac{1}{2} \times 3\frac{1}{2} \times \frac{12}{20}$	$8 \times 3\frac{1}{2} \times \frac{1}{2}$
onemales oreton	115 and 122	26	$7 \times 3\frac{1}{2} \times \frac{10}{20}$	$6\frac{1}{2} \times 3\frac{1}{2} \times \frac{9}{20}$	$4\frac{1}{2} \times 4 \times \frac{10}{20}$	$7\frac{1}{2} \times 3\frac{1}{2} \times 3\frac{1}{2} \times \frac{12}{20}$	$8\frac{1}{2} \times 3\frac{1}{2} \times \frac{1}{2}$
The same of	122 and 130	27	$7 \times 3\frac{1}{2} \times \frac{1}{20}$	$6\frac{1}{2} \times 3\frac{1}{2} \times \frac{10}{20}$	$4\frac{1}{2} \times 4 \times \frac{10}{20}$	$7\frac{1}{2} \times 3\frac{1}{2} \times 3\frac{1}{2} \times \frac{13}{20}$	$8\frac{1}{2} \times 3\frac{1}{2} \times \frac{1}{2}$

MEMO.: - Wider spacing than the above may be adopted provided t

The thickness given for Channel or 7 Sections is *When deep framing is adopted in vessels over $32\frac{1}{2}$ feet from top of keel to top LLOYD'S REGISTER OF SHIPPING, 2, WHITE LION COURT, CORNHILL, LONDON, E.C.

EVER	TOLD	FRAMES, FLO	JOIL	ILAI	20, 50	LNI	LADS,	αc.				17	DLI	- '		miliu e
		FRAMING ction 14b.)*	Bulk	heads.				OR		ZES			LO			
Depth	Width	Angles on	Lower	Upper		in the	engine sp	ace of $\frac{2}{20}$	of an ir	ich thi	cker t	han i	n this	Tab	le.	, and
of raming.	of Stringers.	Stringers.	Half.	Half.	FOR FLOO (See Section	RS.	For three length ami		Thick- ness at Ends.	FLO	BERS ORS—C	cont.	For	three a mi	-fifths dships.	Thick- ness at Ends.
ins.	ins.	inches.	inches.	inches.	Of and	20	inche		inches.	0.7				nches		inches.
			$\frac{5}{20}$	$\frac{5}{2.0}$	31 and under		9 ×	$\frac{5}{20}$	$\frac{5}{20}$	1	and	68	20	$\frac{1}{2}$ \times	$\frac{8}{20}$	$\frac{7}{20}$
			$\frac{5}{20}$	$\frac{5}{20}$	32 and under		$\frac{9\frac{1}{2}\times}{10}$	5 20	$\frac{5}{20}$	68	and	69	21		<u>8</u> <u>20</u>	$\frac{7}{20}$
			5	- 5	33 and under	-	10 ×	$\frac{5}{20}$	$\frac{5}{20}$	-	and	70	21	×	$\frac{9}{20}$	20
	•••	•••	$\frac{5}{20}$	20	34 and under	35	$10\frac{1}{2} \times$	$\frac{5}{20}$	$\frac{5}{20}$	70	and	71	21	1 ×	$\frac{9}{20}$	$\frac{7}{20}$
$5\frac{1}{2}$	14	$4 \times 3\frac{1}{2} \times \frac{7}{20}$	$\frac{6}{20}$	$\frac{5}{20}$	35 and under	-	11 ×	$\frac{5}{20}$	$\frac{5}{20}$	71	and under	72	22	×	$\frac{9}{20}$	$\frac{7}{20}$
$5\frac{1}{2}$	15	$4\frac{1}{2} \times 3\frac{1}{2} \times \frac{7}{20}$	$\frac{6}{20}$	$\frac{5}{20}$	37 and under	39	$11\frac{1}{2} \times$	$\frac{5}{20}$	$\frac{5}{20}$	72	and	73	22	X	$\frac{9}{20}$	20
02	10	$\frac{4}{2}$ \wedge $\frac{3}{2}$ \wedge $\frac{1}{20}$	20	20	39 and under	41	12 ×	$\frac{5}{20}$	$\frac{5}{20}$	73	and under	74	23	×	$\frac{9}{20}$	7 20
6	16	$4\frac{1}{2} \times 4 \times \frac{7}{20}$	$\frac{6}{20}$	$\frac{6}{20}$	41 and under	-	12 ×	$\frac{6}{20}$	$\frac{5}{20}$	74	and under	76	23	X	$\frac{9}{20}$	$\frac{7}{20}$
$6\frac{1}{2}$	17	$4\frac{1}{2} \times 4 \times \frac{8}{20}$	6_ 20	$\frac{6}{20}$	43 and under	45	$12\frac{1}{2} \times$	$\frac{6}{20}$	$\frac{5}{20}$	76	and under	78	24	X	$\frac{9}{20}$	$\frac{7}{20}$
					45 and under	47	13 ×	$\frac{6}{20}$	$\frac{5}{20}$	78	and	80	24	X	10 20	$\frac{8}{20}$
7	18	$5 \times 4 \times \frac{9}{20}$	$\frac{6}{20}$	$\frac{6}{20}$	47 and under	49	$13\frac{1}{2} \times$	$\frac{6}{20}$	$\frac{5}{20}$	80	and under	84	24	X	1020	$\frac{8}{20}$
7	20	$5\frac{1}{2} \times 4 \times \frac{9}{20}$	$\frac{6}{20}$	$\frac{6}{20}$	49 and under	51	14 ×	$\frac{6}{20}$	$\frac{5}{20}$	84	and under	88	25	X	$\frac{10}{20}$	$\frac{8}{20}$
$7\frac{1}{2}$	20	$5\frac{1}{2}\times4$ $\times\frac{9}{20}$	$\frac{6}{20}$	$\frac{6}{20}$	51 and under	52	$14\frac{1}{2} \times$	$\frac{6}{20}$	$\frac{5}{20}$	88	and under	90	26	X	$\frac{1}{2}\frac{0}{0}$	$\frac{8}{20}$
			20		52 and under	53	15 ×	$\frac{6}{20}$	$\frac{5}{20}$	90	and under	92	27	×	$\frac{10}{20}$	$\frac{8}{20}$
$7\frac{1}{2}$	21	$6 \times 4 \times \frac{9}{20}$	$\frac{7}{20}$	$\frac{6}{20}$	53 and under	55	$15\frac{1}{2} \times$	$\frac{6}{20}$	$\frac{5}{20}$	92	and under	95	28	×	$\frac{10}{20}$	$\frac{8}{20}$
8	21	$6\frac{1}{2} \times 4 \times \frac{9}{20}$	$\frac{7}{20}$	$\frac{6}{20}$	55 and under	56	$15\frac{1}{2} \times$	$\frac{7}{20}$	$\frac{6}{20}$	95	and	98	29	X	$\frac{10}{20}$	$\frac{8}{20}$
81	. 22	$6\frac{1}{2} \times 4\frac{1}{2} \times \frac{9}{20}$	7	6	56 and under	57	16 ×	$\frac{7}{20}$	$\frac{6}{20}$	98,	and ander	101	30	×	1020	8 20
2		$0_{\overline{2}} \wedge \overline{1_{\overline{2}}} \wedge \overline{20}$	$\frac{7}{20}$	$\frac{6}{20}$	57 and under	58	$16\frac{1}{2} \times$	$\frac{7}{20}$	$\frac{6}{20}$	101	and ander	105	31	×	$\frac{1}{2}\frac{0}{0}$	$\frac{8}{20}$
9	23	$6\frac{1}{2} \times 4\frac{1}{2} \times \frac{10}{20}$	$\frac{7}{20}$	$\frac{6}{20}$	58 and under	59	17 ×	$\frac{7}{20}$	$\frac{6}{20}$	105	and and	108	32	×	1020	$\frac{8}{20}$
$9\frac{1}{2}$	24	$6\frac{1}{2} \times 4\frac{1}{2} \times \frac{10}{20}$	8 2 0	7 20	59 and under		$17\frac{1}{2} \times$	$\frac{7}{20}$	$\frac{6}{20}$	108	and ander -	110	33	×	$\frac{1}{2}\frac{0}{0}$	8 2 0 mm
				- Total Marco	60 and under	62	$17\frac{1}{2} \times$	$\frac{8}{20}$	$\frac{7}{20}$	110,	and ander -	113	34	×	$\frac{10}{20}$	8 20
	•••	• • •	8 2 0	20	62 and under	63	18 ×	$\frac{8}{20}$	$\frac{7}{20}$	113	and -	116	35	×	$\frac{1}{2}\frac{0}{0}$	8 20
		• • •	$\frac{8}{20}$	$\frac{7}{20}$	63 and under		$18\frac{1}{2} \times$			116,			36	X	$\frac{1}{2}\frac{0}{0}$	8 20
		0 0 0	8 2 0	7 2 0	64 and under	65	19 ×	$\frac{8}{20}$	$\frac{7}{20}$	120 ,	and Inder	125	37	X	$\frac{10}{20}$	8 20
			20	20	65 and under	66	$19\frac{1}{2} \times$	$\frac{8}{20}$	$\frac{7}{20}$	125 r	and Inder]	130	38	X	$\frac{10}{20}$	8 20
		0 0 0	8 2 0	$\frac{7}{20}$	66 and under	67	20 ×	$\frac{8}{20}$	$\frac{7}{20}$							- I V Tall METC THE 4.0

raming and plating be increased in size to the satisfaction of the Committee.

the minimum thickness of both webs and flanges.

upper deck beams, plans are to be specially submitted for the consideration of the Committee.



STEEL VESSELS.

TABLE OF MINIMUM DIAMETERS OF SOLID

				PIL	LARS I	O UPPI	ER OR	SPAR I	DECK B	EAMS.					PILLA	RS T	O MII	DDLE
LENGTH			One	row of F	illars.			Two	rows of	Pillars.	Three	rows of	Pillars.		One ro	ow of	Pillars	
OF PILLAR.				LE	NGTHS	OF BE	AMS A	MIDSHIP	S IN F	EET.					LENG'	THS (OF BI	EAMS
	15	19	23	27	31	35	39	43	47	51	55	59	63	23	27	31	35	39
Feet. 6 and 8	$\overset{\text{ins.}}{2\frac{1}{4}}$	$\begin{array}{c} \text{ins.} \\ 2\frac{1}{4} \end{array}$	$\frac{\text{ins.}}{2\frac{3}{8}}$	ins. $2\frac{3}{8}$	$\frac{1}{2}$ ins.	$\frac{1}{2\frac{5}{8}}$	$\begin{array}{c} \text{ins.} \\ 2\frac{3}{4} \end{array}$	$\frac{1}{2\frac{5}{8}}$	$\begin{array}{c} \text{ins.} \\ 2\frac{3}{4} \end{array}$	$\begin{array}{c} \text{ins.} \\ 2\frac{7}{8} \end{array}$	$2\frac{3}{4}$	$\frac{1}{2\frac{7}{8}}$	ins.	$2\frac{7}{8}$	ins.	ins. $3\frac{1}{8}$	ins. $3\frac{1}{4}$	ins, $3\frac{3}{8}$
8 and 10	$2\frac{3}{8}$	$2\frac{3}{8}$	$2\frac{1}{2}$	$2\frac{1}{2}$	$2\frac{5}{8}$	$2\frac{3}{4}$	$2\frac{\dot{7}}{8}$	$2\frac{3}{4}$	$2\frac{7}{8}$	3	$2\frac{7}{8}$	3	$3\frac{1}{8}$	3	$3\frac{1}{8}$	$3\frac{1}{4}$	$3\frac{1}{2}$	$\frac{35}{8}$
10 and 12	$2\frac{1}{2}$	$2\frac{1}{2}$	$2\frac{5}{8}$	$2\frac{3}{4}$	$2\frac{3}{4}$	$2\frac{7}{8}$	3	$2\frac{7}{8}$	3	$3\frac{1}{8}$				$3\frac{1}{4}$	$3\frac{3}{8}$	$3\frac{1}{2}$	$3\frac{3}{4}$	$3\frac{7}{8}$
12 and 14	$2\frac{5}{8}$	$2\frac{3}{4}$	$2\frac{7}{8}$	3	3	$3\frac{1}{8}$	$3\frac{1}{4}$	3	$3\frac{1}{8}$	$3\frac{1}{4}$					$3\frac{5}{8}$	$3\frac{3}{4}$	4	41/4
14 and 16		$2\frac{7}{8}$	3	$3\frac{1}{8}$	$3\frac{1}{4}$	$3\frac{3}{8}$	$3\frac{1}{2}$	$3\frac{1}{4}$	$3\frac{3}{8}$	$3\frac{1}{2}$						4	$4\frac{1}{4}$	$4\frac{1}{2}$
16 and 18			$3\frac{1}{4}$	$3\frac{3}{8}$	$3\frac{1}{2}$	$3\frac{5}{8}$	$3\frac{3}{4}$	$3\frac{1}{2}$	$3\frac{5}{8}$	$3\frac{3}{4}$						$4\frac{1}{4}$	$\frac{41}{2}$	$\frac{4\frac{3}{4}}{}$
18 and 20			$3\frac{1}{2}$	$3\frac{5}{8}$	$3\frac{3}{4}$	$3\frac{7}{8}$	4	$3\frac{3}{4}$	$3\frac{7}{8}$	4							$4\frac{3}{4}$	5
20 and 22			~	$3\frac{3}{4}$	37/8	4	41/4	$3\frac{7}{8}$	4	$4\frac{1}{4}$							5	$5\frac{1}{4}$
22 and 24				4	4	41/4	$4\frac{1}{2}$	4	41/4	$4\frac{1}{2}$								$\left 5\frac{1}{2} \right $
$24_{ m under}^{ m and}26$					41/4	$\frac{41}{2}$	$4\frac{3}{4}$	$4\frac{1}{4}$	$4\frac{1}{2}$	$4\frac{3}{4}$								
$26_{\mathrm{under}}^{\mathrm{and}}28$						$\frac{4_{3}}{4}$	5	$4\frac{1}{2}$	$\frac{4_{\frac{3}{4}}}{}$	5								
28 and 30							$5\frac{1}{4}$	$\frac{4_{3}}{4}$	5	$5\frac{1}{4}$								
30 and 32								5	$5\frac{1}{4}$	$5\frac{1}{2}$								
		PIL	LARS I	CO AWI	NING, B	RIDGE,	FOREC	ASTLE,	AND P	OOP DE	ECK BEA	AMS.						
6 and 8	$2\frac{1}{8}$	$2\frac{1}{8}$	$2\frac{1}{4}$	$2\frac{1}{4}$	$2\frac{3}{8}$	$2\frac{1}{2}$	$2\frac{5}{8}$	$2\frac{1}{2}$	$2\frac{5}{8}$	$2\frac{3}{4}$	$2\frac{5}{8}$	$2\frac{3}{4}$	$2\frac{7}{8}$					

LLOYD'S REGISTER OF SHIPPING, 2, WHITE LION COURT, CORNHILL, LONDON, E.C.—26th April, 1900.

OR M	IAIN D	ECK BI	EAMS.			of Pillars Two rows of Pillars. Three rows of Pillars. Three rows of Pillars.								DECK				
Two r	ows of]	Pillars.	TI	ree ro	ows rs.	One of Pi	row llars.	Two r	rows of	Pillars.	Three	rows of	Pillars.	Two rows of Pillars.		rows of	Pillars.	LENGTH
AMID	SHIPS	IN FEE	T.				LENG	THS O	F BEAN	IS AMII	DSHIPS	IN FEE	ET.	LE AN	NGTHS IIDSHIP	OF BE	AMS EET.	OF PILLAR.
43	47	51	55	59	63	35	39	43	47	51	55	59	63	51	55	59	63	
ins. $3\frac{1}{8}$	$3\frac{1}{4}$	ins. $3\frac{3}{8}$	$3\frac{1}{4}$	ins. $3\frac{3}{8}$	$3\frac{1}{2}$	$3\frac{3}{4}$	ins. $3\frac{7}{8}$	$\frac{\text{ins.}}{3\frac{5}{8}}$	ins. $3\frac{3}{4}$	$\frac{\text{ins.}}{3\frac{7}{8}}$	ins. $3\frac{3}{4}$	ins. $3\frac{7}{8}$	ins.	ins. $4\frac{1}{4}$	ins.	ins. $4\frac{1}{4}$	ins. $4\frac{1}{4}$	Feet. 6 and 8
$3\frac{3}{8}$	$3\frac{1}{2}$	$3\frac{5}{8}$	$3\frac{1}{2}$	35/8	$3\frac{3}{4}$	4	4	$\frac{3_{\frac{3}{4}}}{3_{\frac{1}{4}}}$	4	4	$\frac{37}{8}$	4	$\frac{1}{4}$	$4\frac{1}{2}$	$\frac{4_{1}}{4}$	$4\frac{1}{4}$	$4\frac{1}{2}$	8 and 10
35/8	$3\frac{3}{4}$	$3\frac{7}{8}$	$3\frac{3}{4}$			$4\frac{1}{4}$	41/4	4	$4\frac{1}{4}$	$4\frac{1}{4}$	4	$4\frac{1}{4}$	$\frac{41}{2}$	$4\frac{3}{4}$	$\frac{41}{2}$	$4\frac{1}{2}$	$4\frac{3}{4}$	$10_{ m under}^{ m and} 12$
$3\frac{7}{8}$	4	$4\frac{1}{4}$	4				$\frac{41}{2}$	$\frac{41}{4}$	$4\frac{1}{2}$	$4\frac{1}{2}$	$\frac{41}{4}$	$4\frac{1}{2}$	$\frac{4_{3}}{4}$	5	$\frac{43}{4}$	$4\frac{3}{4}$	5	$12_{ m under}^{ m and} 14$
4	$4\frac{1}{4}$	$\frac{41}{2}$	$4\frac{1}{4}$					$4\frac{1}{2}$	$4\frac{3}{4}$	$4\frac{3}{4}$	$\frac{4\frac{1}{2}}{}$	$4\frac{3}{4}$	5	$5\frac{1}{4}$	5	$5\frac{1}{4}$	$5\frac{1}{4}$	$14_{ m under}^{ m and}16$
41/4	$\frac{41}{2}$	$\frac{4^{3}}{4}$	$4\frac{1}{4}$					$4\frac{3}{4}$	$4\frac{3}{4}$	5	$\frac{4^{3}}{4}$	5	$5\frac{1}{4}$	$5\frac{1}{2}$	$5\frac{1}{4}$	$5\frac{1}{2}$	$5\frac{1}{2}$	16 and 18
$4\frac{1}{2}$	$\frac{4^{3}}{4}$.	$4\frac{3}{4}$	$4\frac{1}{2}$						5	$5\frac{1}{4}$	$5\frac{1}{4}$	$5\frac{1}{4}$	$5\frac{1}{2}$		$5\frac{1}{2}$	$5\frac{3}{4}$	$5\frac{3}{4}$	18 and 20
434	5	5	$\frac{4^{3}}{4}$						$5\frac{1}{4}$	$5\frac{1}{2}$	$5\frac{1}{2}$	$5\frac{1}{2}$	$5\frac{3}{4}$			6	6	20 and 22
5	51/4	$5\frac{1}{4}$	5							$5\frac{3}{4}$	$5\frac{3}{4}$	$5\frac{3}{4}$	6					22 and 24 under 24
$5\frac{1}{4}$	$5\frac{1}{2}$	$5\frac{1}{2}$	$5\frac{1}{4}$			Commence of the commence of th				6	6	6	$6\frac{1}{4}$					24 and 26
$5\frac{1}{2}$	$5\frac{3}{4}$	$5\frac{3}{4}$	$5\frac{1}{2}$			TO THE CONTRACT OF THE CONTRAC					$6\frac{1}{4}$	61/4	$6\frac{1}{2}$					26 and 28
$5\frac{3}{4}$	6	6	$5\frac{3}{4}$			CHEVITA CHARACTURA AND AND AND AND AND AND AND AND AND AN												28 _{under} 30
						AND SACTOR CONTINUES OF STREET								CONTRACTOR				$30_{\mathrm{under}}^{\mathrm{and}}32$

Pillars under wide spaced hold beams may be of the sizes required for pillars of the same length under the deck next above the hold beams.

If a middle deck is intended exclusively for the accommodation of passengers, the pillars between this deck and the floors may be a quarter of an inch less in diameter than is required by the Table, and where the lower deck is also intended for passengers exclusively, the pillars between this deck and the floors may be half an inch less in diameter than required by the Table.

For sizes of Hollow pillars see Table S 1B.

)LE	OR MAIN	DECK			PILLA	RS TO ORLO	OP DECK B	EAMS.	
	Two	rows of	rows of Pi	llars.	Two rows of Pillars.	Three	e rows of Pi	llars.	LENGTH
MS	AMIDSHIP	S IN I			LENGTHS	OF BEAMS	AMIDSHIPS	S IN FEET.	OF PILLAR.
)	43	47	59	63	51	55	59	63	
7 16	$\frac{1}{4\frac{1}{4} \times \frac{7}{16}}$	$4\frac{1}{2} \times$	ins. $\times \frac{8}{16}$	$6 \times \frac{9}{16}$	$6\frac{1}{4} \times \frac{9}{16}$	$6 \times \frac{9}{16}$	$6\frac{1}{4} \times \frac{9}{16}$	$6\frac{1}{4} \times \frac{9}{16}$	Feet. 6 and under 8
7 1 6	$4\frac{3}{4} \times \frac{7}{16}$	5 ×	$\times \frac{9}{16}$	$6\frac{1}{4} \times \frac{9}{16}$	$6\frac{1}{2} \times \frac{9}{16}$	$6\frac{1}{4} \times \frac{9}{16}$	$6\frac{1}{4} \times \frac{9}{16}$	$6\frac{1}{2} \times \frac{9}{16}$	8 and under 10
7 1 6	$5 \times \frac{7}{16}$	$5\frac{1}{2} \times -$	$\times \frac{9}{16}$	$6\frac{1}{4} \times \frac{9}{16}$	$6\frac{1}{2} \times \frac{9}{16}$	$6\frac{1}{4} \times \frac{9}{16}$	$6\frac{1}{4} \times \frac{9}{16}$	$6\frac{1}{2} \times \frac{9}{16}$	10 and 12
9 16	$5\frac{1}{2} \times \frac{7}{16}$	6 ×	$\frac{1}{4} \times \frac{9}{16}$	$6\frac{1}{2} \times \frac{9}{16}$	$7 \times \frac{9}{16}$	$6\frac{1}{2} \times \frac{9}{16}$	$6\frac{1}{2} \times \frac{9}{16}$	$7 \times \frac{9}{16}$	$12_{\mathrm{under}}^{\mathrm{and}}14$
9 1 6	$5\frac{1}{2} \times \frac{8}{16}$	6 ×	$\frac{1}{4} \times \frac{9}{16}$	$6\frac{3}{4} \times \frac{9}{16}$	$7 \times \frac{9}{1.6}$	$6\frac{3}{4} \times \frac{9}{16}$	$7 \times \frac{9}{16}$	$7 \times \frac{9}{1.6}$	14 _{under} 16
9 1 6	$6 \times \frac{8}{16}$	6 ×	$\frac{3}{4} \times \frac{9}{16}$	$7 \times \frac{9}{16}$	$7\frac{1}{4} \times \frac{10}{16}$	$7 \times \frac{9}{1.6}$	$7\frac{1}{4} \times \frac{10}{16}$	$7\frac{1}{4} \times \frac{10}{16}$	16 and 18
9 16	$6 \times \frac{8}{16}$	6 ×	$\frac{3}{4} \times \frac{9}{16}$	$7 \times \frac{9}{16}$		$7 \times \frac{9}{1.6}$	$7\frac{1}{2} \times \frac{10}{16}$	$7\frac{1}{2} \times \frac{10}{16}$	18 and 20
9 16	$6 \times \frac{9}{1.6}$	$6\frac{1}{4} \times -$	$\times \frac{9}{16}$	$7\frac{1}{2} \times \frac{10}{16}$			8 × 11/16	$8 \times \frac{11}{16}$	$20_{\mathrm{under}}^{\mathrm{and}}22$
9 16	$6\frac{1}{4} \times \frac{9}{16}$	63 ×	$\frac{1}{2} \times \frac{10}{16}$	$8 \times \frac{11}{16}$	The second secon				22 and 24 under 24
	$6\frac{1}{4} \times \frac{9}{16}$	$6\frac{3}{4} \times 10^{-3}$	$\times \frac{10}{16}$	$8 \times \frac{11}{16}$					24 _{under} 26
	$6\frac{3}{4} \times \frac{9}{16}$	$7\frac{1}{4} \times$	X 11/6	$8\frac{1}{2} \times \frac{11}{16}$					26 and 28
	$7\frac{1}{4} \times \frac{10}{16}$	8 ×							28 and 30
									$30_{\mathrm{under}}^{\mathrm{and}}32$

h under the deck next

reen this deck and the the lower deck is also inch less in diameter

PILL

OR M

AMIDS

 $4\frac{1}{4} \times 1$

 $4\frac{3}{4} \times 1$

5 × 1

 $5\frac{1}{2} \times \frac{1}{1}$

 $5\frac{1}{2} \times \frac{1}{1}$

 $6 \times \frac{1}{1}$

 $6 \times \frac{8}{1}$

 6×1^{9}

 $6\frac{1}{4} \times \frac{9}{1}$

 $6\frac{1}{4} \times \frac{9}{1}$

 $6\frac{3}{4} \times \frac{9}{10}$

 $7\frac{1}{4} \times \frac{10}{10}$

					PILLARS	S TO UPPE	ER OR SP	PAR DECK	BEAMS.							P	PILLARS T	O MIDDL
LENGTH			One	row of Pil	lars.			Two	rows of Pi	llars.	Three	e rows of P	illars.		On	e row of Pil	llars.	
OF PILLAR.					LENGT	HS OF BE	CAMS AMI	DSHIPS IN	FEET.								LENGTH	OF BEAM
	15	19	23	27	31	35	39	43	47	51	55	59	63	23	27	31	35	39
$\begin{array}{c} {\rm Feet.} \\ 6_{\rm under}^{\rm \ and} \ 8 \end{array}$	$2\frac{3}{4} \times \frac{5}{16}$	$2\frac{3}{4} \times \frac{5}{16}$	$3 \times \frac{5}{16}$	$3 \times \frac{5}{16}$	$3 \times \frac{6}{16}$	$3\frac{1}{4} \times \frac{6}{16}$	$3\frac{1}{2} \times \frac{6}{16}$	$3\frac{1}{4} \times \frac{6}{16}$	$3\frac{1}{2} \times \frac{6}{16}$	$3\frac{3}{4} \times \frac{6}{16}$	$3\frac{1}{2} \times \frac{6}{16}$	$3\frac{3}{4} \times \frac{6}{16}$	$\overset{\text{ins.}}{4} \times \overset{7}{\overset{1}{_{6}}}$	$3\frac{3}{4} \times \frac{6}{16}$	$\overset{\text{ins.}}{4} \times \frac{7}{16}$	$4\frac{1}{4} \times \frac{7}{16}$	$11 \times \frac{7}{16}$	ins. $4\frac{3}{4} \times \frac{7}{1}$
8 and 10	$3 \times \frac{5}{16}$	$3 \times \frac{5}{16}$	$3 \times \frac{6}{16}$	$3 \times \frac{6}{16}$	$3\frac{1}{4} \times \frac{6}{16}$	$3\frac{1}{2} \times \frac{6}{16}$	$3\frac{3}{4} \times \frac{6}{16}$	$3\frac{1}{2} \times \frac{6}{16}$	$3\frac{3}{4} \times \frac{6}{16}$	$4 \times \frac{7}{16}$	$3\frac{3}{4} \times \frac{6}{16}$	$4 \times \frac{7}{16}$	$\frac{1}{4\frac{1}{4} \times \frac{7}{16}}$	$4 \times \frac{7}{16}$	$4\frac{1}{4} \times \frac{7}{16}$	$\frac{4_{1}}{4_{2}} \times \frac{7}{16}$	$5 \times \frac{7}{16}$	$5\frac{1}{2} \times \frac{7}{1}$
$10_{ m under}^{ m and} 12$	$3 \times \frac{6}{16}$	$3 \times \frac{6}{16}$	$3\frac{1}{4} \times \frac{6}{16}$	$3\frac{1}{2} \times \frac{6}{16}$	$3\frac{1}{2} \times \frac{6}{16}$	$3\frac{3}{4} \times \frac{6}{16}$	$4 \times \frac{6}{16}$	$3\frac{3}{4} \times \frac{6}{16}$	$4 \times \frac{6}{16}$	$4 \times \frac{7}{16}$				$4\frac{1}{4} \times \frac{7}{16}$	$4\frac{1}{2} \times \frac{7}{16}$	$4\frac{3}{4} \times \frac{7}{16}$	$5\frac{1}{2} \times \frac{7}{16}$	$5\frac{3}{4} \times \frac{7}{1}$
$12_{\mathrm{under}}^{\mathrm{and}}14$	$3\frac{1}{4} \times \frac{6}{16}$	$3\frac{1}{2} \times \frac{6}{16}$	$3\frac{3}{4} \times \frac{6}{16}$	$4 \times \frac{6}{16}$	$4 \times \frac{6}{16}$	$4 \times \frac{7}{16}$	$4\frac{1}{4} \times \frac{7}{16}$	$4 \times \frac{6}{16}$	$4 \times \frac{7}{16}$	$4\frac{1}{4} \times \frac{7}{16}$					$5 \times \frac{7}{16}$	$5\frac{1}{2} \times \frac{7}{16}$	$6 \times \frac{8}{16}$	$6 \times \frac{9}{10}$
$14_{\mathrm{under}}^{\mathrm{and}}16$		$3\frac{3}{4} \times \frac{6}{16}$	$4 \times \frac{6}{16}$	$4 \times \frac{7}{16}$	$\frac{4\frac{1}{8} \times \frac{7}{16}}{}$	$4\frac{1}{4} \times \frac{7}{16}$	$4\frac{1}{2} \times \frac{7}{16}$	$4\frac{1}{8} \times \frac{7}{16}$	$4\frac{1}{4} \times \frac{7}{16}$	$4\frac{1}{2} \times \frac{7}{16}$						$5\frac{1}{2} \times \frac{8}{16}$	$6 \times \frac{8}{16}$	$6 \times \frac{9}{16}$
16 and under 18			$4\frac{1}{8} \times \frac{7}{16}$	$4\frac{1}{4} \times \frac{7}{16}$	$4\frac{1}{2} \times \frac{7}{16}$	$4\frac{3}{4} \times \frac{7}{16}$	$5 \times \frac{7}{16}$	$4\frac{1}{2} \times \frac{7}{16}$	$4\frac{3}{4} \times \frac{7}{16}$	$5 \times \frac{7}{16}$						$6 \times \frac{8}{16}$	$6 \times \frac{9}{16}$	$6\frac{1}{4} \times \frac{9}{16}$
18 and 20			$4\frac{1}{4} \times \frac{7}{16}$	$4\frac{1}{2} \times \frac{7}{16}$	$4\frac{3}{4} \times \frac{7}{16}$	$5 \times \frac{7}{16}$	$5\frac{1}{4} \times \frac{7}{16}$	$4\frac{3}{4} \times \frac{7}{16}$	$5 \times \frac{7}{16}$	$5\frac{1}{4} \times \frac{7}{16}$							$6 \times \frac{9}{16}$	$6\frac{1}{4} \times \frac{9}{16}$
$20_{\mathrm{under}}^{\mathrm{and}}22$				$4\frac{3}{4} \times \frac{7}{16}$	$5 \times \frac{7}{16}$	$5\frac{1}{4} \times \frac{7}{16}$	$5\frac{1}{2} \times \frac{8}{16}$	$5 \times \frac{7}{16}$	$5\frac{1}{4} \times \frac{7}{16}$	$5\frac{1}{2} \times \frac{8}{16}$							$6\frac{1}{4} \times \frac{9}{16}$	$6\frac{3}{4} \times \frac{9}{16}$
22 and 24				$5\frac{1}{4} \times \frac{7}{16}$	$5\frac{1}{4} \times \frac{7}{16}$	$5\frac{1}{2} \times \frac{8}{16}$	$6 \times \frac{8}{16}$	$5\frac{1}{4} \times \frac{7}{16}$	$5\frac{1}{2} \times \frac{8}{16}$	$3 \times \frac{8}{16}$								$7 \times \frac{9}{16}$
$24_{ m under}^{ m and}26$					$5\frac{1}{4} \times \frac{7}{16}$	$5\frac{1}{2} \times \frac{8}{16}$	$3 \times \frac{8}{16}$	$5\frac{1}{4} \times \frac{7}{16}$	$5\frac{1}{2} \times \frac{8}{16}$	$3 \times \frac{8}{16}$								
$26_{ m under}^{ m and}28$					($3 \times \frac{8}{16}$	$3 \times \frac{9}{16}$	$5\frac{1}{2} \times \frac{8}{16}$	$3 \times \frac{8}{16}$	$3 \times \frac{9}{16}$								
28 and 30						6	$\beta_{\frac{1}{4}} \times \frac{9}{16}$	$6 \times \frac{8}{16}$	$3 \times \frac{9}{16}$	$B_{\frac{1}{4}} \times \frac{9}{16}$								
$30_{\mathrm{under}}^{\mathrm{and}}32$								$6 \times \frac{9}{16}$	$3\frac{1}{4} \times \frac{9}{16}$	$3\frac{3}{4} \times \frac{9}{16}$								
			1	PILLARS T	O AWNING	, BRIDGE,	FORECAS	TLE, AND	POOP DEC	K BEAMS.								
6 and 8	$2\frac{1}{2} \times \frac{5}{16}$	$2\frac{1}{2} \times \frac{5}{16}$	$2\frac{3}{4} \times \frac{5}{16}$	$2\frac{3}{4} \times \frac{5}{16}$	$3 \times \frac{5}{16}$	$8 \times \frac{6}{16} 3$	$8\frac{1}{4} \times \frac{6}{16}$	$3 \times \frac{6}{16} 3$	$\frac{1}{4} \times \frac{6}{16}$	$8\frac{1}{2} \times \frac{6}{16}$	$3\frac{1}{4} \times \frac{6}{16}$	$3\frac{1}{2} \times \frac{6}{16}$	$\frac{3}{4} \times \frac{6}{16}$					

LLOYD'S REGISTER OF SHIPPING, 2, WHITE LION COURT, CORNHILL, LONDON, E.C.—26th April, 1900.

DR MAIN DECK BEAMS.				PILL	ARS TO LOW	ER DECK I	BEAMS.		CHARLES PROPERTY.	PILLA	ARS TO OR	LOP DECK 1		
Two rows of Pillars.	ee rows of Pillars.	One row	of Pillars.	Tw	vo rows of Pil	lars.	Three	rows of P	illars.	Two rows of Pillars.	li	ree rows of P		
MIDSHIPS IN FEET.				LENGTHS	S OF BEAMS	AMIDSHIPS	S IN FEET.			LENGTHS	1	AMIDSHIP		LENGTH
43 47 51 55	59 63	35	39	43	47	51	55	59	63	51	55	59	63	PILLAR.
ins. $\frac{1}{4} \times \frac{7}{16} = \frac{4\frac{1}{2} \times \frac{7}{16}}{4\frac{1}{2} \times \frac{7}{16}} = \frac{4\frac{1}{3} \times \frac{7}{16}}{4\frac{1}{2} \times \frac{7}{16}} = \frac{1}{4\frac{1}{2} \times \frac{7}{16}}$	$4\frac{3}{4} \times \frac{7}{16} $ ins. $5 \times \frac{7}{16}$	$5\frac{3}{4} \times \frac{8}{16}$	$6 \times \frac{8}{16}$	$5\frac{1}{2} \times \frac{7}{16}$	$5\frac{3}{4} \times \frac{8}{16}$	$6 \times \frac{8}{16}$	$5\frac{3}{4} \times \frac{8}{16} 6$	ins. $\times \frac{8}{16}$	$6 \times \frac{9}{16}$	$\frac{1}{6\frac{1}{4} \times \frac{9}{16}}$	$6 \times \frac{9}{16}$	$\frac{1}{6\frac{1}{4} \times \frac{9}{16}}$		Feet. 6 and under 8
$\frac{3}{1} \times \frac{7}{16} = 5 \times \frac{7}{16} = 5 \frac{1}{2} \times \frac{7}{16} = 5 \times \frac{7}{16}$	$5\frac{1}{2} \times \frac{7}{16}$ $5\frac{3}{4} \times \frac{8}{16}$	$6 \times \frac{9}{16}$	$6 \times \frac{9}{16}$	$5\frac{3}{4} \times \frac{8}{16}$	$6 \times \frac{9}{16}$	$6 \times \frac{9}{16}$	$6 \times \frac{8}{16} 6$	X 9/16	$6\frac{1}{4} \times \frac{9}{16}$	$6\frac{1}{2} \times \frac{9}{16}$	$6\frac{1}{4} \times \frac{9}{16}$	$6\frac{1}{4} \times \frac{9}{16}$	$\frac{6\frac{1}{2} \times \frac{9}{16}}{6\frac{1}{2} \times \frac{9}{16}}$	8 and 10
$\times \frac{7}{16} 5\frac{1}{2} \times \frac{7}{16} 5\frac{3}{4} \times \frac{7}{16} 5\frac{1}{2} \times \frac{7}{16}$	TO ACCOUNT OF THE PARTY OF THE	$6 \times \frac{9}{16}$	$6 \times \frac{9}{16}$	$6 \times \frac{8}{16}$	$6 \times \frac{9}{16}$	$6 \times \frac{9}{16}$	$6 \times \frac{8}{16} 6$	X 9/16	$6\frac{1}{4} \times \frac{9}{16}$	$6\frac{1}{2} \times \frac{9}{16}$	$6\frac{1}{4} \times \frac{9}{16}$	$6\frac{1}{4} \times \frac{9}{16}$	$6\frac{1}{2} \times \frac{9}{16}$	$10_{ m under}^{ m and} 12$
$\times \frac{7}{16} 6 \times \frac{8}{16} 6 \times \frac{9}{16} 6 \times \frac{8}{16}$			$6\frac{1}{4} \times \frac{9}{16}$	$6 \times \frac{9}{16}$	$6\frac{1}{4} \times \frac{9}{16}$	$\frac{3_1}{4} \times \frac{9}{16}$	$6 \times \frac{9}{16} 6$	$\frac{1}{4} \times \frac{9}{16}$	$6\frac{1}{2} \times \frac{9}{16}$	$7 \times \frac{9}{16}$	$6\frac{1}{2} \times \frac{9}{16}$	$6\frac{1}{2} \times \frac{9}{16}$	$7 \times \frac{9}{16}$	$12_{ m under}^{ m and}14$
$\times \frac{8}{16} 6 \times \frac{8}{16} 6 \times \frac{9}{16} 6 \times \frac{8}{16}$				$6 \times \frac{9}{16}$	$6\frac{1}{4} \times \frac{9}{16} \left(\frac{9}{16} \right)$	$3\frac{1}{4} \times \frac{9}{16}$	$3 \times \frac{9}{16} 6$	$\frac{1}{4} \times \frac{9}{16}$	$3\frac{3}{4} \times \frac{9}{16}$	$7 \times \frac{9}{16}$	$6\frac{3}{4} \times \frac{9}{16}$	$7 \times \frac{9}{16}$	$7 \times \frac{9}{16}$	$14_{\mathrm{under}}^{\mathrm{and}}16$
$\times \frac{8}{16} 6 \times \frac{9}{16} 6 \frac{1}{4} \times \frac{9}{16} 6 \times \frac{8}{16}$				$3\frac{1}{4} \times \frac{9}{16}$	$6\frac{1}{4} \times \frac{9}{16} = 6$	$\frac{3}{4} \times \frac{9}{16}$	$6\frac{1}{4} \times \frac{9}{16} = 6\frac{3}{4}$	$\frac{9}{16} \times \frac{9}{16}$	$7 \times \frac{9}{16}$	$7\frac{1}{4} \times \frac{10}{16}$	$7 \times \frac{9}{16}$	$7\frac{1}{4} \times \frac{10}{16}$	$7\frac{1}{4} \times \frac{10}{16}$	16 and 18
$\times \frac{8}{16} 6 \times \frac{9}{16} 6 \frac{1}{4} \times \frac{9}{16} 6 \times \frac{8}{16}$				($6\frac{1}{4} \times \frac{9}{16} 6$	$\frac{3}{4} \times \frac{9}{16}$	$\frac{3}{4} \times \frac{9}{16} 6_4^3$	$\times \frac{9}{16} 7$	$\times \frac{9}{16}$	7	$7 \times \frac{9}{16}$	$7\frac{1}{2} \times \frac{10}{16}$	$7\frac{1}{2} \times \frac{10}{16}$	18 and 20
$\times \frac{9}{16} \frac{61}{4} \times \frac{9}{16} \frac{61}{4} \times \frac{9}{16} \frac{6}{6} \times \frac{9}{16}$				6	$6\frac{3}{4} \times \frac{9}{16}$	$\times \frac{9}{16}$	$\times \frac{9}{16}$ 7	$\times \frac{9}{16}$	$\frac{1}{2} \times \frac{10}{16}$		8	$8 \times \frac{11}{16} 8$	× 11/16	20 and 22
$\times \frac{9}{16} \frac{6\frac{3}{4} \times \frac{9}{16}}{6\frac{3}{4} \times \frac{9}{16}} \frac{6\frac{1}{4} \times \frac{9}{16}}{6\frac{1}{4} \times \frac{9}{16}}$					7-	$\frac{1}{2} \times \frac{10}{16}$	$\frac{1}{2} \times \frac{10}{16} 7_{\frac{1}{2}}$	$\times \frac{10}{16}$ 8	$\times \frac{11}{16}$					22 and 24
$\times \frac{9}{16} 6\frac{3}{4} \times \frac{9}{16} 6\frac{3}{4} \times \frac{9}{16} 6\frac{1}{4} \times \frac{9}{16}$	A CONTRACTOR OF THE CONTRACTOR				8	$\times \frac{10}{16}$ 8	× 1 0 8	× 10/16	× 11/16					$24_{\mathrm{under}}^{\mathrm{and}}26$
$\times \frac{9}{16} 7\frac{1}{4} \times \frac{10}{16} 7\frac{1}{4} \times \frac{10}{16} 6\frac{3}{4} \times \frac{9}{16}$						8	× 1 1 8	$\times \frac{11}{16} 8$	$\frac{1}{2} \times \frac{11}{16}$					26 and 28
$\times \frac{10}{16} 8 \times \frac{10}{16} 8 \times \frac{10}{16} 7_{\frac{1}{4}} \times \frac{10}{16}$									No. 1 to a second property and					28 and 30
														30 and 32

Pillars under wide spaced hold beams may be of the sizes required for pillars of the same length under the deck next above the hold beams.

If a middle deck is intended exclusively for the accommodation of passengers, the pillars between this deck and the floors may be a quarter of an inch less in diameter than is required by the Table, and where the lower deck is also than required by the Table.

.




STEEL VESSELS.

Table of Minimum Dimensions of KEELS, STEE

								-
VIII.		Stem of	Gtorn 6			TH	HICK	NESS (
NUMBERS. For Keel, Stem, Sternpost,	Bar Keels	Sailing Vessels, and Steamers, and	Stern frames of	Flat Plate K all grades, b and thick	readth,			d thickness.
and Plating. (See Section 2.)	All Grades.	Sternpost of Sailing Vessels and Paddle	Screw Steamers.	Three-fifths		100 <i>A</i>	1	90A
(See Section 2.)		Steamers.	Noowale 15.	length amidships.	Ends.	Half length amidships	Ends.	Half length amidships.
2600 and under 3300	$6 \times 1_{8}$	$5\frac{1}{2} imes 1\frac{1}{8}$	inches. $5\frac{1}{4} \times 2\frac{1}{4}$	inches. 30×8	6	30× 6	6	inches. 30×6
3300 and 4200	$6\frac{1}{2} \times 1\frac{1}{8}$	$5\frac{3}{4} imes 1\frac{1}{8}$	$5\frac{3}{4} \times 2\frac{1}{2}$	30× 8	6	30× 7	7	30× 6
4200 and under 5100	$6\frac{3}{4} \times 1\frac{1}{4}$	$6 \times 1\frac{1}{4}$	$6 \times 2\frac{1}{2}$	30×9	7	30×7	7	30×6
5100 and 6000	$7 \times 1\frac{3}{8}$	$6 \times 1\frac{3}{8}$	6 ×3	31× 9	8	31× 8	8	31× 7
6000 and 6900	$7 \times 1\frac{1}{2}$	$6\frac{1}{4} \times 1\frac{1}{2}$	$6\frac{1}{4} \times 3$	31×10	8	31× 8	8	31× 7
6900 and 7700	$7 \times 1\frac{5}{8}$	$6\frac{1}{4} \times 1\frac{5}{8}$	$6\frac{1}{2} \times 3\frac{1}{4}$	31×11	8	31× 9	8	31× 8
7700 and under 8500	$7 \times 1\frac{3}{4}$	$6\frac{1}{2} \times 1\frac{3}{4}$	$6\frac{1}{2} \times 3\frac{1}{2}$	31×12	9	31× 9	8	31× 8
8500 and 9300	$7\frac{1}{4} \times 1\frac{7}{8}$	$6\frac{1}{2} \times 1\frac{7}{8}$	$6\frac{1}{2} \times 3\frac{3}{4}$	32×12	9	32×9	8	32× 8
9300 and 10100	$7\frac{1}{2} \times 1\frac{7}{8}$	$6\frac{3}{4} \times 1\frac{7}{8}$	$6\frac{3}{4} \times 4$	32×12	9	32×9	8	32×8
10100 and 10900	$7\frac{1}{2} \times 2$	$6\frac{3}{4} \times 2$	$6\frac{3}{4} \times 4\frac{1}{4}$	32×12	9	32×9	8	32× 8
10900 and 11600	$7\frac{1}{2} \times 2\frac{1}{8}$	$7 \times 2\frac{1}{8}$	$7 \times 4\frac{1}{4}$	33×12	9	33× 9	8	33× 8
11600 and 12400	$7\frac{1}{2} \times 2\frac{1}{4}$	$7 \times 2\frac{1}{4}$	$7 \times 4\frac{1}{2}$	33×12	9	33×10	9	33× 9
12400 and 13100	$8 \times 2\frac{1}{4}$	$7 \times 2\frac{1}{4}$	$7 \times 4\frac{3}{4}$	33×13	10	33×10	9	33× 9
13100 and under 13900	$8 \times 2\frac{1}{4}$	$7 \times 2\frac{1}{4}$	$7\frac{1}{4} \times 4\frac{3}{4}$	34×13	10	34×10	9	34× 9
13900 and 14700	$8 \times 2\frac{3}{8}$	$7\frac{1}{4} \times 2\frac{3}{8}$	$7\frac{1}{2} \times 4\frac{3}{4}$	34×14	11	34×11	10	34×10
14700 and under 15600	$8 \times 2\frac{3}{8}$	$7\frac{1}{2} \times 2\frac{3}{8}$	$8 \times 4\frac{3}{4}$	35×14	11	35×11	10	35×10
15600 and under 16600	$8\frac{1}{2} \times 2\frac{3}{8}$	$8 \times 2\frac{3}{8}$	8 ×5	36×14	11	36×11	10	36×10
16600 and 17600	$9 \times 2\frac{3}{8}$	$8\frac{1}{2} \times 2\frac{3}{8}$	$8\frac{1}{2} \times 5$	36×14	11	36×11	10	36×10
17600 and under 18700	$9 \times 2\frac{1}{2}$	$8_{\frac{1}{2}} \times 2_{\frac{1}{2}}$	$8\frac{1}{2} \times 5$	36×16	12	36×12	11	36×11

OUTS	DE PL	ATING	$1N \frac{1}{20}$	THS. O	FA	N INC	Н.			
From Garbo		wer edge of Si		Sheerstrake all grades, by and thickn	readth,	From main to Sheerstral Spar-decked	ke in	Spar deck Shee		Awning deck and Bridge Side Plating also Poops,
Half length amidships.	Ends.	Half length amidships.	Ends.	Half length amidships.	Ends.	Half length amidships.	Ends.	Half length amidships.	Ends.	and Forecastles.
5 * 6	5	5	5	inches. 30×6	5			inches.		
6	5	5 & 6	5	30× 7	6		•••	•••		
6	5	5 & 6	5	31× 7	6					
6 . 7	5 & 6	6	5	31 × 8	7					
6 & 7	5 & 6	6	5	32× 8	7					•••
7	6	6 & 7	5 & 6	32× 9	8				•••	•••
7 (a)	6	6 & 7	5 & 6	33× 9	8	•••				•••
7 & 8	6 & 7	7	6	33×10	8					•••
7 & 8	6 & 7	7	6	34×10	8					•••
8	7	7 & 8	6 & 7	34×10	8					5
8	7	7 & 8	6 & 7	35×10	8					5
8 & 9	7 & 8	8	7	35×10	8	•••				5
8 & 9	7 & 8	8	7	36×10	8			`		5
9	8	8 & 9	7 & 8	36×11	9	7	6	36× 9	8	6
9 (b)	8	8 & 9	7 & 8	38×11	9	7	6	38× 9	8	6
9 & 10	8	9	8	38×11	9	7	6	38× 9	8	6
9 & 10	8	9	8	40×12	9	8	7	40×10	8	6
10	8	9 & 10	8	40×12	9	8	7	40×10	8	6
10	8.	9 & 10	8	42×13	10	8	7	40×11	9	6

For foot notes-see continuation.

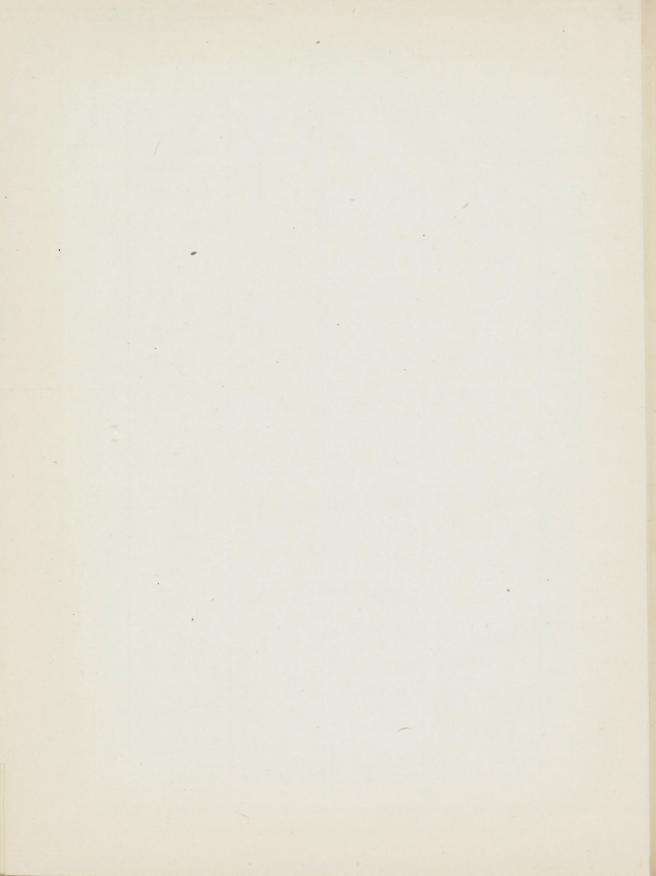



STEEL VESSELS.

Table of Minimum Dimensions of KEELS,

						TL		NECC	051
NUMBERS. For Keel, Stem, Sternpost,	Bar Keels	Stem of Sailing Vessels, and Steamers,	Stern frames	Flat Plate Ke all grades, br	eadth,	G	arboard	NESS Strakes,	OF
and Plating.	for	and Sternpost of Sailing Vessels	Screw	and thickn	ess.+				
(See Section 2.)	All Grades.	and Paddle Steamers.	Steamers.	Three-fifths length	Ends.	100A Half length		90A Half length	-
	1	,		amidships.		amidships.	Ends.	amidships.	Ends.
18700 and 19900	inches. $9\frac{1}{2} \times 2\frac{1}{2}$	$9 \times 2\frac{1}{2}$	9×5	36×16	12	36×12	11		
19900 and 21300	$9\frac{1}{2} \times 2\frac{1}{2}$	$9 \times 2\frac{1}{2}$	$9 \times 5\frac{1}{2}$	36×16	12	36×12	11	•••	
21300 and under 22900	$10 \times 2\frac{1}{2}$	$10 \times 2\frac{1}{2}$	$10^{\circ} \times 5\frac{1}{2}$	36×16	12	36×12	11		
22900 and 24600 under 24600	$10 \times 2\frac{5}{8}$	$10 \times 2\frac{5}{8}$	10 × 6	36×16	12	36×12	11		
24600 and 26500 under 26500	$10 \times 2\frac{3}{4}$	$10 \times 2\frac{3}{4}$	10 × 6	36×16	12	36×12	11		
26500 and 28700 under 28700	$10\frac{1}{2} \times 2\frac{3}{4}$	$10\frac{1}{2} \times 2\frac{3}{4}$	11 ×6	36×16	12	36×12	11		
28700 and 31200	$11 \times 2\frac{3}{4}$	$11 \times 2\frac{3}{4}$	$11 \times 6\frac{1}{2}$	36×17	13	36×13	12		
31200 and under 33900	$11 \times 2\frac{7}{8}$	$11 \times 2\frac{7}{8}$	$11 \times 6\frac{3}{4}$	36×17	13	36×13	12		
33900 and under 36800	11 ×3	11 ×3	11 ×7	36×18	14	36×14	13		
36800 and 40000	$11 \times 3\frac{1}{8}$	$11 \times 3\frac{1}{8}$	$11 \times 7\frac{1}{2}$	36×18	14	36×14	13		
40000 and 43400	$11\frac{1}{2} \times 3\frac{1}{8}$	$11\frac{1}{2} \times 3\frac{1}{8}$	$11\frac{1}{2} \times 7\frac{1}{2}$	36×18	14	36×14	13		
43400 and under 47100	$12 \times 3\frac{1}{8}$	$12 \times 3\frac{1}{8}$	$12 \times 7\frac{3}{4}$	36×18	14	36×14	13		
47100 and under 51000	$12 \times 3\frac{1}{4}$	$12 \times 3\frac{1}{4}$	$12\frac{1}{2} \times 7\frac{3}{4}$	36×20	15	36×15	14		
51000 and under 55200	$12 \times 3\frac{3}{8}$	$12 \times 3\frac{3}{8}$	13 ×8	36×20	15	36×15	14		
55200 and under 59700	$12 \times 3\frac{1}{2}$	$12 \times 3\frac{1}{2}$	$13 \times 8\frac{1}{2}$	36×20	15	36×15	14		
59700 and under 64600	$12 \times 3\frac{5}{8}$	$12 \times 3\frac{5}{8}$	13 ×9	36×20	15	36×15	14		
64600 and red red red red red red red red red re	$12 \times 3\frac{3}{4}$	$12 \times 3\frac{3}{4}$	$13 \times 9\frac{1}{2}$	36×21	16	36×16	15		

MEM.—The Scantlings given in the above Table are intended for Vessels the length of which does not exceed eleven times their depth from top of keel, see Section 1. For Vessels which exceed this proportion, see Section 46 and Table S 6. For proportions of breadth to length, see Table S 5.

LLOYD'S REGISTER OF SHIPPING, 2, WHITE LION COURT, CORNHILL, LONDON, E.C. 29th November, 1888.


(Continued).

		-					
OUTSIDE	PLATING	IN	$\frac{1}{20}$ THS.	OF	AN	INCH	

From Garbo	pard to the lo	wer edge of Sl		Sheerstrake all grades, bi	readth,	From main t	te in	Spar deck Shee	1	Awning deck and Bridge Side Plating,
100	A	90	A	and thick	less.	Spar-decked	vessels.			also Poops,
Half length amidships.	Ends.	Half length amidships.	Ends.	Half length amidships.	Ends.	Half length amidships.	Ends.	Half length amidships.	Ends.	Forecastles.
10 & 11	8 & 9			inches. 42×13	10	8	7	40×11	9	7
10 & 11	8 & 9			42×13	10	8	7	40×11	9	7
11	9	•••		42×13	10	8	7	40×11	9	7
11	9			42×13	10	8	7	40×11	9	7
11 & 12	9	•••	•••	42×13	10	8	7	40×11	9	7
11 & 12	9	•••		44×13	10	8	7	40×11	9	7
12	9			44×13	10	9	8	40×11	9	7
12	9		•••	44×13	10	9	8	40×11	9	7
12 & 13	9 & 10			44×14	11	9	8	40×12	9	7
12 & 13	9 & 10	• • • • •		44×14	11	9	8	40×12	9	7
13	10			44×14	11	9	8	40×12	9	7
13	10		'	46×15	12	9	8	40×13	10	
13 * 14	10 & 11	•••		46×15	12	9	8	40×13	10	•••
13 & 14 (e)	10 & 11			46×16	13	9	8	40×14	11	
14	11		•••	46×16	13	9	8	40×14	11	•••
14 (e)	11		• • •	46×16	13	9	8	40×14	11	
14 & 15	11 & 12			46×16	13	9	8	40×14	11	

^{*} In the columns for plating, where two thicknesses are given they are to be worked in alternate strakes, and the larger thickness is to apply to the outer strakes, and the smaller one to the inner strakes: and the size of the rivets and double riveting to be regulated by the thickness of the thicker plating.

[†] Where the number is 26,000 and above, the flat plate keel to be doubled for one-half the vessel's length amidships (see Sections 5 and 9).

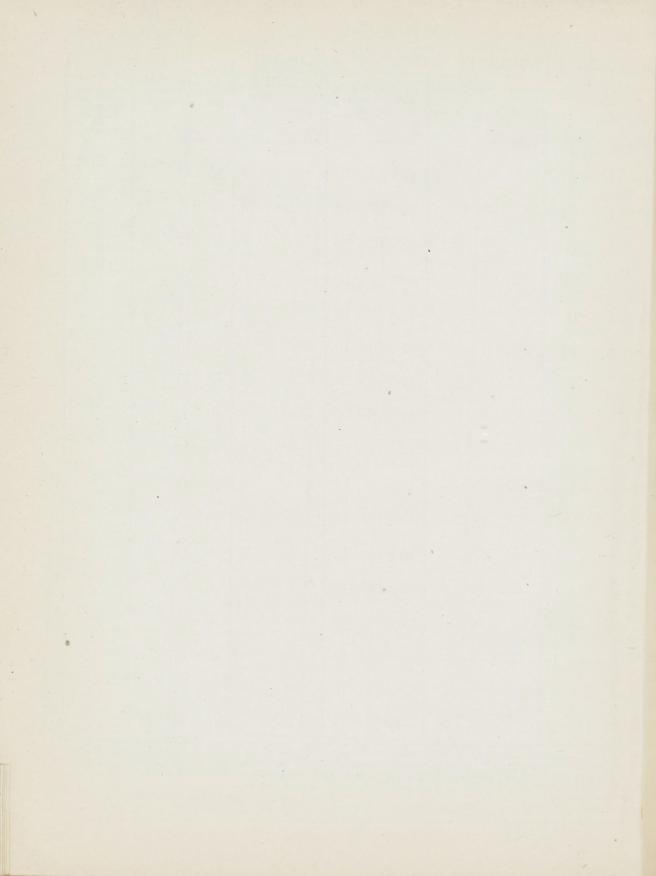

STEEL VESSELS.

Table of Minimum Dimensions of KEELSONS, KEELSON AND STRINGER

					0, 11===0011 /1	TO OTHER DELL	
NUMBERS. To regulate keelsons stringers, decks, rudders, and celling. (See Section 2.)	upon floors, and thickness or rider plate to keelson.		Thick- ness of Dimensions of		Dimensions of angle bar on the middle, lower or hold, and orlop beam stringer plates, on upper deck stringer plates in spar-decked, and awning-decked vessels.	Dimensions of angle bars on upper deck stringer plates.	
Under 2800	inches. $7\frac{1}{2} \times \frac{6}{20}$	inches. $\frac{5}{20}$	inches.	$3 \times 3 \times \frac{6}{20}$	inches. $3 \times 2\frac{1}{2} \times \frac{6}{20}$	$3 \times 3 \times \frac{6}{20}$	
						2 2 2	
2800 and under 4100	$\frac{8\frac{1}{2}\times\frac{7}{20}}{2}$	$\frac{6}{20}$	$\frac{5}{20}$	$\frac{3\times3\times\frac{6}{20}}{3}$	20	20	
4100 and 5400	$9 \times \frac{8}{20}$	$\frac{7}{20}$	$\frac{5}{20}$	$3 \times 3 \times \frac{6}{20}$	$3 \times 3 \times \frac{6}{20}$	$\frac{3\times3\times\frac{6}{20}}{}$	
5400 and 6700	$10 \times \frac{8}{20}$	$\frac{7}{20}$	$\frac{5}{20}$	$3 \times 3 \times \frac{6}{20}$	$3 \times 3 \times \frac{6}{20}$	$3 \times 3 \times \frac{6}{20}$	
6700 and 7900	$11 \times \frac{9}{20}$	$\frac{7}{20}$	$\frac{6}{20}$	$3\frac{1}{2} \times 3 \times \frac{6}{20}$	$3 \times 3 \times \frac{6}{20}$	$3 \times 3 \times \frac{7}{20}$	
7900 and under 9100	$12 \times \frac{9}{20}$	$\frac{7}{20}$	$\frac{6}{20}$	$3\frac{1}{2} \times 3 \times \frac{6}{20}$	$3 \times 3 \times \frac{6}{20}$	$3 \times 3 \times \frac{7}{20}$	
9100 and 10300	$12 \times \frac{9}{20}$	$\frac{7}{20}$	$\frac{6}{20}$	$4 \times 3 \times \frac{6}{20}$	$3\frac{1}{2} \times 3\frac{1}{2} \times \frac{6}{20}$	$3\frac{1}{2} \times 3\frac{1}{2} \times \frac{7}{20}$	
10300 and 11400	$12 \times \frac{10}{20}$	$\frac{8}{20}$	$\frac{7}{20}$	$4\frac{1}{2} \times 3 \times \frac{7}{20}$	$3\frac{1}{2} \times 3\frac{1}{2} \times \frac{7}{20}$	$3\frac{1}{2} \times 3\frac{1}{2} \times \frac{7}{20}$	
11400 and 12600	$13 \times \frac{10}{20}$	$\frac{8}{20}$	$\frac{7}{20}$	$4\frac{1}{2} \times 3\frac{1}{2} \times \frac{7}{20}$	$3\frac{1}{2} \times 3\frac{1}{2} \times \frac{7}{20}$	$4 \times 4 \times \frac{7}{20}$	
12600 and 13800	$14 \times \frac{11}{20}$	$\frac{9}{20}$	$\frac{7}{20}$	$5 \times 3\frac{1}{2} \times \frac{7}{20}$	$3\frac{1}{2} \times 3\frac{1}{2} \times \frac{8}{20}$	$4 \times 4 \times \frac{8}{20}$	
13800 and 15100	$15 \times \frac{11}{20}$	$\frac{9}{20}$	$\frac{7}{20}$	$5 \times 3\frac{1}{2} \times \frac{8}{20}$	$3\frac{1}{2} \times 3\frac{1}{2} \times \frac{8}{20}$	$4 \times 4 \times \frac{8}{20}$	
15100 and 16500	$16 \times \frac{12}{20}$	$\frac{10}{20}$	$\frac{8}{20}$	$5 \times 3\frac{1}{2} \times \frac{9}{20}$	$4 \times 4 \times \frac{8}{20}$	$4\frac{1}{2} \times 4\frac{1}{2} \times \frac{9}{20}$	
16500 and under 18000	$17 \times \frac{12}{20}$	$\frac{10}{20}$	$\frac{8}{20}$	$5 \times 4 \times \frac{9}{20}$	$4 \times 4 \times \frac{9}{20}$	$4\frac{1}{2} \times 4\frac{1}{2} \times \frac{9}{20}$	
18000 and 19700	$18 \times \frac{13}{20}$	$\frac{1}{2}\frac{1}{0}$	$\frac{8}{20}$	$5\frac{1}{2} \times 4 \times \frac{9}{20}$	$4 \times 4 \times \frac{9}{20}$	$4\frac{1}{2} \times 4\frac{1}{2} \times \frac{9}{20}$	
19700 and 21700	$19 \times \frac{13}{20}$	$\frac{11}{20}$	$\frac{8}{20}$	$5\frac{1}{2} \times 4 \times \frac{9}{20}$	$4 \times 4 \times \frac{9}{20}$	$4\frac{1}{2} \times 4\frac{1}{2} \times \frac{9}{20}$	
21700 and under 24100	$20 \times \frac{13}{20}$	$\frac{11}{20}$	$\frac{9}{20}$	$6 \times 4 \times \frac{9}{20}$	$4 \times 4 \times \frac{9}{20}$	$4\frac{1}{2} \times 4\frac{1}{2} \times \frac{10}{20}$	
24100 and 27000	$20 \times \frac{14}{20}$	$\frac{12}{20}$	$\frac{9}{20}$	$6\frac{1}{2} \times 4 \times \frac{9}{20}$	$4 \times 4 \times \frac{9}{20}$	$4\frac{1}{2} \times 4\frac{1}{2} \times \frac{10}{20}$	
27000 and and 30400	$22 \times \frac{14}{20}$	$\frac{1}{2}\frac{2}{0}$	$\frac{9}{20}$	$6\frac{1}{2} \times 4 \times \frac{9}{2.0}$	$4 \times 4 \times \frac{9}{20}$	$4\frac{1}{2} \times 4\frac{1}{2} \times \frac{10}{20}$	
30400 and 34300	$23 \times \frac{14}{20}$	$\frac{12}{20}$	$\frac{9}{20}$	$6\frac{1}{2} \times 4\frac{1}{2} \times \frac{9}{20}$	$4 \times 4 \times \frac{9}{20}$	$4\frac{1}{2} \times 4\frac{1}{2} \times \frac{11}{20}$	
34300 and under 38800	$25 \times \frac{14}{20}$	$\frac{12}{20}$	$\frac{9}{20}$	$6\frac{1}{2} \times 4\frac{1}{2} \times \frac{10}{20}$	$4 \times 4 \times \frac{9}{20}$	$4\frac{1}{2} \times 4\frac{1}{2} \times \frac{11}{20}$	
38800 and 43900	$27 \times \frac{14}{20}$	$\frac{1}{2}\frac{2}{0}$	$\frac{9}{20}$	$6\frac{1}{2} \times 4\frac{1}{2} \times \frac{10}{20}$	$4 \times 4 \times \frac{9}{20}$	$5 \times 5 \times \frac{11}{20}$	
43900 and under 49600	$29 \times \frac{14}{20}$	$\frac{1}{2}\frac{3}{0}$	$\frac{9}{20}$	$6\frac{1}{2} \times 4\frac{1}{2} \times \frac{10}{20}$	$4 \times 4 \times \frac{9}{20}$	$5 \times 5 \times \frac{11}{20}$	
49600 and 156000	$30 \times \frac{15}{20}$	$\frac{1}{2}\frac{3}{0}$	$\frac{9}{20}$	$6\frac{1}{2} \times 4\frac{1}{2} \times \frac{10}{20}$	$4 \times 4 \times \frac{9}{20}$	$5 \times 5 \times \frac{11}{20}$	
56000 and under 63000	$32 \times \frac{15}{20}$	$\frac{1}{2}\frac{3}{0}$	$\frac{9}{20}$	$6\frac{1}{2} \times 4\frac{1}{2} \times \frac{10}{20}$	$4 \times 4 \times \frac{9}{20}$	$5 \times 5 \times \frac{11}{20}$	
63000 and room room room room room room room roo	$32 \times \frac{15}{20}$	$\frac{1}{2}\frac{3}{0}$	$\frac{9}{20}$	$6\frac{1}{2} \times 4\frac{1}{2} \times \frac{10}{20}$	$4 \times 4 \times \frac{9}{20}$	$5 \times 5 \times \frac{11}{20}$	

MEM.—The Scantlings given in the above Table are intended for Vessels, the length of which does not exceed eleven times their depth

For proportions of breadth

Steam Vessels. Steam Vessel			P	Thickness	of IInne	er deck				
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	Sailing Vessels. Steam Vessels.*							meter of	bolt	of wood ceiling in
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	at the	of	main piece at	at the		main piece at heel.		Diam- eter of		upper part
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	inches.								inches.	
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$2\frac{7}{8}$	2	2×2	3	2	2×2	$2\frac{1}{2}$	$\frac{1}{2}$		2
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	3	2	2×2	$3\frac{1}{2}$	2	$2\frac{1}{2} \times 2$	3	$\frac{1}{2}$	•••	2
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$3\frac{1}{4}$	2	2 ×2	$3\frac{3}{4}$	$2\frac{1}{4}$	$2\frac{1}{2} \times 2\frac{1}{4}$	3	$\frac{1}{2}$	•••	2
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$3\frac{1}{2}$	2	$2\frac{1}{2} \times 2$	4	$2\frac{1}{4}$	$2\frac{3}{4} \times 2\frac{1}{4}$	3	$\frac{1}{2}$	$\frac{6}{20}$	2
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$3\frac{3}{4}$	$2\frac{1}{4}$	$2\frac{1}{2} \times 2\frac{1}{4}$	$4\frac{1}{4}$	$2\frac{1}{2}$	$2\frac{3}{4} \times 2\frac{1}{2}$	$3\frac{1}{2}$	9 16	$\frac{6}{20}$	$2\frac{1}{2}$
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	4	$2\frac{1}{4}$	$2\frac{3}{4} \times 2\frac{1}{4}$	$4\frac{1}{2}$	$2\frac{3}{4}$	$3 \times 2\frac{3}{4}$	$3\frac{1}{2}$	9 16		$2\frac{1}{2}$
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$4\frac{1}{4}$	$2\frac{1}{2}$	$2\frac{3}{4} \times 2\frac{1}{2}$	$4\frac{1}{2}$	$2\frac{3}{4}$	$3 \times 2\frac{3}{4}$	$3\frac{1}{2}$	9 16	$\frac{6}{20}$	$2\frac{1}{2}$
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$4\frac{1}{2}$	$2\frac{3}{4}$	$3 \times 2\frac{3}{4}$	$4\frac{3}{4}$	$2\frac{3}{4}$	$3\frac{1}{4} \times 2\frac{3}{4}$	$3\frac{1}{2}$	$\frac{9}{16}$	$\frac{6}{20}$	$2\frac{1}{2}$
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$4\frac{3}{4}$	$2\frac{3}{4}$	$3\frac{1}{4} \times 2\frac{3}{4}$	5	3	$3\frac{1}{4} \times 3$	$3\frac{1}{2}$	$\frac{9}{16}$	$\frac{6}{20}$	$2\frac{1}{2}$
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	5	3	$3\frac{1}{4} \times 3$	$5\frac{1}{4}$	3	$3\frac{1}{2} \times 3$	$3\frac{1}{2}$	$\frac{9}{16}$	$\frac{6}{20}$	$2\frac{1}{2}$
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$5\frac{1}{4}$	3	$3\frac{1}{2} \times 3$	$5\frac{1}{2}$	3	4 ×3	$3\frac{1}{2}$	$\frac{9}{16}$	$\frac{6}{20}$	$2\frac{1}{2}$
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$5\frac{1}{2}$	3	4×3	$5\frac{3}{4}$	3	$4\frac{1}{4} \times 3$	4	5/8	$\frac{6}{20}$	$2\frac{1}{2}$
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	6	3	$4\frac{3}{4} \times 3$	$6\frac{1}{4}$	$3\frac{1}{4}$	$4\frac{3}{4} \times 3\frac{1}{4}$	4	$\frac{5}{8}$	$\frac{6}{20}$	$2\frac{1}{2}$
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$6\frac{1}{4}$	$3\frac{1}{4}$	$4\frac{3}{4} \times 3\frac{1}{4}$	7	$3\frac{1}{2}$	$5\frac{1}{2} \times 3\frac{1}{2}$	4	<u>5</u> 8	$\frac{6}{20}$	$2\frac{1}{2}$
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$6\frac{3}{4}$	$3\frac{1}{2}$	$5 \times 3\frac{1}{2}$	$7\frac{1}{4}$	$3\frac{1}{2}$	$6 \times 3\frac{1}{2}$	4	$\frac{5}{8}$	$\frac{6}{20}$	$2\frac{1}{2}$
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	7	$3\frac{1}{2}$	$5\frac{1}{2} \times 3\frac{1}{2}$	$7\frac{3}{4}$	$3\frac{3}{4}$	$6\frac{1}{2} \times 3\frac{3}{4}$	4		$\frac{6}{20}$	$2\frac{1}{2}$
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$7\frac{1}{2}$	$3\frac{3}{4}$	$6 \times 3\frac{3}{4}$	8	4	$6\frac{1}{2} \times 4$	4	5/8	$\frac{6}{20}$	$2\frac{1}{2}$
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$7\frac{1}{2}$	$3\frac{3}{4}$	$6 \times 3\frac{3}{4}$	$8\frac{1}{2}$	$4\frac{1}{4}$	$6\frac{3}{4} \times 4\frac{1}{4}$	4	$\frac{5}{8}$	$\frac{7}{20}$	$2\frac{1}{2}$
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	8	4	$6\frac{1}{2} \times 4$	9	$4\frac{1}{2}$	$7 \times 4\frac{1}{2}$	4	$\frac{5}{8}$		$2\frac{1}{2}$
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$8\frac{1}{2}$	$4\frac{1}{2}$	$6\frac{1}{2} \times 4\frac{1}{2}$	$9\frac{1}{2}$	$4\frac{3}{4}$	$7\frac{1}{2} \times 4\frac{3}{4}$	4	5/8		$2\frac{1}{2}$
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$			•••	10	5	8×5	4	<u>5</u> 8		$2\frac{1}{2}$
11 $5\frac{1}{2}$ $8\frac{1}{2} \times 5\frac{1}{2}$ 4 $\frac{5}{8}$ $2\frac{1}{2}$			• • • •	$10\frac{1}{2}$	$5\frac{1}{4}$	$8\frac{1}{4} \times 5\frac{1}{4}$	4	<u>5</u> 8		$2\frac{1}{2}$
		•••		$10\frac{1}{2}$	$5\frac{1}{4}$	$8\frac{1}{4} \times 5\frac{1}{4}$	4	<u>5</u> 8		$2\frac{1}{2}$
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$		•••	•••	11	$5\frac{1}{2}$	$8\frac{1}{2} \times 5\frac{1}{2}$	4	5/8		$2\frac{1}{2}$
		•••	••••	11	$5\frac{1}{2}$	$8\frac{1}{2} \times 5\frac{1}{2}$	4	5/8	•••	$2\frac{1}{2}$

Where a steel deck is substituted for a wood one, it is not to be less than as (a) When the deck is of Teak, it may be one-sixth less in thickness. given above, and supported by beams as in the case of steel decks required by Table S 5. When the deck is of steel as required by the Rules, it is to be in thickness as given in Table S 5.

† For Single Plate Rudders, see Table S 3A.

008

* The diameters of rudder heads for Steam Vessels to be calculated by the following formula, but in no case is the diameter to be less than that given in the above Table :- $d = \frac{1}{3^{\frac{3}{2}}} \sqrt[3]{D \times b(2B-b) \times S^2}$

where d = diameter of rudder head in inches, D = feet draught, B = greatest distance in inches from the centre of pintles to back of rudder, b=the greatest breadth of rudder in inches and S=speed in knots.

from top of keel, see Section 1. For Vessels which exceed this proportion, see Section 46 and Table S6. to length, see Table S5.

or oti

		(a)	Diameter	Section of		ARM AT	EACH PIN	TLE KEYED	TO MAINPI	ECE.
-	NUMBER for regulating the Scantlings.	Diameter of the Head.	of Main- piece at Heel	Mainpiece at	Diameter of Pintles.	Depth and Thickness of Arm at	Thickness of Arm round	Depth and Thickness of Arm	Maximum Distance between Centres of	Thickn of Singl
		Heau.	(II Found)	(if rectangular)	,	Mainpiece.	Mainpiece.	at Point.	Arms.	in 20th
		inches.	mches.	inches. (b) (c)	inches.	inches.	inches.	inches	inches.	inche
	Under 2800	3	$\frac{2\frac{1}{2}}{}$	$2\times2\frac{1}{4}$	2	3×2	$\frac{1\frac{3}{8}}{}$	$\frac{2\frac{1}{2}\times\frac{3}{4}}{}$	45	15
	2800 and 4100	$3\frac{1}{2}$	$2\frac{3}{4}$	$2\frac{1}{2} \times 2\frac{3}{4}$	2	$3\frac{1}{2} \times 2\frac{1}{4}$	$1\frac{1}{2}$	$2\frac{3}{4} \times \frac{3}{4}$	45	15
	4100 _{under} 5400	$3\frac{3}{4}$	3	$2\frac{1}{2} \times 3$	$2\frac{1}{4}$	$3\frac{3}{4} \times 2\frac{3}{8}$	$1\frac{5}{8}$	$2\frac{3}{4} \times \frac{3}{4}$	48	16
	5400 and 6700	4	3	$2\frac{3}{4} \times 3$	$2\frac{1}{4}$	$4 \times 2\frac{1}{2}$	$1\frac{3}{4}$	$3 \times \frac{7}{8}$	48	16
	6700 and 7900	$4\frac{1}{4}$	$3\frac{1}{4}$	$2\frac{3}{4} \times 3\frac{3}{8}$	$2\frac{1}{2}$	$4\frac{1}{4} \times 2\frac{5}{8}$	$1\frac{7}{8}$	$3 \times \frac{7}{8}$	48	16
	7900 and 9100	$4\frac{1}{2}$	$3\frac{1}{2}$	$3 \times 3\frac{3}{4}$	$2\frac{3}{4}$	$4\frac{1}{2} \times 2\frac{3}{4}$	2	$3\frac{1}{4} \times \frac{7}{8}$	51	17
	9100 _{under} 10300	$4\frac{1}{2}$	$3\frac{1}{2}$	$3 \times 3\frac{3}{4}$	$2\frac{3}{4}$	$4\frac{1}{2} \times 2\frac{3}{4}$	-2	$3\frac{1}{4} \times \frac{7}{8}$	51	17
	10300 and 11400	$4\frac{3}{4}$	$3\frac{1}{2}$	$3\frac{1}{4} \times 3\frac{3}{4}$	$2\frac{3}{4}$	$4\frac{3}{4} \times 2\frac{7}{8}$	2 .	$3\frac{1}{4} \times \frac{7}{8}$	51	17
	11400 _{under} 12600	5	$3\frac{3}{4}$	$3\frac{1}{4} \times 4$	3	5×3	$2\frac{1}{8}$	$3\frac{1}{2} \times 1$	51	17
	12600 _{under} 13800	$5\frac{1}{4}$	4	$3\frac{1}{2} \times 4$	3	$5\frac{1}{4} \times 3\frac{1}{8}$	$2\frac{1}{4}$	$3\frac{1}{2} \times 1$	54	18
	13800 and 15100	$5\frac{1}{2}$	$4\frac{1}{4}$	4 ×4	3	$5\frac{1}{2} \times 3\frac{1}{8}$	$2\frac{1}{4}$	$3\frac{3}{4} \times 1$	54	18
	$15100_{\rm under}^{\rm and} 16500$	$5\frac{3}{4}$	$4\frac{1}{4}$	$4\frac{1}{4} \times 4$	3	$5\frac{3}{4} \times 3\frac{1}{4}$	$-2\frac{3}{8}$	$3\frac{3}{4} \times 1$	54	18
	$16500_{\rm under}^{\rm and} 18000$	$6\frac{1}{4}$	$\frac{43}{4}$	$4\frac{3}{4} \times 4\frac{3}{8}$	$3\frac{1}{4}$	$6\frac{1}{4} \times 3\frac{3}{8}$	$2\frac{3}{8}$	$4 \times 1\frac{1}{8}$	57	19
	18000 and 19700	7	$5\frac{1}{4}$	$5\frac{1}{2} \times 4\frac{5}{8}$	$3\frac{1}{2}$	$7 \times 3\frac{5}{8}$	$2\frac{1}{2}$	$4\frac{1}{2} \times 1\frac{1}{4}$	57	19
	19700 _{under} 21700	$7\frac{1}{4}$	$5\frac{1}{2}$	$6 \times 4\frac{5}{8}$	$3\frac{1}{2}$	$7\frac{1}{4} \times 3\frac{5}{8}$	$2\frac{5}{8}$	$4\frac{1}{2} \times 1\frac{1}{4}$	60	20
	21700 _{under} 24100	$7\frac{3}{4}$	$5\frac{3}{4}$	$6\frac{1}{2} \times 5$	$3\frac{3}{4}$	$7\frac{3}{4} \times 3\frac{7}{8}$	$2\frac{3}{4}$	$4\frac{3}{4} \times 1\frac{1}{4}$	60	20
	24100 _{under} 27000	8	6	$6\frac{1}{2} \times 5\frac{3}{8}$	4	8 ×4	$2\frac{3}{4}$	$5 \times 1\frac{3}{8}$	60	20
	27000 and 30400	$8\frac{1}{2}$	$6\frac{1}{2}$	$6\frac{3}{4} \times 5\frac{5}{8}$	$4\frac{1}{4}$	$8\frac{1}{2} \times 4\frac{1}{4}$	3	$5 \times 1\frac{3}{8}$	63	21
į	30400 and 34300	9	$6\frac{3}{4}$	7 × 6	$\frac{41}{2}$	$9 \times 4\frac{3}{8}$	3	$5\frac{1}{4} \times 1\frac{3}{8}$	63	22
Y	34300 and 38800	$9\frac{1}{2}$	$7\frac{1}{4}$	$7\frac{1}{2} \times 6\frac{3}{8}$	434	$9\frac{1}{2} \times 4\frac{1}{2}$	$3\frac{1}{8}$	$5\frac{1}{4} \times 1\frac{3}{8}$	63	22
	38800 and 43900	10	$7\frac{1}{2}$	$8 \times 6\frac{5}{8}$	5	$10 \times 4\frac{5}{8}$	$3\frac{1}{4}$	$5\frac{1}{2} \times 1\frac{1}{2}$	66	22
	43900 and 49600	$10\frac{1}{2}$	8 .	$8\frac{1}{4} \times 7$	$5\frac{1}{4}$	$10\frac{1}{2} \times 4\frac{3}{4}$	338	$5\frac{1}{2} \times 1\frac{1}{2}$	66	22
	49600 and 56000	$10\frac{1}{2}$	8	$8\frac{1}{4} \times 7$	$5\frac{1}{4}$	$10\frac{1}{2} \times 4\frac{3}{4}$	$3\frac{3}{8}$	$5\frac{1}{2} \times 1\frac{1}{2}$	66	22
	56000 and 63000	11	81/4	$8\frac{1}{2} \times 7\frac{1}{4}$	$5\frac{1}{2}$	11 ×5	$3\frac{1}{2}$	$5\frac{3}{4} \times 1\frac{1}{2}$	66	22
+	63000 and 70000	11	$8\frac{1}{4}$	$8\frac{1}{2} \times 7\frac{1}{4}$	$5\frac{1}{2}$	11 ×5	$3\frac{1}{2}$	$5\frac{3}{4} \times 1\frac{1}{2}$	66	22
				,						

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING, 2, WHITE LION COURT, CORNHILL, LONDON, F. 20th April, 1899.

	AR	MS AT ANI	BETWEEN	N RUDDER PINTL	ES.	
Keyed to Mainpiece.		Forged to	Mainpiece.	Depth and	Maximum	Thickness
Depth and	Thickness	Depth o	f Arms.	Thickness of	Distance	of
Thickness of	of Arm	With Small	With Large	Arms at	between Centres of	Single Plate
Arms at Mainpiece.	round Mainpiece.	Fillet.	Fillet.	Point.	Arms.	in 20ths.
mampiece.	main proce.	(d)	(e)			
inches.	inches.	inches.	inches.	inches.	inches.	
$3 \times 1\frac{1}{2}$	$1\frac{1}{8}$	5	$\frac{4\frac{1}{2}}{}$	$\frac{2\frac{1}{2} \times \frac{3}{4}}{2}$	26	10
$3\frac{1}{2} \times 1\frac{5}{8}$	$1\frac{1}{8}$	5	$4\frac{1}{2}$	$2\frac{1}{2} \times \frac{3}{4}$	26	10
$3\frac{3}{4} \times 1\frac{3}{4}$	$1\frac{1}{4}$	5	$4\frac{1}{2}$	$2\frac{1}{2} \times \frac{3}{4}$	26	10
$4 \times 1\frac{7}{8}$	$1\frac{3}{8}$	$5\frac{1}{2}$	$4\frac{1}{2}$	$2\frac{3}{4} \times \frac{7}{8}$	27	10
$4\frac{1}{4} \times 1\frac{7}{8}$	$1\frac{3}{8}$	$5\frac{1}{2}$	$4\frac{1}{2}$	$2\frac{3}{4} \times \frac{7}{8}$	27	12
$4\frac{1}{2} \times 2$	$1\frac{3}{8}$	$5\frac{1}{2}$	$4\frac{1}{2}$	$2\frac{3}{4} \times \frac{7}{8}$	27	12
$4\frac{1}{2} \times 2$	$1\frac{3}{8}$	$5\frac{1}{2}$	$4\frac{1}{2}$	$2\frac{3}{4} \times \frac{7}{8}$	27	12
$4\frac{3}{4} \times 2\frac{1}{8}$	$1\frac{1}{2}$	$5\frac{1}{2}$	$4\frac{1}{2}$	$2\frac{3}{4} \times \frac{7}{8}$	27	12
$5 \times 2\frac{1}{4}$	$1\frac{1}{2}$	6	5	3 ×1	29	15
$5\frac{1}{4} \times 2\frac{1}{4}$	$1\frac{1}{2}$	6	5	3 ×1	29	15
$5\frac{1}{2} \times 2\frac{1}{4}$	$1\frac{1}{2}$	6	5	3 ×1	29	15
$5\frac{3}{4} \times 2\frac{3}{8}$	$1\frac{5}{8}$	6	5	3×1	29	15
$6 \times 2\frac{3}{8}$	$1\frac{5}{8}$	6	5	$3\frac{1}{4} \times 1\frac{1}{8}$	30	18
$6\frac{1}{2} \times 2\frac{3}{4}$	2	$6\frac{1}{2}$	$5\frac{1}{2}$	$3\frac{1}{2} \times 1\frac{1}{4}$	32	18
$6\frac{1}{2} \times 2\frac{3}{4}$	2	$6\frac{1}{2}$	$5\frac{1}{2}$	$3\frac{1}{2} \times 1\frac{1}{4}$	32	18
$6\frac{1}{2} \times 3$	$2\frac{1}{8}$	$6\frac{1}{2}$	$5\frac{1}{2}$	$3\frac{1}{2} \times 1\frac{1}{4}$	32	20
$6\frac{1}{2} \times 3\frac{1}{8}$	$2\frac{1}{4}$	$6\frac{1}{2}$	$5\frac{1}{2}$	$3\frac{3}{4} \times 1\frac{3}{8}$	33	20
$6\frac{1}{2} \times 3\frac{1}{4}$	$2\frac{1}{4}$	7	6	$3\frac{3}{4} \times 1\frac{3}{8}$	35	20
$7 \times 3\frac{1}{2}$	$2\frac{1}{2}$	7	6	$3\frac{3}{4} \times 1\frac{3}{8}$	35	22
$7 \times 3\frac{7}{8}$	$2\frac{3}{4}$	7	6	$3\frac{3}{4} \times 1\frac{3}{8}$	35	22
$7 \times 4\frac{1}{8}$	$2\frac{7}{8}$	7	6	$4 \times 1\frac{1}{2}$	36	22
$7 \times 4\frac{1}{4}$	3	7	6	$4 \times 1\frac{1}{2}$	36	22
$7 \times 4\frac{1}{4}$	3	7	6	$4 \times 1\frac{1}{2}$	36	22
$7\frac{1}{2} \times 4\frac{3}{8}$	$3\frac{1}{8}$	$7\frac{1}{2}$	$6\frac{1}{2}$	$4 \times 1\frac{1}{2}$	38	22
$7\frac{1}{2} \times 4\frac{3}{8}$	$3\frac{1}{8}$	$7\frac{1}{2}$	$6\frac{1}{2}$	$4 \times 1\frac{1}{2}$	38	22
		1				

* In Sailing Vessels the diameter of the rudder heads required by Table S 3 to regulate the scantlings for single plate rudders and these scantlings to be in accordance with Table S 3A requirements for rudder heads of the same diameter.

(a) The diameter of the rudder heads for Steam Vessels to be calculated by the following formula, but in no case is the diameter to be less than that given in this Table.

 $d=\frac{1}{32}\sqrt[3]{D\times b(2B-b)\times S^2}$ where d=diameter of rudderhead in inches, D=feet draught, B=the greatest distance in inches from the centre of pintles to back of rudder, and b=the greatest breadth of the rudder in inches, and S=speed in knots.

- (b) The figures in this column to be the fore and aft dimensions.
- (e) The figures in this column to be the athwartship dimensions.
- (a) Fillets to arms forged or cast on the mainpiece not to have a less radius than one-fifth of the distance between the arms.
- (d) & (e) A vertical groove in depth equal to the thickness of the plate, but not to exceed one inch, to be formed in the mainpiece to receive the fore edge of the plate, except in those cases where the arm fillets have a radius equal to half the distance between the arms, when the groove may be dispensed with.

orms otices &c:

TABLE OF MINIMUM SIZES OF STEERING CHAINS, RODS,

	1	1	THE REAL PROPERTY AND ADDRESS OF	1				1171110,	lobo,
Diameter		Diameter		BOSS O	F QUADRAN	FORG	ED IRON QUA	DRANTS AND	TILLE
of Rudder		of Chains.	of Rods.	-			Sizes of	Arms at tw	o Diam
Head.	Quadrant.	(a)	(a)	Depth.	Outside Diamete:		TWO ARM	IS. THREE	
inches.	feet. inches	3/8	inches. $\frac{1}{2}$	inches.	inches. $5\frac{1}{2}$	inches. inche $3\frac{1}{4} \times 2$	es. inches. inch	es. inches. inc	ches. inch
$\frac{3\frac{1}{4}}{2}$	3 0	3 8	1/2	$3\frac{1}{4}$	$5\frac{3}{4}$	$3\frac{1}{4} \times 2\frac{1}{4}$			
$\frac{3\frac{1}{2}}{2}$	3 2	7 16	9 16	$3\frac{1}{2}$	$6\frac{1}{4}$	$3\frac{1}{2} \times 2\frac{1}{2}$	-		
$\frac{3\frac{3}{4}}{}$	3 2	7 16	9 16	$3\frac{3}{4}$	$6\frac{3}{4}$	$4 \times 2\frac{1}{2}$	-		
4	3 4	$\frac{1}{2}$	5/8	4	$7\frac{1}{4}$	$\frac{4\frac{1}{4} \times 2\frac{1}{2}}{}$			
41/4	3 4	9 16	$\frac{11}{16}$	$4\frac{1}{4}$	7^{1}_{2}	$4\frac{1}{2} imes 2\frac{3}{4}$			
$\frac{4\frac{1}{2}}{}$	3 6	$\frac{9}{16}$	$\frac{11}{16}$	$4\frac{1}{2}$	8	$5 \times 2\frac{3}{4}$			
$-4\frac{3}{4}$	3 6	$\frac{5}{8}$	$\frac{13}{16}$	$\frac{4^{3}}{4}$	$8\frac{1}{2}$	$5\frac{1}{4} \times 2\frac{3}{4}$			
5	3 8	5/8	13 16	5	9	$5\frac{1}{2} \times 3$			
$5\frac{1}{4}$	3 8	$\frac{11}{16}$	$\frac{14}{16}$	$5\frac{1}{4}$	$9\frac{1}{4}$	$5\frac{3}{4}\times3$			
$\frac{5\frac{1}{2}}{2}$	3 10	$\frac{3}{4}$	$\frac{15}{16}$	$5\frac{1}{2}$	$9\frac{3}{4}$	$6 \times 3\frac{1}{4}$			
$5\frac{3}{4}$	3 10	$\frac{3}{4}$	$\frac{15}{16}$	$5\frac{3}{4}$	101		$\frac{1}{5 \times 2\frac{1}{2}}$		-
6	4 0	13	1	6	$10\frac{3}{4}$	$6\frac{1}{2} \times 3\frac{1}{2}$			_
$6\frac{1}{4}$	4 0	$\frac{7}{8}$	$1\frac{1}{16}$	$6\frac{1}{4}$	$11\frac{1}{4}$				
$6\frac{1}{2}$	4 2	$\frac{7}{8}$	$1\frac{1}{16}$	$6\frac{1}{2}$	$11\frac{3}{4}$		_ 1		
$\frac{6\frac{3}{4}}{2}$	4 2	$\frac{15}{16}$	$1_{\frac{3}{16}}$	$6\frac{3}{4}$	12	$7\frac{1}{4} \times 3\frac{3}{4}$			
7	4 4	1	11/4	7	$12\frac{1}{2}$		$\frac{1}{6 \times 3\frac{1}{4}}$		
$7\frac{1}{4}$	4 4	1	$1\frac{1}{4}$.	$7\frac{1}{4}$	13	$7\frac{3}{4} \times 4\frac{1}{4}$	-		
$7\frac{1}{2}$	4 6	$1\frac{1}{16}$	$1\frac{5}{16}$	$7\frac{1}{2}$	$13\frac{1}{2}$	$8 \times 4\frac{1}{2}$			
$7\frac{3}{4}$	4 6	$1\frac{1}{8}$	$1\frac{3}{8}$	$7\frac{3}{4}$	14		$\frac{6\frac{1}{4} \times 3\frac{3}{4}}{6\frac{1}{4} \times 3\frac{3}{4}}$		_
8	4 8	$1\frac{1}{8}$	$1\frac{3}{8}$	8	$14\frac{1}{2}$		$6\frac{1}{2} \times 4$	$5\frac{3}{4} \times 3\frac{1}{2}$	
$8\frac{1}{2}$	5 0	$1\frac{3}{16}$	$1\frac{1}{2}$	$8\frac{1}{2}$	$15\frac{1}{4}$	The state of the s			
9	5 4	$\frac{1_{\frac{1}{4}}}{}$		9	$16\frac{1}{4}$	$9\frac{1}{2} \times 5\frac{1}{4}$	$7\frac{1}{2} \times 4\frac{1}{4}$		
$\frac{9\frac{1}{2}}{10}$	5 8	$\frac{1\frac{3}{8}}{}$	$1\frac{1}{1}\frac{1}{6}$	$9\frac{1}{2}$	17	$10 \times 5\frac{3}{4}$	$8 \times 4\frac{1}{2}$		
10	6 0	$1\frac{7}{16}$	_	10	18	$10\frac{1}{2} \times 6$	$8\frac{1}{2} \times 4\frac{1}{2}$		7 >
$\frac{10\frac{1}{2}}{11}$	6 4	$\frac{1_{\frac{1}{2}}}{1_{\frac{1}{2}}}$		$10\frac{1}{2}$	19	$11 \times 6\frac{1}{4}$	$9 \times 4\frac{3}{4}$		$7\frac{1}{2}$
11	6 8	$\frac{1\frac{9}{16}}{}$		11	$19\frac{3}{4}$	$11\frac{1}{2} \times 6\frac{3}{4}$	$9\frac{1}{2} \times 5$	$8\frac{1}{4} \times 4\frac{1}{2}$	
$\frac{11\frac{1}{2}}{1}$	7 4	$\frac{1\frac{5}{8}}{}$		$11\frac{1}{2}$	$20\frac{3}{4}$	12 ×7	$10 \times 5\frac{1}{4}$	$8\frac{1}{2} \times 5$	8 ×
12	8 0	$\frac{1\frac{5}{8}}{}$		12	$21\frac{1}{2}$	$12\frac{1}{2} \times 7\frac{1}{2}$	$10\frac{1}{2} \times 5\frac{1}{2}$	9 × 5	$\frac{8_1}{8_2} \times$
3	8 0		- []	13	$23\frac{1}{2}$		$11\frac{1}{4} \times 5\frac{3}{4}$	10 ×5	9 >
4	8 0		- 1	14	$25\frac{1}{4}$	-		$\frac{10\frac{1}{2} \times 5\frac{1}{4}}{10\frac{1}{2} \times 5\frac{1}{4}}$	$\frac{9_{\frac{1}{2}}}{}$
5	8 0	_	- 1	5	27	_	-	$\frac{10\frac{2}{2}\times 5\frac{4}{4}}{11\times 5\frac{1}{2}}$	$\frac{\sigma_2}{10}$

TABLE S 3B.

C	ST STEEL	QUADRANT TILLE	TRS.
		of Rudder head.	
TWO ARM	IS.	TWO ARMS.	THREE ARMS.
Γ,			
1		1	7
Î,D	TIT		TT
T D	- 4 -		
	*		B→
	i ·		
es. inches.	D inches.	B T inches.	B I inches.
		$6 \times 1\frac{1}{4}$	
		$6\frac{1}{4} \times 1\frac{1}{4}$	
		$6\frac{1}{2} \times 1\frac{3}{8}$	
		$6\frac{3}{4} \times 1\frac{3}{8}$	
		$7 \times 1\frac{5}{8}$	
		$7\frac{1}{4} imes 1\frac{5}{8}$	
		$7\frac{1}{2} \times 1\frac{3}{4}$	
		$7\frac{3}{4} \times 1\frac{3}{4}$	*
$ imes 1rac{3}{8}$	2	$8 \times 1\frac{3}{4}$	
$3\frac{1}{4} \times 1\frac{1}{2}$	2	$8\frac{1}{4} \times 1\frac{7}{8}$	
$\frac{1}{2} \times 1\frac{1}{2}$	2	$8\frac{1}{2} \times 1\frac{7}{8}$	
$\frac{3}{4} \times 1\frac{5}{8}$	2	$8\frac{3}{4} \times 2$	
$\times 1\frac{5}{8}$	$2\frac{1}{4}$	9 ×2	$8 \times 1\frac{3}{4}$
$\frac{1}{2} \times 1\frac{3}{4}$	$2\frac{1}{4}$	$9\frac{1}{2} \times 2\frac{1}{4}$	$8\frac{1}{2} \times 1\frac{7}{8}$
$\times 1\frac{7}{8}$	$2\frac{1}{2}$	$10 \times 2\frac{3}{8}$	$9 \times 1\frac{7}{8}$
$\frac{1}{2} \times 2$	$2\frac{1}{2}$	$10\frac{1}{2} \times 2\frac{1}{2}$	$9\frac{1}{2} \times 2$
$\times 2\frac{1}{8}$	$2\frac{3}{4}$	$11 \times 2\frac{5}{8}$	$10 \times 2\frac{1}{8}$
$\frac{1}{2} \times 2\frac{1}{4}$	$2\frac{3}{4}$	$11\frac{1}{2} \times 2\frac{3}{4}$	$10\frac{1}{2} \times 2\frac{1}{4}$
$2\times2\frac{3}{8}$	3	12 ×3	$11 \times 2\frac{3}{8}$
$2\frac{1}{2} \times 2\frac{1}{2}$	3	$12\frac{1}{2} \times 3\frac{1}{8}$	$11\frac{1}{2} \times 2\frac{1}{2}$
$3 imes 2\frac{5}{8}$	$3\frac{1}{4}$	$13 \times 3\frac{1}{4}$	$12 \times 2\frac{5}{8}$
$4 \times 2\frac{3}{4}$	$3\frac{1}{2}$	$14 \times 3\frac{1}{2}$	$13 \times 2\frac{3}{4}$
5 × 3	$3\frac{3}{4}$	$15 \times 3\frac{3}{4}$	14 ×3
$3 \times 3\frac{1}{4}$	4	16 ×4	$15 \times 3\frac{1}{4}$
the same of the sa			

(a) Where the radius of quadrant or length of tiller adopted, differs from that given in the Table, the diameter of steering chain is to be calculated from the following formula:—

$$d=38\sqrt{\frac{D^3}{R}};$$

where d=diameter of chain in inches;

D=diameter of rudder head in inches according to Table for rudder heads.

R=radius of quadrant or length of tiller at centre of the chain in inches.

The steering rods to be one-fourth larger in diameter than the chain, or of the corresponding diameter given in the Table for the chain required.

(b) The sizes of arms at ends may be reduced to three-fourths of the dimensions given in the Table, and where a quadrant tiller is not keyed to the rudder head, the arms of the same may be of these reduced dimensions throughout their lengths.

The diameters at the centre of the chain of leading block sheaves are not to be less than sixteen times that of the steering chains and the pins of the sheaves are to be not less than twice the diameter of the chains.

LLOYD'S REGISTER OF BRITISH

AND FOREIGN SHIPPING,

2, White Lion Court, Cornhill, London, E.C.

26th April, 1900.

orms otices

.

orms otices. hoard

Length of Beam amidships.	STEAMERS WOLLY, AND	BEAMS AMIDSI VITH ONE 'TIEN IN ALL SAILIN Cends see Footnot	R OF BEAMS	AMIDSHIPS MORE THA	(b) IN STEAD N ONE TIER	OF BEAMS.	MAIN, MIDDLE, LOWER AND ORLOP DECK BEAMS AMIDSHIPS (C) IN STEAMERS. (For Beams at ends see Footnote, Table S 4 A.)			
Leam	With one row of Pillars.	With two rows of Pillars.	3 With three rows of Pillars.	1 With one row of Pillars.	With two rows of Pillars.	Withthreerows of Pillars.	1 With one row of Pillars.	With two rows of Pillars.	3 With three rows of Pillars.	
Feet.	Single Angles. ins. ins. $4\frac{1}{2} \times 3 \times \frac{6}{20}$	Single Angles. ins. ins. $4\frac{1}{2} \times 3 \times \frac{6}{20}$	Single Angles. ins. ins. $4 \times 3 \times \frac{6}{20}$	Bulb Plate. ins. ins.	Bulb Plate. ins. ins.	Bulb Plate. ins. ins.	Bulb Plate. ins. ins.	Bulb Plate. ins. ins.	Bulb Plate. ins. ins.	
18	$5 \times 3 \times \frac{7}{20}$	$5 \times 3 \times \frac{7}{20}$	$4\frac{1}{2} \times 3 \times \frac{7}{20}$							
20	$5\frac{1}{2} \times 3 \times \frac{8}{20}$	$5\frac{1}{2} \times 3 \times \frac{8}{20}$	$5 \times 3 \times \frac{8}{20}$						•	
22	$6 \times 3 \times \frac{9}{20}$	$6 \times 3 \times \frac{8}{20}$	$5\frac{1}{2} \times 3 \times \frac{8}{20}$						-	
24	Bulb Plate. $6 \times \frac{6}{20}$	$6\frac{1}{2} \times 3 \times \frac{9}{20}$	$6 \times 3 \times \frac{9}{20}$	$6 \times \frac{6}{20}$	$5\frac{1}{2} imes rac{5}{20}$	$5 \times \frac{5}{20}$	$7 \times \frac{6}{20}$	$6 \times \frac{6}{20}$	$5\frac{1}{2} \times \frac{5}{20}$	
26	$6\frac{1}{2} \times \frac{6}{20}$	$6 \times \frac{6}{20}$	$6\frac{1}{2} \times 3 \times \frac{9}{20}$	$6\frac{1}{2} \times \frac{6}{20}$	$6 \times \frac{5}{20}$	$5 \times \frac{5}{20}$	$7 \times \frac{7}{20}$	$6\frac{1}{2} \times \frac{6}{20}$	$5\frac{1}{2} \times \frac{5}{20}$	
28	$7 \times \frac{6}{20}$	$7 \times \frac{6}{20}$	Bulb Plate. $6\frac{1}{2} \times \frac{6}{20}$	$7 \times \frac{6}{20}$	$6 \times \frac{6}{20}$	$5\frac{1}{2} imes rac{5}{20}$	$7\frac{1}{2} \times \frac{8}{20}$	$7 \times \frac{6}{20}$	$5\frac{1}{2} \times \frac{6}{20}$	
30	$7\frac{1}{2} \times \frac{7}{20}$	$7 \times \frac{7}{20}$	$7 \times \frac{6}{20}$	$7 \times \frac{7}{20}$	$6\frac{1}{2} \times \frac{6}{20}$	$5\frac{1}{2} \times \frac{5}{20}$	$8 \times \frac{.8}{20}$	$7 \times \frac{7}{20}$	$6 \times \frac{6}{20}$	
32	$8 \times \frac{8}{20}$	$7\frac{1}{2} \times \frac{7}{20}$	$7 \times \frac{7}{20}$	$7\frac{1}{2} \times \frac{8}{20}$	$7 \times \frac{6}{20}$	$5\frac{1}{2} imes \frac{6}{20}$	$8\frac{1}{2} \times \frac{9}{20}$	$7\frac{1}{2} imes \frac{7}{20}$	$6\frac{1}{2} \times \frac{6}{20}$	
34	$8\frac{1}{2} \times \frac{8}{20}$	$8 \times \frac{7}{20}$	$7\frac{1}{2} \times \frac{7}{20}$	$8 \times \frac{8}{20}$	$7 \times \frac{7}{20}$	$6 \times \frac{6}{20}$	$9 \times \frac{9}{20}$	$8 \times \frac{8}{20}$	$7 \times \frac{6}{20}$	
36	$9\times \frac{9}{20}$	$8\frac{1}{2} \times \frac{8}{20}$	$8 \times \frac{8}{20}$	$8\frac{1}{2} \times \frac{9}{20}$	$7\frac{1}{2} \times \frac{7}{20}$	$6\frac{1}{2} \times \frac{6}{20}$	$9\frac{1}{2} \times \frac{9}{20}$	$8\frac{1}{2} \times \frac{8}{20}$	$7 \times \frac{7}{20}$	
38	$9\frac{1}{2} \times \frac{9}{20}$	$9 \times \frac{8}{20}$	$8\frac{1}{2} \times \frac{8}{20}$	$9 \times \frac{9}{20}$	$8 \times \frac{8}{20}$	$7 \times \frac{6}{20}$	$10 \times \frac{10}{20}$	$8\frac{1}{2} \times \frac{9}{20}$	$7\frac{1}{2} \times \frac{7}{20}$	
40	$10 \times \frac{10}{20}$	$9\frac{1}{2} \times \frac{9}{20}$	$9 \times \frac{8}{20}$	$9\frac{1}{2} \times \frac{10}{20}$	$8\frac{1}{2} \times \frac{8}{20}$	$7 \times \frac{7}{20}$	$10^{\frac{1}{2}} \times \frac{10}{20}$	$9 \times \frac{9}{20}$	$8 \times \frac{8}{20}$	
42	$10\frac{1}{2} imes \frac{10}{20}$	$10 \times \frac{9}{20}$	$9 \times \frac{9}{20}$	$10 \times \frac{10}{20}$	$8\frac{1}{2} \times \frac{9}{20}$	$7\frac{1}{2} \times \frac{7}{20}$	$11 \times \frac{1}{20}$	$9\frac{1}{2} \times \frac{10}{20}$	$8\frac{1}{2} \times \frac{8}{20}$	
44		$10_{\frac{1}{2}} \times \frac{10}{20}$	$10 \times \frac{9}{20}$		$9 \times \frac{9}{20}$	$8 \times \frac{8}{20}$		$10 \times \frac{10}{20}$	$9 \times \frac{8}{20}$	
46		$11 \times \frac{10}{20}$	$10 \times \frac{10}{20}$		$9_{\frac{1}{2}} \times \frac{10}{20}$	$8\frac{1}{2} \times \frac{8}{20}$		$10^{\frac{1}{2}} \times \frac{10}{20}$	$9 \times \frac{9}{20}$	
48		$11_{\frac{1}{2}} \times \frac{1}{2} \frac{1}{0}$	$10^{\frac{1}{2}} \times \frac{11}{20}$		$10 \times \frac{10}{20}$	$9 \times \frac{8}{20}$		$11 \times \frac{10}{20}$	$9\frac{1}{2} \times \frac{9}{20}$	
50			$11 \times \frac{11}{20}$		$10_{\frac{1}{2}} \times \frac{10}{20}$	$9 \times \frac{9}{20}$		$11 \times \frac{11}{20}$	$10 \times \frac{9}{20}$	
52					$11 \times \frac{10}{20}$	$9\frac{1}{2} \times \frac{9}{20}$		$11_{\frac{1}{2}} \times \frac{1}{2} \frac{1}{0}$	$10 \times \frac{10}{20}$	
54		,			$11 \times \frac{11}{20}$	$10 \times \frac{9}{20}$		$12 \times \frac{11}{20}$	$10^{\frac{1}{2}} \times \frac{10}{20}$	
56						$10 \times \frac{10}{20}$			$11 \times \frac{10}{20}$	
58						$10^{\frac{1}{2}} \times \frac{10}{20}$			$11 \times \frac{11}{20}$	
60					-	$11 \times \frac{10}{20}$			$11\frac{1}{2} \times \frac{1}{2}\frac{1}{0}$	
62						$\frac{11}{11} \times \frac{11}{20}$			$\frac{12 \times \frac{11}{20}}{100}$	
64						$11\frac{1}{2} \times \frac{11}{20}$			$12 \times \frac{12}{20}$	
	For sizes o	f angles fit	ted to bulk	plates a	nd for equ	uivalent b	eams see	Table S 4	Α.	

LLOYD'S REGISTER OF SHIPPING, 2, WHITE LION COURT, CORNHILL, LONDON, E.C.—26th April, 1900.

TABLE S 4.

								-
DECKS AND ONE-TENTH T	AWNING AND BRIDGE DECKS THE VESSEL'S LI	EXCEEDING ENGTH (#.)	ONE-TENTH T	BRIDGE DECKS THE VESSEL'S L POOP DECKS.	ENGTH, AND	HOLD BEAMS	Length of Beam amidships.	
Vith one row of Pillars.	With two rows of Pillars.	With three rows of Pillars.	With one row of Pillars.	With two rows of Pillars.	With three rows of Pillars.			I a;
ingle Angles. ns. ins. ins.	Single Angles. ins. ins. ins.	Single Angles. ins. ins.	Single Angles. ins. ins. ins.	Single Angles. ins. ins. ins.	Single Angles. ins. ins. ins.	Plate or Bulb Plate ins. ins.	Angles. ins. ins. ins.	Feet.
								18
$\frac{1}{2} \times 3 \times \frac{7}{20}$	$\overline{4_{\frac{1}{2}} \times 3 \times \frac{7}{20}}$	$4 \times 3 \times \frac{7}{20}$						20
$\times 3 \times \frac{7}{20}$	$4\frac{1}{2} \times 3 \times \frac{7}{20}$	$4 \times 3 \times \frac{7}{20}$	$\overline{4_{\frac{1}{2}} \times 3 \times \frac{6}{20}}$	$\overline{4_{\frac{1}{2}} \times 3 \times \frac{6}{20}}$	$4 \times 3 \times \frac{6}{20}$			22
$\frac{1}{2} \times 3 \times \frac{8}{20}$	$5 \times 3 \times \frac{7}{20}$	$4\frac{1}{2} \times 3 \times \frac{7}{20}$	$4\frac{1}{2} \times 3 \times \frac{7}{20}$	$4\frac{1}{2} \times 3 \times \frac{7}{20}$	$4 \times 3 \times \frac{7}{20}$	$7 \times \frac{7}{20}$	$3 \times 3 \times \frac{6}{20}$	24
$\times 3 \times \frac{9}{20}$	$5\frac{1}{2} \times 3 \times \frac{8}{20}$	$5 \times 3 \times \frac{7}{20}$	$5 \times 3 \times \frac{7}{20}$	$4\frac{1}{2} \times 3 \times \frac{7}{20}$	$4 \times 3 \times \frac{7}{20}$	$7\frac{1}{2} \times \frac{7}{20}$	$3 \times 3 \times \frac{7}{20}$	26
$6 \times \frac{6}{20}$	$6 \times 3 \times \frac{8}{20}$	$5\frac{1}{2} \times 3 \times \frac{7}{20}$	$5\frac{1}{2} \times 3 \times \frac{7}{20}$	$5 \times 3 \times \frac{7}{20}$	$4\frac{1}{2} \times 3 \times \frac{7}{20}$	$8 \times \frac{8}{20}$	$3\frac{1}{2} \times 3 \times \frac{7}{20}$	28
$6\frac{1}{2} \times \frac{6}{20}$	$\overline{6_{\frac{1}{2}} \times 3 \times \frac{8}{20}}$	$\overline{5\frac{1}{2} \times 3 \times \frac{8}{20}}$	$\overline{5_{\frac{1}{2}} \times 3 \times \frac{8}{20}}$	$5\frac{1}{2} \times 3 \times \frac{7}{20}$	$4\frac{1}{2} \times 3 \times \frac{7}{20}$	$8\frac{1}{2} \times \frac{8}{20}$	$4 \times 3 \times \frac{7}{20}$	30
$7 \times \frac{6}{20}$	$6 \times \frac{6}{20}$	$6 \times 3 \times \frac{8}{20}$	$6 \times 3 \times \frac{9}{20}$	$5\frac{1}{2} \times 3 \times \frac{8}{20}$	$5 \times 3 \times \frac{7}{20}$	$9 \times \frac{9}{20}$	$4 \times 3\frac{1}{2} \times \frac{7}{20}$	32
$7 \times \frac{7}{20}$	$6\frac{1}{2} \times \frac{6}{20}$	$6 \times 3 \times \frac{9}{20}$	$6 \times \frac{6}{20}$	$6 \times 3 \times \frac{8}{20}$	$5\frac{1}{2} \times 3 \times \frac{7}{20}$	$9\frac{1}{2} \times \frac{9}{20}$	$4 \times 4 \times \frac{8}{20}$	34
$7\frac{1}{2} \times \frac{7}{20}$	$7 \times \frac{6}{20}$	$6\frac{1}{2} \times 3 \times \frac{9}{20}$	$6\frac{1}{2} \times \frac{6}{20}$	$\overline{6_{\frac{1}{2}} \times 3 \times \frac{8}{20}}$	$5\frac{1}{2} \times 3 \times \frac{8}{20}$	$10 \times \frac{10}{20}$	$4 \times 4 \times \frac{9}{20}$	36
$8 \times \frac{8}{20}$	$7 \times \frac{7}{20}$	$6 \times \frac{6}{20}$	$7 \times \frac{7}{20}$	Bulb Plate. $6\frac{1}{2} \times \frac{6}{20}$	$6 \times 3 \times \frac{9}{20}$	$10\frac{1}{2} \times \frac{10}{20}$	$4\frac{1}{2} \times 4 \times \frac{9}{20}$	38
$8\frac{1}{2} \times \frac{8}{20}$	$7\frac{1}{2} \times \frac{7}{20}$	$6\frac{1}{2} \times \frac{6}{20}$	$7\frac{1}{2} \times \frac{7}{20}$	$7 \times \frac{6}{20}$		$11 \times \frac{1}{20}$	$4\frac{1}{2} \times 4 \times \frac{9}{20}$	40
$9 \times \frac{9}{20}$	$8 \times \frac{8}{20}$	$7 \times \frac{6}{20}$	$8 \times \frac{8}{20}$	$7 \times \frac{7}{20}$	$6 \times \frac{6}{20}$	$11\frac{1}{2} \times \frac{1}{20}$	$5 \times 4 \times \frac{9}{20}$	42
	$8\frac{1}{2} \times \frac{8}{20}$	$7 \times \frac{7}{20}$		$7\frac{1}{2} \times \frac{7}{20}$	$6\frac{1}{2} \times \frac{6}{20}$	$12 \times \frac{11}{20}$	$5\frac{1}{2} \times 4 \times \frac{9}{20}$	44
	$8\frac{1}{2} \times \frac{9}{20}$	$7\frac{1}{2} \times \frac{7}{20}$		$8 \times \frac{8}{20}$	$7 \times \frac{6}{20}$	$12 \times \frac{11}{20}$	$6 \times 4 \times \frac{9}{20}$	46
	$9 \times \frac{9}{20}$	$8 \times \frac{8}{20}$		$8\frac{1}{2} \times \frac{8}{20}$	$7 \times \frac{7}{20}$	$13 \times \frac{11}{20}$	$6 \times 4 \times \frac{9}{20}$	48
	$9\frac{1}{2} \times \frac{9}{20}$	$8\frac{1}{2} \times \frac{8}{20}$		$8\frac{1}{2} \times \frac{9}{20}$	$7\frac{1}{2} \times \frac{7}{20}$	$13 \times \frac{12}{20}$	$6 \times 4 \times \frac{9}{20}$	50
	$10 \times \frac{10}{20}$	$8\frac{1}{2} \times \frac{9}{20}$		$9 \times \frac{9}{20}$	$8 \times \frac{8}{20}$	$13 \times \frac{12}{20}$	$6 \times 4 \times \frac{10}{20}$	52
	$10^{\frac{1}{2}} \times \frac{10}{20}$	$9 \times \frac{9}{20}$		$9\frac{1}{2} \times \frac{9}{20}$	$8\frac{1}{2} \times \frac{8}{20}$	$13 \times \frac{12}{20}$	$6\frac{1}{2} \times 4\frac{1}{2} \times \frac{10}{20}$	54
		$9_{\frac{1}{2}} \times \frac{9}{20}$			$8\frac{1}{2} \times \frac{9}{20}$	$13 \times \frac{12}{20}$	$6\frac{1}{2} \times 4\frac{1}{2} \times \frac{11}{20}$	56
		$10 \times \frac{9}{20}$			$9 \times \frac{9}{20}$	$14 \times \frac{12}{20}$	$6\frac{1}{2} \times 4\frac{1}{2} \times \frac{11}{20}$	58
		$10 \times \frac{10}{20}$			$9\frac{1}{2} \times \frac{9}{20}$	$14 \times \frac{13}{20}$	$6\frac{1}{2} \times 4\frac{1}{2} \times \frac{1}{2}\frac{1}{0}$	60
		$10^{\frac{1}{2}} \times \frac{10}{20}$			$10 \times \frac{9}{20}$	$14 \times \frac{13}{20}$	$6\frac{1}{2} \times 4\frac{1}{2} \times \frac{12}{20}$	62
		$11 \times \frac{10}{20}$			$10 \times \frac{10}{20}$	$15 \times \frac{13}{20}$	$6\frac{1}{2} \times 4\frac{1}{2} \times \frac{1}{2}\frac{2}{0}$	64
				THE RESERVE AND ADDRESS OF THE PARTY OF THE	77	0		THE REAL PROPERTY.

For footnotes see Table S 4A.

BEAMS FITTED TO ALTERNATE FRAMES. BEAMS FITTED TO EVERY FRAMES													
	BEAN	MS FITTED TO AL	TERNATE FRAMES.		BEAMS FITTED	TO EVERY FRAME.							
	T	I]	77	77								
Bulb Plate.	Double Angles. ins. ins. ins.	Butterley Beams. ins. ins. ins.	channel Beams. ins. ins. ins. ins.	Single Angles.	Single Angles. ins. ins. ins.	Channel Beams. ins. ins. ins. ins.							
		$5 \times 4 \times \frac{5}{20}$	$3\frac{1}{2} \times 3 \times 3 \times \frac{6}{20}$										
$5 \times \frac{5}{20}$	$2 \times 2 \times \frac{5}{20}$	$5 \times 4 \times \frac{6}{20}$	$4 \times 3 \times 3 \times \frac{6}{20}$	$5\frac{1}{2} \times 3 \times \frac{8}{20}$	$4 \times 2\frac{1}{2} \times \frac{6}{20}$								
$5\frac{1}{2} imes rac{5}{20}$	$2\frac{1}{2} \times 2\frac{1}{4} \times \frac{5}{20}$	$5 \times 4 \times \frac{7}{20}$	$4\frac{1}{2} \times 3 \times 3 \times \frac{7}{20}$	$6 \times 3 \times \frac{9}{20}$	$4 \times 2\frac{1}{2} \times \frac{6}{20}$								
$5\frac{1}{2} imes rac{6}{20}$	$2\frac{1}{2} \times 2\frac{1}{2} \times \frac{5}{20}$	$6 \times 4\frac{1}{2} \times \frac{6}{20}$	$5 \times 3 \times 3 \times \frac{7}{20}$	$6\frac{1}{2} \times 3 \times \frac{9}{20}$	$4\frac{1}{2} \times 3 \times \frac{6}{20}$								
$6 \times \frac{6}{20}$	$2\frac{1}{2} \times 2\frac{1}{2} \times \frac{5}{20}$	$6 \times 4\frac{1}{2} \times \frac{7}{20}$	$5 \times 3\frac{1}{2} \times 3\frac{1}{2} \times \frac{7}{20}$	$6\frac{1}{2} \times 3 \times \frac{8}{20}$	$5 \times 3 \times \frac{6}{20}$								
$6 \times \frac{7}{20}$	$2\frac{1}{2} \times 2\frac{1}{2} \times \frac{6}{20}$	$6 \times 4\frac{1}{2} \times \frac{8}{20}$	$5 \times 3\frac{1}{2} \times 3\frac{1}{2} \times \frac{8}{20}$	$6\frac{1}{2} \times 3 \times \frac{9}{20}$	$5 \times 3 \times \frac{7}{20}$								
$6\frac{1}{2} \times \frac{6}{20}$	$2\frac{1}{2} \times 2\frac{1}{2} \times \frac{6}{20}$	$6 \times 4\frac{1}{2} \times \frac{8}{20}$	$5\frac{1}{2} \times 3\frac{1}{2} \times 3\frac{1}{2} \times \frac{8}{20}$	$7 \times 3 \times \frac{9}{20}$	$5 \times 3 \times \frac{7}{20}$								
$6\frac{1}{2} \times \frac{7}{20}$	$3 \times 2\frac{1}{2} \times \frac{6}{20}$	$7 \times 5 \times \frac{7}{20}$	$6 \times 3\frac{1}{2} \times 3\frac{1}{2} \times \frac{8}{20}$	$7\frac{1}{2} \times 3 \times \frac{9}{20}$	$5\frac{1}{2} \times 3 \times \frac{7}{20}$	$3\frac{1}{2} \times 3 \times 3 \times \frac{6}{20}$							
$7 \times \frac{6}{20}$	$3 \times 2\frac{1}{2} \times \frac{6}{20}$	$7 \times 5 \times \frac{7}{20}$	$6 \times 3\frac{1}{2} \times 3\frac{1}{2} \times \frac{8}{20}$	$7\frac{1}{2} \times 3 \times \frac{9}{20}$	$5\frac{1}{2} \times 3 \times \frac{7}{20}$	$3\frac{1}{2} \times 3 \times 3 \times \frac{6}{20}$							
$7 \times \frac{7}{20}$	$3 \times 3 \times \frac{6}{20}$	$7 \times 5 \times \frac{8}{20}$	$6 \times 3\frac{1}{2} \times 3\frac{1}{2} \times \frac{9}{20}$	$7\frac{1}{2} \times 3 \times \frac{10}{20}$	$5\frac{1}{2} \times 3 \times \frac{8}{20}$	$4 \times 3 \times 3 \times \frac{6}{20}$							
$7\frac{1}{2} \times \frac{7}{20}$	$3 \times 3 \times \frac{6}{20}$	$7 \times 5 \times \frac{9}{20}$	$6_{\frac{1}{2}} \times 3_{\frac{1}{2}} \times 3_{\frac{1}{2}} \times \frac{9}{20}$	$8 \times 3 \times \frac{10}{20}$	$6 \times 3 \times \frac{8}{20}$	$4 \times 3 \times 3 \times \frac{7}{20}$							
$7\frac{1}{2} \times \frac{8}{20}$	$3 \times 3 \times \frac{6}{20}$	$8 \times 5 \times \frac{8}{20}$	$7 \times 3\frac{1}{2} \times 3\frac{1}{2} \times \frac{9}{20}$	$8 \times 3\frac{1}{2} \times \frac{10}{20}$	$5 \times 3 \times \frac{8}{20}$	$4 \times 3 \times 3 \times \frac{7}{20}$							
$8 \times \frac{7}{20}$	$3 \times 3 \times \frac{6}{20}$	$8 \times 5 \times \frac{8}{20}$	$7 \times 3\frac{1}{2} \times 3\frac{1}{2} \times \frac{9}{20}$	$8 \times 3\frac{1}{2} \times \frac{10}{20}$	$5 \times 3 \times \frac{8}{20}$	$4 \times 3 \times 3 \times \frac{7}{20}$							
$8 \times \frac{8}{20}$	$3 \times 3 \times \frac{6}{20}$	$8 \times 5 \times \frac{9}{20}$	$7_{\frac{1}{2}} \times 3_{\frac{1}{2}} \times 3_{\frac{1}{2}} \times \frac{9}{20}$	$8\frac{1}{2} \times 3\frac{1}{2} \times \frac{10}{20}$	$5\frac{1}{2} \times 3^{-} \times \frac{8}{20}$	$4\frac{1}{2} \times 3 \times 3 \times \frac{7}{20}$							
$8\frac{1}{2} \times \frac{8}{20}$	$3 \times 3 \times \frac{7}{20}$	$8\frac{1}{2} \times 5\frac{1}{4} \times \frac{9}{20}$	$8 \times 3\frac{1}{2} \times 3\frac{1}{2} \times \frac{10}{20}$	$9 \times 3\frac{1}{2} \times \frac{11}{20}$	$6 \times 3 \times \frac{8}{20}$	$5 \times 3 \times 3 \times \frac{7}{20}$							

Where one row of pillars is fitted, the beams at the ends of the vessel which are less in length than two-thirds that of the beam amidships, may be of the sizes required by the columns numbered 2 in Table S4; and beams at ends less than half the length of the beam amidships may be of the sizes required by columns 3 in Table S 4.

Where two rows of pillars are fitted amidships, the athwartship distance between the rows is to be about one-third the breadth of the vessel amidships; and the beams at the ends which are less than two-thirds the length of the beam amidships, may be supported by one row of pillars, and be of the sizes required by columns 2, and where the lengths of the beams at the ends are less than half the midship beam length the sizes may be as required by columns 3, if supported by one row of pillars.

Where three rows of pillars are fitted amidships, the athwartship distances between the rows of pillars is to be about one-fourth the breadth of the vessel amidships, and the beams throughout are to be of the sizes required for beams amidships by columns 3; but where the lengths of the beams are less than three-fourths the length of the beam amidships, two rows of pillars may be fitted; and where the beams at the ends are less than half the midship beam length, one row of pillars may be fitted.

c) Lower and orlop deck beams in sailing vessels to be one inch deeper than given in the Table for upper deck beams of the same length.

LLOYD'S REGISTER OF SHIPPING, 2, WHITE LION COURT, CORNHILL, LONDON, E.C.—26th April, 1900.

_		DUAMS DITTUD TO ALTEDNATE TO AMES															-		_	-	_	_		_		-	-	-	-		-	-		
1		BEAMS FITTED TO ALTERNATE FRAMES.																			BE	AMS	FI	TTE	ED T	0 1	EVEF	RY	FRA	ME.				
		I	-				-	I											-					,										
1	Bulb Plate.	Do	uble	Ang	les.	Butt	erle	y B	eam	B.	ins.	Ch	anne	1 B	eam	3.	ina	B ins.	ulb	Ang	les.	*	ins.	Bulk	An ins.	gles	i.	ins.		hann	el E	Beam	s.	
	$8\frac{1}{2} \times \frac{9}{20}$	$3\frac{1}{2}$	× 3)×	$\langle \frac{7}{20} \rangle$	$8\frac{1}{2}$	×	$5\frac{1}{4}$	X	1 0		×	$3\frac{1}{2}$	×	$3\frac{1}{2}$	×			×	$3\frac{1}{2}$										3	×	3	X	8 2 0
	$9 \times \frac{8}{20}$	$3\frac{1}{2}$	× 3	>	$\langle \frac{7}{20} \rangle$	9	×	$5\frac{1}{4}$	×	9 2 0	8	×	$3\frac{1}{2}$	×	$3\frac{1}{2}$	×	$\frac{11}{20}$	9	×	$3\frac{1}{2}$	×	$\frac{12}{20}$	6	×	3	×	9 2 0	5	×	3	×	3	×	8 2 0
	$9 \times \frac{9}{20}$	$3\frac{1}{2}$	$\times 3$	$\frac{1}{2}$ >	$\langle \frac{7}{20} \rangle$	9	×	$5\frac{1}{4}$	×	1020	$8\frac{1}{2}$	X	$3\frac{1}{2}$	X	$3\frac{1}{2}$	×	$\frac{1}{2} \frac{1}{0}$	9	×	$3\frac{1}{2}$	×	$\frac{1}{2}\frac{3}{0}$	$6\frac{1}{2}$	×	3	×	$\frac{9}{20}$	$5\frac{1}{2}$	X	3	×	3	×	8 2 0
	$9\frac{1}{2} \times \frac{9}{20}$	$3\frac{1}{2}$	×3	$\frac{1}{2}$	$\langle \frac{7}{20} \rangle$	9	×	$5\frac{1}{4}$	×	1120	9	×	$3\frac{1}{2}$	X	$3\frac{1}{2}$	X	$\frac{1}{2} \frac{2}{0}$	$9\frac{1}{2}$	×	$3\frac{1}{2}$	×	$\frac{1}{2} \frac{3}{0}$	7	×	3	×	9 2 0	6	×	3	×	3	×	8 2 0
	$9\frac{1}{2} \times \frac{10}{20}$	$3\frac{1}{2}$	×3	$\left \frac{1}{2}\right>$	$\langle \frac{7}{20} \rangle$	10	×	6	×	$\frac{1}{2}\frac{0}{0}$	$9\frac{1}{2}$	X	$3\frac{1}{2}$	×	$3\frac{1}{2}$	×	$\frac{1}{2} \frac{2}{0}$	10	×	$3\frac{1}{2}$	×	$\frac{1}{2}\frac{3}{0}$	$7\frac{1}{2}$	×	3	×	$\frac{9}{20}$	$6\frac{1}{2}$	×	3	×	3	×	8 2 0
	$10 \times \frac{9}{20}$	$3\frac{1}{2}$	× 3	$\frac{1}{2}$	$\langle \frac{7}{20} \rangle$	10	×	6	×	$\frac{1}{2}\frac{0}{0}$	10	×	$3\frac{1}{2}$	X	$3\frac{1}{2}$	X	$\frac{1}{2} \frac{2}{0}$	10	×	$3\frac{1}{2}$	×	$\frac{14}{20}$	$7\frac{1}{2}$	×	3	×	$\frac{9}{20}$	$6\frac{1}{2}$	X	3	×	3	×	8 2 0
	$10 \times \frac{10}{20}$	$3\frac{1}{2}$	×3	$\left \frac{1}{2}\right>$	$\langle \frac{7}{20} \rangle$	10	×	6	×	$\frac{11}{20}$	10	×	$3\frac{1}{2}$	X	$3\frac{1}{2}$	X	$\frac{1}{2}\frac{3}{0}$	$10\frac{1}{2}$	×	$3\frac{1}{2}$	×	$\frac{1}{2}\frac{4}{0}$	$7\frac{1}{2}$	X	3	×	$\frac{1}{2}\frac{0}{0}$	$6\frac{1}{2}$	×	3	×	3	×	$\frac{9}{20}$
	$10^{\frac{1}{2}} \times \frac{10}{20}$	$3\frac{1}{2}$	×3	$\frac{1}{2}$	$\times \frac{8}{20}$	10	×	6	×	$\frac{1}{2}\frac{2}{0}$	$10\frac{1}{2}$	X	31	X	$3\frac{1}{2}$	X	$\frac{1}{2}\frac{3}{0}$	11	×	$3\frac{1}{2}$	×	$\frac{14}{20}$	8	×	3	×	$\frac{10}{20}$	7	×	3	×	3	×	$\frac{9}{20}$
	$10^{\frac{1}{2}} \times \frac{1}{2}^{\frac{1}{0}}$	$3\frac{1}{2}$	×3	$\frac{1}{2}$	$\times \frac{8}{20}$	11	×	6	×	$\frac{1}{2}\frac{1}{0}$	11	×	$3\frac{1}{2}$	X	$3\frac{1}{2}$	X	$\frac{14}{20}$	11	×	$3\frac{1}{2}$	×	$\frac{1}{2}\frac{5}{0}$	8	×	$3\frac{1}{2}$	×	$\frac{10}{20}$	7	×	$3\frac{1}{2}$	×	$3\frac{1}{2}$	×	9 2 0
	$11 \times \frac{1}{2} \frac{0}{0}$	$3\frac{1}{2}$	×3	$3\frac{1}{2}$	$\times \frac{8}{20}$	11	×	6	×	$\frac{11}{20}$	11	×	31	X	$3\frac{1}{2}$	X	$\frac{14}{20}$	11	X	$3\frac{1}{2}$	×	$\frac{1}{2}\frac{5}{0}$	8	×	$3\frac{1}{2}$	×	$\frac{1}{2}\frac{1}{0}$	7	×	$3\frac{1}{2}$	×	$3\frac{1}{2}$	×	$\frac{1}{2} \frac{0}{0}$
	$11 \times \frac{11}{20}$	$3\frac{1}{2}$	×3	$3\frac{1}{2}$	$\times \frac{8}{20}$	11	×	6	×	$\frac{1}{2}\frac{2}{0}$	$11\frac{1}{2}$	X	31	X	$3\frac{1}{2}$	X	$\frac{1}{2}\frac{4}{0}$						$8\frac{1}{2}$	X	$3\frac{1}{2}$	×	$\frac{11}{20}$	$7\frac{1}{2}$	×	$(3\frac{1}{2})$	×	$3\frac{1}{2}$	×	$\frac{1}{2}\frac{0}{0}$
	$11\frac{1}{2} \times \frac{11}{20}$	$3\frac{1}{2}$	×ŝ	$3\frac{1}{2}$	$\times \frac{9}{20}$	12	×	$6\frac{1}{2}$	×	$\frac{1}{2}\frac{1}{0}$	12	×	3	×	$3\frac{1}{2}$	X	$\frac{1}{2}\frac{4}{0}$						9	X	$3\frac{1}{2}$	×	$\frac{1}{2}\frac{1}{0}$	8	×	$(3\frac{1}{2})$	×	$3\frac{1}{2}$	×	$\frac{1}{2}\frac{0}{0}$
	$11\frac{1}{2} \times \frac{1}{2}\frac{5}{0}$	$3\frac{1}{2}$	×	$3\frac{1}{2}$	$\times \frac{9}{20}$	12	×	$6\frac{1}{2}$	×	$\frac{12}{20}$	12	×	3	X	31	X	$\frac{15}{20}$						9	X	$3\frac{1}{2}$	×	$\frac{1}{2}\frac{2}{0}$	8	×	$(3\frac{1}{2})$	×	$3\frac{1}{2}$	×	$\frac{1}{2}\frac{1}{0}$
	$12 \times \frac{11}{20}$	$3\frac{1}{2}$	X	$3\frac{1}{2}$	$\times \frac{9}{20}$	12	×	$6\frac{1}{2}$	×	$\frac{1}{2}\frac{2}{0}$	12	×	3	1 ×	3	X	$\frac{1}{2}$						9	X	$3\frac{1}{2}$	×	$\frac{12}{20}$	8	×	$(3\frac{1}{2})$	×	$3\frac{1}{2}$	×	$\frac{1}{2}\frac{1}{0}$
	$12 \times \frac{15}{20}$	$\frac{2}{3}\frac{1}{2}$	X	31 2	$\times \frac{10}{20}$	12	×	$6\frac{1}{2}$	X	$\frac{1}{2}\frac{3}{0}$	12	×	3	LX	3	L X	$\frac{1}{2}$						91	X	$3\frac{1}{2}$	X	$\frac{1}{2}\frac{2}{0}$	9	>	(3]	X	$3\frac{1}{2}$	×	$\frac{11}{20}$

(c) The beams of decks fitted exclusively for the accommodation of passengers may be of the size given for upper deck beams.

(a) (b) (c) and (d) The beams at the ends of main or middle, upper and spar deck hatchways, from six to twelve framspaces in length are to be equal in size to those required at alternate frames for the main or middle deck; and the beams at the ends of hatchways of similar lengths in awning decks and bridge decks are to be of the size required for upper deck beams at alternate frames. Single angles fitted to hatchway end beams are to be equivalent in sectional area to the double angles required by S 4A.

area to the double angles required by S4A.

(e) These beams are to be formed of a plate with double angle bars on the upper and lower edges. The beam plates and angle bar are to be of the sizes given above, and the broad flanges of the angle bars are to be fitted horizontally. Semi-box beam may be adopted in lieu thereof, formed of bulb plate and single angle bars of the sizes given for upper deck beams, kneed to two consecutive frames with a covering plate of the thickness of the angles.

Strong beams in the machinery space are to have double angles on their upper and lower edges, unless cross tie plat is fitted on them, in which case only single angles need be fitted to the upper and lower edges.

^{*} If beams of bulb angle section are fitted at alternate frames in vessels exceeding 34 feet in breadth, a steel or iron deck should fitted on these beams.

6 c)]

ori oti &cc

PLATING		000	-		_				_		_	•														_			-			-
NUMBERS OF VESSELS. (See Section 2.)		to 800		3	000	0	4	100	00	5	500	0	-6	300	00	7	700	00	8	300	00	8	900	00	10	000	00	1	100	00	1	20
Under 10 Depths, or Under 8 Breadths in Length.	20	×	. <u>5</u>	20	×	6 2 0	23	×	6 2 0	26	×	6 2 0	28	×	6 2 0	28	×	7 2 0	30	×	7 2 0	32	×	7 2 0	32	×	8 2 0	34	×	8 2 0	36	×
10 to 11 Depths, or 8 to 81 Breadths.	22	×	5 2 0	22	×	6 2 0	25	×	6 2 0	28	×	6 2 0	31	×	6 2 0	32	×	7 2 0	34	×	7 2 0	36	×	7 2 0	36	×	8 2 0	38	×	8 2 0	40	×
11 to 12 Depths, of or State to 9 Breadths.	24	×	5 2 0	25	×	6 2 0	28	×	6 2 0	31	×	6 20	34	×	$\frac{6}{20}$	36	×	$\frac{7}{20}$	38	×	$\frac{7}{20}$	40	×	7 2 0	40	×	8 2 0	42	×	8 2 0	44	×
12 to 13 Depths. Is or 9 to 9½ Breadths.	24	×	6 2 0	25	×	7 2 0	28	×	7 2 0	31	×	7 2 0	34	×	7 2 0	36	×	8 2 0	38	×	8 2 0	40	×	8 2 0	40	×	9 2 0	42	×	$\frac{9}{20}$	44	×
13 to 14 Depths. or or 91 to 10 Breadths.	27	×	6 2 0	28	×	7 2 0	31	×	7 2 0	34	×	7 2 0	37	×	7 2 0	40	×	8 20	42	×	8 2 0	44	×	8 2 0	44	×					46 6 20	
14 to 15 Depths, or 10 to 10½ Breadths.	30	×	6 2 0	31	×	$\frac{7}{20}$	31	×	8 2 0	34	×	8 2 0	37	×	8 2 0	40	×	9 2 0	42	×	9 2 0	44	×	9 2 0	44	×	1020	46	×	$\frac{10}{20}$		×
15 to 16 Depths, or over 10 Breadths.	33	×	6 2 0	34	×	7 2 0	34	×	8 2 0	38	×	8 2 0	40	×	8 2 0	44	×	9 2 0	46	×	9 2 0	48	×	9 2 0	48	×	$\frac{10}{20}$	50	×	$\frac{10}{20}$	52	×
Ends of Stringer Plates.							15	×	5 2 0	17	×	5 2 0	19	×	5 2 0	19	×	6 2 0	20	×	6 2 0	22	×	6 2 0	22	×	7 2 0	23	×	7 2 0	24	×
Hold and Lower Deck Beam Stringer Plates (extreme breadth). Ends of Ditto.																		6 20 5 20														
Tie Plate on Beams, Fore-and-aft, and Diagonals. Ends of Ditto.															6 20 5 20																	

^{1.} The depths for proportions to be taken from upper side of keel to top of upper deck beams in one, two, and three deck ships, and to top of main deck in spar and awning deck vessels; and, in spar decked vessels, two depths may be taken off the proportions, so that in a spar-decked vessel of thirteen and under fourteen depths in length, the stringers, &c., may be of the sizes given in the above Table for vessels of eleven and under twelve depths in length; and so on.

2. In two decked vessels the stringer plates indicated with regard to the vessel's proportions in the above Table are to

be fitted to the upper deck beams.

3. In three decked vessels the stringer plates so indicated in the above Table are to be fitted to both upper and middle deck beams.

^{4.} In spar decked vessels the stringer plates given in the above Table are to be fitted to the main deck beams; and the stringer plates required for the spar deck beams are to be the breadth of, and may be $\frac{1}{20}$ of an inch less in thickness than the stringer plates given on the upper line of the Table for vessels of the same plating number, and may be reduced at their ends $\frac{1}{20}$ of an inch in thickness, before and abaft the half length amidships, and to the breadth given for the ends of the main deck stringer plate in the Table.

(For Nos. 27000 to 72000 see Continuation.)

13000	14000	15000	16000	17000	18000	19000	20000	21000	22000	23000	24000	25000
$36 \times \frac{9}{20}$	$40 \times \frac{9}{20}$	$42 \times \frac{9}{20}$	$42 \times \frac{10}{20}$	$44 \times \frac{10}{20}$	$46 \times \frac{1}{2} \frac{0}{0}$	$48 \times \frac{10}{20}$	$50 \times \frac{10}{20}$	$52 imes rac{1}{2} rac{0}{0}$	$54 \times \frac{10}{20}$			Complete $58 \times \frac{10}{20}$ Stl Dk $\frac{6}{20}$
$40 \times \frac{9}{20}$	$44 \times \frac{9}{20}$	$46 \times \frac{9}{20}$	$46 \times \frac{10}{20}$	$48 \times \frac{10}{20}$	$50 \times \frac{10}{20}$	$52 \times \frac{10}{20}$	1			$58 \times \frac{10}{20}$ Complete		$62 \times \frac{10}{20}$ Deck $\frac{6}{20}$
$44 \times \frac{9}{20}$	$48 \times \frac{9}{20}$	$50 \times \frac{9}{20}$					$54 \times \frac{10}{20}$ Complete	1 - 1		$60 \times \frac{10}{20}$ Complete		$64 \times \frac{10}{20}$ $20 \times \frac{7}{20}$
		$48 \times \frac{10}{20}$ Length				$56 \times \frac{10}{20}$ Deck $\frac{6}{20}$		$60 imes rac{1}{2} rac{0}{0}$	$62 imes rac{1}{2} rac{0}{0}$ Complete		$66 \times \frac{10}{20}$ $\text{Deck } \frac{7}{20}$	$68 \times \frac{1}{2} \frac{0}{0}$
	$48 \times \frac{10}{20}$ Complete	$50 \times \frac{10}{20}$ Steel	$52 \times \frac{10}{20}$ Deck $\frac{6}{20}$		$58 \times \frac{10}{20}$	$60 \times \frac{10}{20}$	$62 \times \frac{10}{20}$ Complete		$66 \times \frac{10}{20}$ $\text{Deck } \frac{7}{20}$		$70 \times \frac{10}{20}$	$\begin{array}{c} \text{CplStl } \frac{7}{20} \\ \text{Up Dk } \frac{1}{20} \\ 51 \times \frac{1}{20} \\ \text{\& Mdl } \frac{7}{20} \\ \text{Dk} \frac{1}{2} \text{L. } \frac{7}{20} \end{array}$
$50 \times \frac{10}{20}$	$52 \times \frac{10}{20}$ $20 \times \frac{6}{20}$	$54 imes rac{10}{20}$	$56 \times \frac{10}{20}$	$58 \times \frac{10}{20}$ Complete		Deck 7			$46 \times \frac{10}{20}$ and Middle	Dk for Half	$50 \times \frac{10}{20}$ Lngth $\frac{7}{20}$	$52 \times \frac{10}{20}$ $MdlDk\frac{7}{20}$
$54 \times \frac{10}{20}$	$56 \times \frac{10}{20}$	$58 \times \frac{10}{20}$	$60 \times \frac{10}{20}$	$62 \times \frac{10}{20}$	$64 \times \frac{10}{20}$	$44 \times \frac{10}{20}$	Steel Uppr $45 \times \frac{10}{20}$ Dk for Half	$46 \times \frac{10}{20}$	$47 \times \frac{10}{20}$	$48 \times \frac{10}{20}$	$50 \times \frac{10}{20}$	$\begin{array}{c} \text{Cpl SH} & 8 \\ \text{Up Dk} & \overline{20} \\ 52 \times \frac{10}{20} \\ \text{and} & \underline{7} \\ \text{MdlDk} & \underline{20} \end{array}$
$24 \times \frac{8}{20}$	$26 imes rac{8}{20}$	$28 \times \frac{8}{20}$	$28 \times \frac{8}{20}$	$29 imes rac{8}{20}$	$30 \times \frac{8}{20}$	$31 \times \frac{8}{20}$	$32 \times \frac{8}{20}$	$33 \times \frac{8}{20}$	$35 \times \frac{8}{20}$	$36 \times \frac{8}{20}$	$36 imes rac{8}{20}$	$37 \times \frac{8}{20}$
		$30 \times \frac{8}{20}$ $24 \times \frac{7}{20}$				1						$41 \times \frac{9}{20}$ $32 \times \frac{8}{20}$
-	-		$12 \times \frac{1}{2} \frac{0}{0}$	$13 \times \frac{1}{2} \frac{0}{0}$	-	$\frac{1}{3} \times \frac{1}{2} \frac{0}{0}$	$14 \times \frac{10}{20}$	$14 \times \frac{1}{2} \frac{0}{0}$	$15 \times \frac{10}{20}$			$\frac{32 \times 20}{16 \times \frac{10}{20}}$

^{5.} In avoning decked vessels the stringer plates given in the above Table are to be fitted to the main deck beams, and the stringer plates required for the awning deck beams are to be of the same width as those given in the Table for hold beam stringer plates, and to be of the following thicknesses, viz.:—

In Vessels whose plating number is under 13,000, not less than $\frac{6}{20}$ of an inch.

13,000 an	d und	er 18,000	"	"	$\frac{7}{20}$	"	"
18,000	"	24,000	"	"	$\frac{8}{20}$	"	71
24,000	,,	31,000	,,	,,	$\frac{9}{20}$	"	"

^{6.} All stringer plates are to maintain their midship breadth for one-half the vessel's length amidships; from thence the breadth may be gradually reduced to that given above for the ends of the vessel.

orms offices.

PLATING NUMBERS OF VESSELS. (See Section 2.)	27000	28000	29000	31000	32000	34000	35000	36000	38000	3
Under 10 depths, or Under 8 Breadths in Length,	$60 \times \frac{10}{20}$ Complete	$62 \times \frac{10}{20}$ Stl Dk $\frac{6}{20}$	$65 imes rac{1}{2} rac{0}{0}$		$70 imes rac{1}{2} rac{0}{0}$ Steel Deck		$56 \times \frac{10}{20}$	$\begin{array}{c} \text{Up Dk } \frac{7}{20} \\ 57 \times \frac{10}{20} \\ \frac{1}{2} \text{ Lgth } \frac{7}{20} \end{array}$	$58 \times \frac{10}{20}$	59
10 to 11 Depths, or 8 to 8½ Breadths,	$64 \times \frac{10}{20}$	$66 \times \frac{10}{20}$ Complete		$70 \times \frac{10}{20}$ $20 \times \frac{7}{20}$	$72 \times \frac{10}{20}$	$55 \times \frac{10}{20}$	20	$57 \times \frac{1}{2} \frac{0}{0}$	Upper and $58 \times \frac{10}{20}$ Deck $\frac{7}{20}$	59
11 to 12 Depths, of or 8½ to 9 Breadths.	$66 \times \frac{1}{2} \frac{0}{0}$ Complete	20	$70 \times \frac{10}{20}$	Cmpl Steel $54 imes rac{1}{2} rac{0}{0}$ and Mid Dk	$55 \times \frac{10}{20}$	Cmpl Steel $56 \times \frac{10}{20}$ Middle	$57 \times \frac{10}{20}$	and	Cmpl Steel $59 \times \frac{10}{20}$ and	60 M
12 to 13 Depths, or or or g to 9½ Breadths.	$70 \times \frac{10}{20}$ Deck $\frac{7}{20}$	Cmpl Steel $53 imes rac{1}{2} rac{0}{0}$ and Mid Dk	$54 \times \frac{10}{20}$	$55 \times \frac{10}{20}$	$56 \times \frac{10}{20}$	-		$\begin{array}{c} \text{Deck } \frac{8}{20} \\ 59 \times \frac{10}{20} \end{array}$	Cmpl Steel $60 \times \frac{10}{20}$ Middle	61
13 to 14 Depths, or or substitution of the latest the latest term of t	Cmp Stl 7 Up Dk $\frac{7}{20}$ $\frac{52 \times \frac{10}{20}}{20}$ & Mdl $\frac{7}{20}$ Dk $\frac{1}{2}$ L. $\frac{7}{20}$	$53 \times \frac{10}{20}$	$54 \times \frac{10}{20}$	Cmpl Steel $55 imes rac{1}{2} rac{0}{0}$ and Middle	$56 \times \frac{10}{20}$	Cmpl Steel $57 \times \frac{10}{20}$ Middle		and $59 \times \frac{10}{20}$ $\frac{8}{20}$		61 Mid
14 to 15 Depths, or 10 to 10½ Breadths.		Cmpl Steel $54 imes rac{1}{2} rac{0}{0}$ and Mid Dk	$55 \times \frac{10}{20}$	Cmpl Steel $56 \times \frac{10}{20}$ Middle		$58 \times \frac{10}{20}$		$\begin{array}{c} \text{Deck} & \frac{9}{20} \\ 60 \times \frac{10}{20} \\ \frac{8}{20} \end{array}$	Cmpl Steel $61 \times \frac{10}{20}$ Middle	61
15 to 16 Depths, over 10½ Breadths.	$\begin{array}{c} \text{CmpStl} & 8 \\ \text{Up Dk} & \overline{20} \\ \end{array}$ $\begin{array}{c} 53 \times \frac{1}{20} \\ \text{and} \\ \text{Mdl Dk} & \overline{20} \\ \end{array}$	Cmpl Steel $54 \times \frac{10}{20}$ Middle Dk	$55 \times \frac{10}{20}$							
Ends of Stringer Plates.	$38 \times \frac{8}{20}$	$40 \times \frac{8}{20}$	$41 \times \frac{8}{20}$	$42 \times \frac{8}{20}$	$43 \times \frac{8}{20}$	$44 \times \frac{8}{20}$	$45 \times \frac{9}{20}$	$45 \times \frac{9}{20}$	$46 \times \frac{9}{20}$	47
Hold and Lower Deck Beam Stringer Plates (extreme breadth). Ends of ditto.	$42 \times \frac{9}{20}$ $33 \times \frac{8}{20}$	$\frac{43 \times \frac{9}{20}}{33 \times \frac{8}{20}}$		$45 \times \frac{9}{20}$ $35 \times \frac{8}{20}$					$51 \times \frac{9}{20}$ $40 \times \frac{8}{20}$	52 41
Tie Plates on Beams, Fore-and-aft, and Diagonals. Ends of ditto.	$ \begin{array}{c} \hline 16 \times \frac{10}{20} \\ \hline 16 \times \frac{8}{20} \end{array} $	$ \begin{array}{c} \hline 17 \times \frac{10}{20} \\ 17 \times \frac{8}{20} \end{array} $							$ 20 \times \frac{10}{20} $ $ 20 \times \frac{8}{20} $	21 21

7. Where a reduction of $\frac{2}{20}$ the of an inch from the midship thickness is allowed for the ends, the stringer plates make reduced $\frac{1}{20}$ th of an inch in thickness for one-eighth of the vessel's length before and abaft the half length amidship and from thence to the ends they may be reduced to the thickness required at ends.

8. Where there is a *steel dech* prescribed either for the entire length of the vessel, or for half the length amidships, is to be fitted to the upper deck beams in two-decked vessels. In three-decked vessels and spar-decked vessels it may be fitted either to the upper or middle deck beams.

9. In way of a steel deck or half-steel deck, the stringer plates may be reduced in width to one inch for every seve feet of the length of the vessel, but the thickness is to be as given above, and at the ends of the vessel the stringer plates to be in accordance with the Table for "ends of stringer plates." Where more than one steel deck is require the stringer plates are to be of the breadth and thickness given in the Table.

10. Where a steel deck is prescribed in the Table to be fitted for one half the vessel's length amidships, it is to be maintained the full breadth of the vessel for that length, and then tapered gradually into the stringer plates for one eighth the vessel's length at each end.

(Continued.)

		-		-			-				and the state of t	7
0000	42000	44000	46000	48000	50000	52000	54000	57000	60000	64000	68000	72000
ıd	Cmpl Stee	UpperDck	8 thick	CmplSteel	Upper	and	Cmpl Steel	Upper	Deck $\frac{9}{20}$	Cmpl Steel	Upper	and
							1		$76 \times \frac{11}{20}$	e e		$82 \times \frac{11}{20}$
thick		Middle Dk				$\frac{8}{20}$	1		8 20	1	Deck	9 20
per Dk			CONTRACTOR OF THE PARTY OF THE	Upper			Upper Dk		Cmpl Steel		and	$3 \text{ Dks } \frac{10}{20}$
$\times \frac{1}{2} \frac{0}{0}$	$60 \times \frac{11}{20}$	$62 \times \frac{11}{20}$	$64 \times \frac{11}{20}$	$66 \times \frac{11}{20}$	$68 \times \frac{11}{20}$	$70 \times \frac{11}{20}$	$72 \times \frac{11}{20}$	$74 \times \frac{1}{2} \frac{1}{0}$	$76 \times \frac{11}{20}$	$78 \times \frac{11}{20}$	$80 \times \frac{11}{20}$	$82 \times \frac{11}{20}$
Deck	$\frac{7}{20}$ thick		Middle	Deck	$\frac{8}{20}$	and	Middle Dk	$\frac{8}{20}$	Middle	Deck	9 2 0	$\frac{9}{20} & \frac{7}{20}$
		Upper	and	Cmpl Steel	Upper Dk	$\frac{9}{20}$		Cmpl Steel	Upper and		Cmpl Steel	UpDk $\frac{10}{20}$
$\times \frac{11}{20}$	$62 \times \frac{11}{20}$	$64 \times \frac{11}{20}$	$66 \times \frac{11}{20}$	$68 \times \frac{11}{20}$	$70 \times \frac{11}{20}$	$72 \times \frac{11}{20}$	$74 \times \frac{11}{20}$	$76 \times \frac{11}{20}$	$78 \times \frac{11}{20}$	$80 \times \frac{11}{20}$	$80 \times \frac{11}{20}$	$82 \times \frac{11}{20}$
$k \frac{7}{20}$		Deck $\frac{8}{20}$		and	Middle Dk	$\frac{8}{20}$		Middle Dk	$\frac{9}{20}$		Md Dk $\frac{9}{20}$	$\operatorname{Lr}\operatorname{Dk}\frac{7}{20}$
	1	Upper	20						Cmpl Steel			
$\times \frac{1}{2} \frac{1}{0}$	$63 \times \frac{11}{20}$	$65 \times \frac{11}{20}$	$67 \times \frac{11}{20}$	$69 \times \frac{11}{20}$	$71 \times \frac{11}{20}$	$73 \times \frac{1}{2} \frac{1}{0}$	$75 \times \frac{1}{20}$	$77 \times \frac{1}{2} \frac{1}{0}$	$78 \times \frac{11}{20}$	$80 \times \frac{11}{20}$	$82 \times \frac{1}{2} \frac{1}{0}$	$82 \times \frac{11}{20}$
		Deck $\frac{8}{20}$	thick		Cmpl Steel			AR ()		Lower	Deck $\frac{7}{20}$	thick
	Cmpl Stee				Cmpl Steel		M 0					
$\times \frac{11}{20}$				$69 \times \frac{1}{2} \frac{1}{0}$	$71 \times \frac{11}{20}$	$73 \times \frac{11}{20}$	$75 \times \frac{11}{20}$	$77 \times \frac{11}{20}$	$79 \times \frac{11}{20}$			
thick		Deck $\frac{9}{20}$			and	Lower	Deck $\frac{7}{20}$	thick				
		UpDk $\frac{10}{20}$										
		$66 \times \frac{11}{20}$										
k	and Lowe	Deck	$\frac{7}{20}$ thick	Company								
-												
											NAME AND ADDRESS OF THE PARTY O	
												- 01
$\times \frac{9}{20}$	$49 \times \frac{9}{20}$	$50 \times \frac{9}{20}$	$51 \times \frac{9}{20}$	$52 \times \frac{9}{20}$	$53 \times \frac{9}{20}$	$54 \times \frac{9}{20}$	$55 \times \frac{9}{20}$	$56 \times \frac{9}{20}$	$57 \times \frac{9}{20}$	$58 \times \frac{9}{20}$	$60 \times \frac{9}{20}$	$62 \times \frac{9}{20}$
V												-
× 10	$54 \times \frac{10}{20}$	$55 \times \frac{10}{20}$	$56 \times \frac{10}{20}$	$57 \times \frac{10}{20}$	$58 \times \frac{10}{20}$	$59 \times \frac{10}{20}$	$60 \times \frac{10}{20}$	$61 \times \frac{10}{20}$	$62 \times \frac{10}{20}$	$63 \times \frac{10}{20}$	$64 \times \frac{10}{20}$	$65 \times \frac{10}{20}$
$\times \frac{8}{20}$	$42 \times \frac{8}{20}$	$43 \times \frac{8}{20}$	$44 \times \frac{8}{20}$	$45 \times \frac{8}{20}$	$46 \times \frac{8}{20}$	$47 \times \frac{8}{20}$	$48 \times \frac{8}{20}$	$49 \times \frac{8}{20}$	$50 \times \frac{8}{20}$	$51 \times \frac{8}{20}$	$52 \times \frac{8}{20}$	$53 \times \frac{8}{20}$
× 10	22 × 10	93 × 10	24 × 10	25 × 10	26 × 10	27 × 10	28 × 10	20 × 10	30 × 10	31 × 10	39 × 10	$33 \times \frac{10}{20}$
$\times \frac{8}{20}$	$22 \times \frac{8}{20}$	$23 \times \frac{8}{20}$	$24 \times \frac{8}{20}$	$25 \times \frac{8}{20}$	$26 \times \frac{8}{20}$	$27 \times \frac{8}{20}$	$28 \times \frac{8}{20}$	$29 \times \frac{8}{20}$	$30 \times \frac{8}{20}$	$31 \times \frac{8}{20}$	$32 \times \frac{8}{20}$	$33 \times \frac{8}{20}$
OCCUPATION OF THE PARTY OF THE	CONTRACTOR DE L'ANDRES	THE OWNER WHEN THE PARTY OF	CONTRACTOR OF THE PARTY OF THE	COLUMN TO SERVICE STATE	DECEMBER 20-7515601-41080140	THE PARTY OF THE P	NECTOR SHOW DRIVEN ON THE PARTY AND	THE REAL PROPERTY AND ADDRESS OF THE PERSON NAMED OF THE PERSON NA	THE PERSON NAMED IN COLUMN 2 IS NOT THE OWNER.	OV LITTER VALUE AND ALTERNATION OF	P. T. CHESCOLIS SCA. MINE	TOWN THE PROPERTY AND PROPERTY AND PARTY.

^{11.} Orlop stringer plates where required to be fitted, to be of the same thickness as the hold beam stringer plates, and three-fourths the breadth of the same.

LLOYD'S REGISTER OF SHIPPING, 2, WHITE LION COURT, CORNHILL, LONDON, E.C. 29th November, 1888.

orms otices.


boar

king

^{12.} Diagonal tie plates are to be fitted on the beams of all sailing vessels in way of the masts at the deck on which they are wedged, and in addition, where the plating number is 15,000 and above, diagonal tie plates are to be fitted all fore and aft on the upper deck.

^{13.} In sailing vessels whose plating number is under 15,000, and in steam vessels not requiring a steel deck, if diagonal tie plates be fitted on the beams in sufficient number, and to the satisfaction of the Surveyor, their breadth as given in the Table may be deducted from the breadth given above for the stringer plates amidships, in which case the stringer plates may be reduced in breadth at the ends of the vessel to three-fourths of their breadth amidships.

^{14.} Tie plates on all tiers of beams to be of the same thickness as the stringer plates of their respective decks.

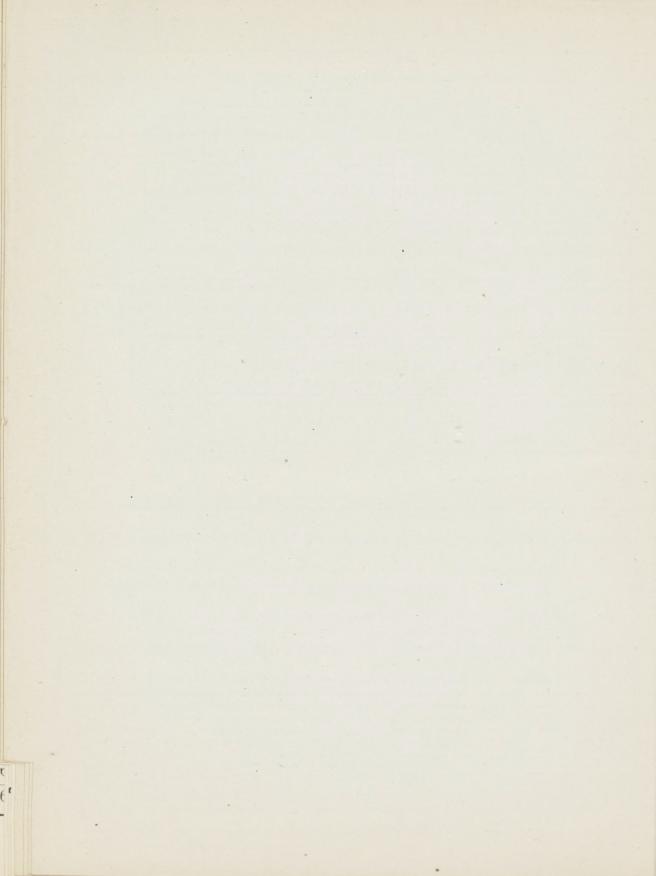

orms

Additions beyond the requirements contained in to depth than in Vessels for whi

Proportion of Depths to	ITEMS.	PLATINO
Length.		UNDER 10450
Above 11 and not exceeding 12	1 Sheerstrake	1 Add $\frac{1}{20}$ for $\frac{1}{2}$ length amidships
Above 12 and not exceeding 13	2 Strake below Sheerstrake	1 Add $\frac{2}{20}$ for $\frac{3}{4}$ length amidships
Above 13 and not exceeding 14	2 Strake below Sheerstrake 3 Upper deck Stringer Plate 4 Middle line Keelson 5 Side Keelson 6 Bilge Keelson 7 Bilge Stringer	1 Add Doubling 18 inches wide for \$\frac{3}{5}\$ length amidships 2 3 4 5 Double Angle Keelson to be fitted in all cases 6 Add Bulb for \$\frac{3}{5}\$ length amidships 7 Add Bulb for \$\frac{1}{2}\$ length amidships 8 Two Strakes increased \$\frac{1}{20}\$ for \$\frac{1}{2}\$ length amidships
Above 14 and not exceeding 15.	2 Strake below Sheerstrake	1 Add Doubling 20 inches wide for \(\frac{5}{4}\) length amidships 2
Above 15 and not exceeding 16	3 Second Strake below Sheerstrake 4 Upper deck Stringer plate 5 Middle line Keelson 6 Side Keelson 7 Bilge Keelson 8 Bilge Stringer	1

For all Vessels exceeding in length sixteen depths to the Middle Deck, plans must be submitted for the approval of the Committee for giving the Vessels sufficient additional strength longitudinally; and all Vessels having a length of thirteen depths and above to the Upper Deck, are to have a substantial erection extending over the midship half length of the Vessel. See also Section 46.

Where Bulb plates are required they are to be $\frac{1}{4}$ of an inch in depth for each foot of moulded breadth of the vessel and the thickness should not be less than $\frac{1}{20}$ the depth.

ules; for Vessels of greater proportionate length ne ordinary Scantlings are provided.

TABLE S 6.

(For Nos. 18700 to 40000 see continuation.)


NUMBERS.

10450 and under 15500	15500 and under 18700
Add $\frac{1}{20}$ for $\frac{3}{6}$ length amidships	1 Add $\frac{1}{20}$ for $\frac{3}{4}$ length amidships
	2
	3
	4
	5
Add Bulb for $\frac{1}{2}$ length amidships	6 Add Bulb for ½ length amidships
	7
One Strake increased $\frac{1}{20}$ for $\frac{1}{2}$ length amidships	8 One Strake increased $\frac{1}{20}$ for $\frac{1}{2}$ length amidships
Add $\frac{2}{20}$ for $\frac{5}{4}$ length amidships	
Add $\frac{1}{20}$ for 1 length amidships	2 Add $\frac{1}{20}$ for $\frac{1}{2}$ length amidships
	3
	4
	5
Add Bulb for $\frac{3}{5}$ length amidships	6 Add Bulb for \$\frac{3}{5}\$ length amidships
Two Strokes increased 1 for 1 length amidshine	7
Two Strakes increased $\frac{1}{20}$ for $\frac{1}{2}$ length amidships	8 Two Strakes increased $\frac{1}{20}$ for $\frac{1}{2}$ length amidships
Add Doubling 20 inches wide for $\frac{3}{5}$ length amidships	1 Add Doubling whole width below Stringer for 3 length amids.
	2
	3
Add Intercostal	5
Add Intercostal	6 Add Bulb for $\frac{3}{5}$ length amidships
Add Bulb for ½ length where no hold beams	7 Add Intercostal for ½ length amidships, or
Two Strakes increased $\frac{1}{20}$ for $\frac{1}{2}$ length amidships	8 Three Strakes increased $\frac{1}{20}$ for $\frac{1}{2}$ length amidships
Add Doubling whole width below Stringer for \$\frac{a}{4}\$ length amids.	1 Add Doubling whole width below Stringer for \(^84\) length amids.
	2
	3 Add $\frac{1}{20}$ for $\frac{1}{2}$ length amidships
	4
Add Intercostal	5
Add Bulb for \(\frac{2}{5}\) length amidships	6 Add Bulb for \$\frac{3}{5}\$ length amidships
Add Intercostal for $\frac{1}{2}$ length amidships, or One Strake doubled for $\frac{1}{2}$ length amidships	7 Add Intercostal for $\frac{1}{2}$ length amidships, or 8 One Strake doubled for $\frac{1}{2}$ length amidships
One Strake doubled for ½ length amidships	8 One Strake doubled for \(\frac{1}{2}\) fength amidships
Add Doubling whole width below Stringer for 3/4 length amids.	
Add $\frac{1}{20}$ for $\frac{1}{2}$ length amidships	2 Add $\frac{2}{20}$ for $\frac{1}{2}$ length amidships
	3
	4
	5
Add Intercostal	6
Add Bulb for $\frac{3}{5}$ length amidships	7 Add Intercostal for \$\frac{1}{5}\$ length amidships
Add Intercostal for ½ length amidships, or	8 Add Intercostal for ½ length amidships, or
One Strake doubled for ½ length amidships	9 One Strake doubled for \(\frac{1}{2}\) tength amidships \(\therefore\).

All vessels, excepting those with an awning deck, whose plating No. exceeds 35,000 and exceeding 16 depths in length taken from the main deck, are to have the whole of the reverse frames extended to the gunwale for half the vessel's length amidships, or a sufficient number of partial bulkheads fitted in the 'tween decks to the approval of the Committee. In the case of awning-decked vessels they are all to extend to the main deck.

orms otices. &c:

boar

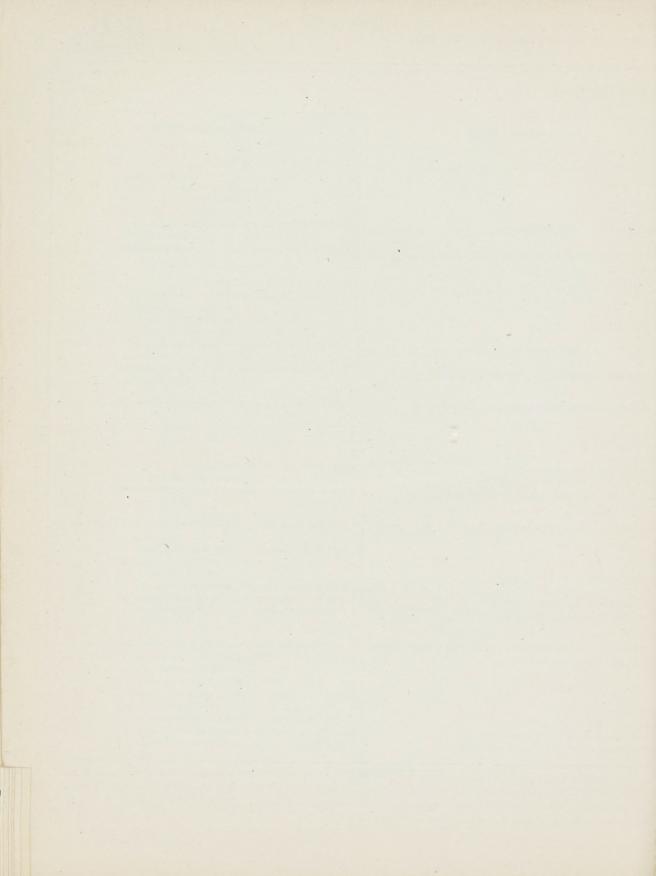

orms otice &c: boa kin Additions beyond the requirements contained in the to depth than in Vessels for which

Proportion of Depths	ITEMS.		PLATING
Length.		18700 and under 26000	26000 and under 35000
Above 11 and not exceeding 12	1 Sheerstrake 2 Strake below Sheerstrake 3 Upper deck Stringer plate 4 Middle line Keelson 5 Side Keelson 6 Bilge Keelson 7 Bilge Stringer 8 Bilge Plating	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	1 Add $\frac{2}{20}$ for $\frac{3}{4}$ length amidships 2 Add $\frac{2}{20}$ for $\frac{1}{2}$ length amidships 3 4 5 Add Bulb for $\frac{1}{2}$ length amidships 6 Add Bulb for $\frac{3}{5}$ lgth. & Intcl. for $\frac{1}{2}$ lgth. amids 7 Add Intercostal for $\frac{1}{2}$ length amidships 8
Above 12 and not exceeding 13	1 Sheerstrake 2 Strake below Sheerstrake 3 Upper deck Stringer plate 4 Middle line Keelson 5 Side Keelson 6 Bilge Keelson 7 Bilge Stringer 8 Bilge Plating	1 Add \$\frac{2}{20}\$ for \$\frac{3}{4}\$ length amidships 2 Add \$\frac{2}{20}\$ for \$\frac{1}{2}\$ length amidships 3	1 Add $\frac{2}{20}$ for $\frac{3}{4}$ length amidships 2 Add $\frac{2}{20}$ for $\frac{1}{2}$ length amidships 3 Add $\frac{2}{20}$ for $\frac{3}{2}$ length amidships 4
Above 13 and not exceeding 14	1 Sheerstrake 2 Strake below Sheerstrake 3 Upper deck Stringer plate 4 Middle line Keelson 6 Bilge Keelson 7 Bilge Stringer 8 Bilge Plating	1 Add Dblng. whole width below Stringer for 2	1 Add Doubling whole width for \$\frac{3}{4}\$ lgth, amids 2
exceeding 15	1 Sheerstrake 2 Strake below Sheerstrake 3 Upper deck Stringer plate 4 Middle line Keelson 6 Bilge Keelson 7 Bilge Stringer 8 Bilge Plating	1 Add Doubling whole width for \$\frac{3}{4}\$ lgth. amids. 2	1 Add Doubling whole width for \$\frac{3}{4}\$ lgth, amids. 2 Add Doubling whole width for \$\frac{3}{4}\$ lgth, amids. 3 Add \$\frac{2}{20}\$ for \$\frac{3}{5}\$ length amidships. 4 To be \$\frac{1}{4}\$ deeper than in Table \$\mathbb{S}\$ 3. 5 Add plate Keelson (\$\mathbb{C}\$) for \$\frac{1}{2}\$ length amids. 6 Add Bulb for \$\frac{3}{2}\$ lgth. & Intel. for \$\frac{3}{5}\$ lgth, amids. 7 Add Intercostal for \$\frac{3}{5}\$ length amidships. 8
Above 15 and not exceeding 16	1 Sheerstrake	1 Add Doubling whole width for \$\frac{3}{4}\$ lgth. amids. 2 Add Doubling whole width for \$\frac{1}{2}\$ lgth. amids. 3	1 Add Doubling whole width for ⅓ lgth, amids. 2 Add Doubling whole width for ⅓ lgth, amids. 3

⁽a) Continuous plate Keelson standing on the floors and attached to Intercostal Keelson plates, having double angles on upper, and lower edges of the sizes given in Table S 3, the plate to be of sufficient depth to take the deep flanges of the angles, and to be of the thickness given in Table S 3 for middle line Keelsons.

⁽b) Continuous plate Keelson standing on the floors and attached to Intercostal Keelson plates, having double angles on upper and lower edges of the sizes given in Table S 3, the plate to be three-fourths the depth given in Table S 3 for middle line Keelsons, and of the same thickness.

TABLE S 6.

(continued.)

NUMBERS.

35000 and under 40000	40000 and under 50000
1 Add $\frac{2}{20}$ for $\frac{3}{4}$ length amidships 2 Add $\frac{2}{20}$ for $\frac{1}{2}$ length amidships 3 4 5 Add plate Keelson (**) for $\frac{1}{2}$ length amidships 6 Add Bulb for $\frac{2}{3}$ length and Intercostal for $\frac{1}{2}$ length amidships 7 Add Intercostal for $\frac{3}{5}$ length amidships 8	1 Add $\frac{3}{20}$ for $\frac{3}{4}$ length amidships. 2 Add $\frac{3}{20}$ for $\frac{1}{2}$ length amidships. 3 Add $\frac{3}{20}$ for $\frac{3}{3}$ length amidships. 4 5 Add plate Keelson (47) for $\frac{1}{2}$ length amidships. 6 Add Bulb for $\frac{3}{5}$ length and Intercostal for $\frac{1}{2}$ length amidships. 7 Add Intercostal for $\frac{3}{5}$ length amidships. 8
1 Add Doubling whole width for \$\frac{3}{4}\$ length amidships 2 3 Add \$\frac{2}{20}\$ for \$\frac{3}{5}\$ length amidships 5 Add plate Keelson (\$\sigma\$) for \$\frac{1}{2}\$ length amidships 6 Add Bulb for \$\frac{3}{5}\$ length and Intercostal for \$\frac{1}{2}\$ length amidships 7 Add Intercostal for \$\frac{3}{5}\$ length amidships 8	1 Add Doubling whole width for \(^3\) length amidships. 2 Add \(^2\) for \(^1\) length amidships. 3 Add \(^2\) for \(^3\) length amidships. 4 5 Add plate Keelson (\(\beta\)) for \(^1\) length amidships. 6 Add Bulb for \(^3\) length and Intercostal for \(^1\) length amidships. 7 Add Intercostal for \(^3\) length amidships. 8
1 Add Doubling whole width for \(^3\) length amidships \(^2\). 2 Add Doubling whole width for \(^1\) length amidships \(^3\). 3 Add \(^2\) for \(^3\) length amidships \(^4\). 4 To be \(^1\) deeper than in Table \(^3\). 5 Add plate Keelson (\(^6\)) for \(^1\) length amidships \(^6\). 6 Add Bulb for \(^3\) length and Intercostal for \(^1\) length amidships \(^7\) Add Intercostal for \(^3\) length amidships \(^8\).	1 Add Doubling whole width for \(\frac{3}{4}\) length amidships. 2 Add Doubling whole width for \(\frac{1}{2}\) length amidships. 3 Add Doubling 42 inches wide for \(\frac{3}{5}\) length amidships. 4 To be \(\frac{1}{4}\) deeper than in Table S3. 5 Add plate Keelson (\(\psi\)) for \(\frac{1}{2}\) length amidships. 6 Add plate Keelson (\(\psi\)) for \(\frac{1}{2}\) length amidships. 7 Add Intercostal for \(\frac{3}{5}\) length amidships. 8
1 Add Doubling whole width for \(^3\) length amidships 2 Add Doubling whole width for \(^1\) length amidships 3 Add Doubling 42 inches wide for \(^3\) length amidships 4 To be \(^1\) deeper than in Table S 3 5 Add plate Keelson (\(\mathbf{V}\)) for \(^1\) length amidships 6 Add plate Keelson (\(\mathbf{V}\)) for \(^1\) length amidships 7 Add Intercostal for \(^3\) length amidships 8	1 2 3 4 5 To be specially considered.
1 Add Doubling whole width for $\frac{3}{4}$ length amidships	To be specially considered. To be specially considered.

In lieu of the doubling plates required above, the thickness of the Sheerstrake, the strake next below the sheerstrake, and the upper deck stringer plate may be increased in thickness to afford equivalent strength. In vessels where the plating number is over 28,000, and double butt straps are not required by Section 20, paragraph 8, such straps are to be fitted to the butts of the sheerstrake.

orriotii &c

STEEL VESSELS.

Table of Scantlings for DOUBLE BOTTOMS CONSTRUCTE

1					Margin Plate.	Thickne	ss of Inner Plating.	Bottom
The second secon	PLATING NUMBER FOR REGULATING SCANTLINGS. (See Section 2.)	Centre Girder. Depth above Top of Keel and Thickness.	Thick- ness of Side Girders	SideGirders (exclusive of Margin Plates) on each side, with Floors at alternate Frames.		In Engine and Boiler Space, and Middle Line Strake, for Half Length Amidships (b)	Middle Line Strake at Ends.	Remain der of Plating before an abaft th Engine as Boiler Space.
ı		inches.	inches.		inches.	inches.	inches.	inches.
ı	Under 11,000	$32 \times \frac{8}{20}$	$\frac{6}{20}$	2	$20 \times \frac{6}{20}$	$\frac{7}{20}$	$\frac{6}{20}$	6 20
-	11,000 and 13,000	$33 \times \frac{8}{20}$	$\frac{6}{20}$.	2	$21 \times \frac{7}{20}$	8 2 0	$\frac{6}{20}$	$\frac{6}{20}$
	13,000 and 15,000	$34 \times \frac{8}{20}$	$\frac{6}{20}$	3	$22 \times \frac{7}{20}$	8 2 0	$\frac{7}{20}$	7 20
-	15,000 and under 18,000	$35 \times \frac{9}{20}$	$\frac{7}{20}$	3	$24 \times \frac{7}{20}$	8 2 0	$\frac{7}{20}$	7 20
	18,000 and under 21,000	$36 \times \frac{9}{20}$	$\frac{7}{20}$	3	$26 \times \frac{8}{20}$	$\frac{8}{20}$	$\frac{7}{20}$	$\frac{7}{20}$
	21,000 and under 24,000	$38 \times \frac{10}{20}$	$\frac{7}{20}$	3	$28 \times \frac{8}{20}$	$\frac{9}{20}$	$\frac{8}{20}$	7 20
	24,000 and under 28,000	$40 \times \frac{10}{20}$	$\frac{7}{20}$	3	$30 \times \frac{9}{20}$	$\frac{9}{20}$	$\frac{8}{20}$	7 20
	28,000 and under 33,000	$42 \times \frac{10}{20}$	$\frac{8}{20}$	3	$32 \times \frac{9}{20}$	$\frac{1}{2}\frac{0}{0}$	8 2 0	8 to 2
	33,000 and 38,000	$44 \times \frac{10}{20}$	$\frac{8}{20}$	4	$35 \times \frac{10}{20}$	$\frac{1}{2}\frac{0}{0}$	$\frac{8}{20}$	8 to 2
-	38,000 and under 44,000	$46 \times \frac{1}{20}$	$\frac{8}{20}$	4	$38 \times \frac{10}{20}$	$\frac{10}{20}$	8 2 0	8 20
	44,000 and s1,000	$48 \times \frac{1}{2} \frac{1}{0}$	$\frac{9 \log 8}{20}$	4	$40 \times \frac{11}{20}$	$\frac{1}{2}\frac{1}{0}$	$\frac{9}{20}$	9 to 2
	51,000 and 59,000	$50 \times \frac{1}{20}$	$\frac{9 \text{ to } 8}{2 \text{ 0}}$	4	$42 \times \frac{1}{2} \frac{1}{0}$	$\frac{1}{2}\frac{1}{0}$	$\frac{9}{20}$	9 to 2
	59,000 and under 68,000	$52 \times \frac{1}{2} \frac{2}{0}$	9 to 8 2 0	4	$44 \times \frac{11}{20}$	$\frac{1}{2}\frac{1}{0}$	$\frac{9}{20}$	9 to 2
	68,000 and 178,000	$54 \times \frac{12}{20}$	1 0 to 9	4	$46 \times \frac{12}{20}$	$\frac{1}{2}$	$\frac{9}{20}$	$\frac{1}{2}\frac{0}{0}$ to $\frac{1}{2}$

⁽a) Where Flat Plate Keels are adopted, the Angles connecting the same to the centre Plate are to be of the size required for Middle Line Keelsons in Table S 3.

Keelsons in Table S 3.

(b) The breadth of the Middle Line Strake of the Inner Bottom Plating to be not less than that given for Garboard Strakes in Table

Where Flanged Plates are adopted for Floors, Brackets, Intercostal Plates, &c., as a substitute for fitting angles on the edges, such Plates are to be $\frac{1}{20}$ of an inch thicker than that given in the Table, and the faying surface should not be less than the breadth of the flange of the angle required by the rule. The Floor plates and other parts of the inner bottom in the Boiler space to be $\frac{1}{20}$ th of an inch thicker than given in the above Table.

TABLE S 7.

ON THE CELLULAR SYSTEM.

(See Section 24.)

Thick-	DIME	ENSIONS OF ANGLE E	Connection of Floors and Outside Brackets			
Brack't or Floor			On Side Girders,		In Plates.	
Plates.	On Centre Girder.	On Margin Plates.	Vertical Angle Bars.	Diameter of Rivets.	Number of Rivets in each flange.	
inches.	inches.	inches.	inches.	inches.		
$\frac{6}{2}$ 0	$3\frac{1}{2} \times 3\frac{1}{2} \times \frac{7}{20}$	$3 \times 3 \times \frac{7}{20}$	$3 \times 2\frac{1}{2} \times \frac{6}{20}$	3 4	5	
$\frac{6}{20}$	$3\frac{1}{2} \times 3\frac{1}{2} \times \frac{7}{20}$	$3\frac{1}{2} \times 3\frac{1}{2} \times \frac{7}{20}$	$3\times 2\frac{1}{2}\times \frac{7}{20}$	34	5	
6 2 0	$3\frac{1}{2} \times 3\frac{1}{2} \times \frac{7}{20}$	$3\frac{1}{2} \times 3\frac{1}{2} \times \frac{7}{20}$	$3 \times 3 \times \frac{7}{20}$	$\frac{3}{4}$	5	
$\frac{7}{20}$	$4 \times 4 \times \frac{8}{20}$	$3\frac{1}{2} \times 3\frac{1}{2} \times \frac{8}{20}$	$3 \times 3 \times \frac{7}{20}$	$\frac{3}{4}$	6	
$\frac{7}{20}$	$4 \times 4 \times \frac{9}{20}$	$3\frac{1}{2} \times 3\frac{1}{2} \times \frac{8}{20}$	$3 \times 3 \times \frac{7}{20}$	3 4	6	
$\frac{7}{20}$	$4 \times 4 \times \frac{9}{20}$	$3\frac{1}{2} \times 3\frac{1}{2} \times \frac{8}{20}$	$3\frac{1}{2} \times 3\frac{1}{2} \times \frac{7}{20}$	$\frac{3}{4}$	7	
$\frac{7}{20}$	$4 \times 4 \times \frac{9}{20}$	$3\frac{1}{2} \times 3\frac{1}{2} \times \frac{8}{20}$	$3\frac{1}{2} \times 3\frac{1}{2} \times \frac{7}{20}$	7/8	7	
8 20	$4 \times 4 \times \frac{9}{20}$	$4 \times 4 \times \frac{9}{20}$	$3\frac{1}{2} \times 3\frac{1}{2} \times \frac{9}{20}$	7 8	7	
8 20	$4 \times 4 \times \frac{9}{20}$	$4 \times 4 \times \frac{9}{20}$	$3\frac{1}{2} \times 3\frac{1}{2} \times \frac{8}{20}$	7/8	8	
9 to 8 2 0	$4 \times 4 \times \frac{10}{20}$	$4 \times 4 \times \frac{10}{20}$	$3\frac{1}{2} \times 3\frac{1}{2} \times \frac{9}{20}$	7 8	8	
$\frac{9 \operatorname{to} 8}{2 \overline{0}}$	$4 \times 4 \times \frac{10}{20}$	$4 \times 4 \times \frac{10}{20}$	$3\frac{1}{2} \times 3\frac{1}{2} \times \frac{1}{2}\frac{0}{0}$	$\frac{7}{8}$	9	
$\frac{9 \text{ to } 8}{2 \text{ 0}}$	$4 \times 4 \times \frac{10}{20}$	$4 \times 4 \times \frac{11}{20}$	$3\frac{1}{2} \times 3\frac{1}{2} \times \frac{10}{20}$	7/8	9	
$\frac{9 \text{ to } 8}{2 \text{ 0}}$	$4 \times 4 \times \frac{11}{20}$	$4 \times 4 \times \frac{11}{20}$	$3\frac{1}{2} \times 3\frac{1}{2} \times \frac{10}{20}$	78	10	
$\frac{10008}{20}$	$4 \times 4 \times \frac{12}{20}$	$4 \times 4 \times \frac{12}{20}$	$3\frac{1}{2} \times 3\frac{1}{2} \times \frac{10}{20}$	7/8	10	

(c) The depth of the Margin Plates may be 10 per cent. less than is required by the above Table when tiers of beams are fitted in accordance with Section 14, or when satisfactory arrangements of Gusset Plates or other efficient ties are fitted to the inner bottom and the bracket knees outside the Margin Plate.

Before the three-fifths length amidships the depth of the Margin Plate may be gradually reduced towards the fore end of the double bottom, where it may be 10 per cent. less than the midship depth. Abaft the three-fifths length, the depth of the Margin Plate may be gradually reduced towards the after end of the tank, where it may be 15 per

cent. less than the midship depth.

orms otice &c:

boa

orms otices, &c: board

STEEL VESSELS.

Showing	Diameters	and	Spacing	of	Rivets	a
---------	-----------	-----	---------	----	--------	---

	ins.	ins.	ins.	ins.	ins.	ins.	ins.
Thickness of Plates	$\frac{5}{20}$	$\frac{6}{20}$	$\frac{6}{20} \& \frac{7}{20}$	$\frac{7}{20}$	$\frac{8}{20}$	$\frac{9}{20}$	$\frac{9}{20} & \frac{10}{20}$
Diameter of RIVETS	5/8	5 8	3 4	$\frac{3}{4}$	34	$\frac{3}{4}$	$\frac{3}{4}$
Breadth of TREBLE riveted STRAPS in inches					$14\frac{1}{4}$	141	141
,, ,, Double ,, ,, ,,	8	8	$9\frac{3}{4}$	$9\frac{3}{4}$	$9\frac{3}{4}$	$9\frac{3}{4}$	$9\frac{3}{4}$
,, ,, TREBLE ,, BUTT LAPS ,,					$7\frac{1}{2}$	$7\frac{1}{2}$	$7\frac{1}{2}$
,, ,, Double ,, ,, ,,	$4\frac{1}{4}$	$4\frac{1}{4}$	5	5	5	5	. 5
,, ,, Double ,, Edge Laps ,,	$3\frac{3}{4}$	$3\frac{3}{4}$	$4\frac{1}{2}$	$4\frac{1}{2}$	$4\frac{1}{2}$	$4\frac{1}{2}$	$\frac{41}{2}$
,, ,, SINGLE ,, ,, ,,	$2\frac{1}{4}$	$2\frac{1}{4}$	$2\frac{1}{2}$	$2\frac{1}{2}$	$2\frac{1}{2}$		
MAXIMUM Spacing (In Butts of outside plating	$2\frac{1}{4}$	$2\frac{1}{4}$	$2\frac{5}{8}$	$2\frac{5}{8}$	$2\frac{5}{8}$	$2\frac{5}{8}$	$2\frac{5}{8}$
of Rivets from In Edges (forward and aft)		$2\frac{3}{4}$	$3\frac{3}{8}$.	$3\frac{3}{8}$	$3\frac{3}{8}$	$3\frac{3}{8}$	$3\frac{3}{8}$
centre to centre In Frames, Reversed Frames, Floors, Keelsons, and Beam Angles.		$4\frac{1}{2}$	$5\frac{1}{4}$	$5\frac{1}{4}$	$5\frac{1}{4}$	$5\frac{1}{4}$	$5\frac{1}{4}$

Minimum Number of Rivets in Edges of Plati

					0		
				NU	F RIVI		
DIAMETER OF RIVETS	ins. $\frac{5}{8}$	ins. 5. 8	ins. $\frac{3}{4}$				
Spacing of Frames20 ins	7	7	5	5	5	5	
,, ,, ,,		7	6	6	6	6	6
,, . ,,			6.	6	6	6	6
,, ,, ,,	.,.		6	6	6	6	6
,, ,, ,,24 ,,			7	7	7	7	7
,, ,, ,,							
,, ,, ,,							

Where the fore and aft flange of the frame does not exceed 3 inches, the rivets attaching the outside plating the should not exceed \$\frac{1}{8}\$ inch in diameter, and where it is \$3\frac{1}{2}\$ inches wide, they should not exceed 1 inch in diameter. RIVETS to be \$\frac{1}{4}\$ of an inch larger in diameter in the STEM, STERN FRAME, and KEEL, but in not

need these exceed 11 inches in diameter, and to be spaced 5 diameters apart.

RIVETS in SIDE PLATE RUDDERS to be of not less size than those required for the upper edge of garl strake amidships and be spaced not more than 5 diameters from centre to centre.

RIVETS connecting flat KEEL PLATES and the fore and aft ANGLES to be spaced not more the diameters apart.

Lloyd's Register of Shipping, 2, White Lion Court, Cornhill, London, E.C., 1st October, 1891.

readths of Straps, Lapped Butts and Edge Laps.	readths of	Straps,	Lapped	Butts	and	Edge	Laps.
--	------------	---------	--------	-------	-----	------	-------

18.	ins.	ins.	ins.	ins.	ins.	ins.	ins.	Size of Countersink for Rivets in Outside Plating.
1 0	$\frac{12}{20}$	$\frac{12}{20} & \frac{13}{20}$		$\frac{14}{20}$	$\frac{1}{2}\frac{4}{0}$ & $\frac{1}{2}\frac{5}{0}$	$\frac{15}{20}$	$\frac{16}{20}$	∠1″.¢>
8	$\frac{7}{8}$	7/8	7/8	1	1	1	1	Ins.
$6\frac{3}{4}$	$16\frac{3}{4}$	$16\frac{3}{4}$	$16\frac{3}{4}$	19	19	19	19	5 Rivet
$1\frac{1}{4}$	$11\frac{1}{4}$	$11\frac{1}{4}$	$11\frac{1}{4}$					<\frac{11\frac{1}{6}}{\display}
9	9	9	9	$10\frac{1}{2}$	$10\frac{1}{2}$	$10\frac{1}{2}$	$10\frac{1}{2}$	
6	6	6	6					$\langle1\frac{3}{16}$
$\frac{1}{4}$	$5\frac{1}{4}$	$5\frac{1}{4}$	$5\frac{1}{4}$	6	6	6	6	l · p·
								3 Rivet
$3\frac{1}{8}$	31/8	31/8	$3\frac{1}{8}$	$3\frac{1}{2}$	$3\frac{1}{2}$	$3\frac{1}{2}$	$3\frac{1}{2}$	<>
4	4	4	4	$\frac{41}{2}$	$4\frac{1}{2}$	$\frac{41}{2}$	$4\frac{1}{2}$	
$6\frac{1}{4}$	$6\frac{1}{4}$	$6\frac{1}{4}$	$6\frac{1}{4}$	7	7	7	7	
CHP COM								- 7 p:
be	twee	en Fr	ame	s A	MIDS	HIP	S.	7 Rivet
IN	EA	CH RO	W.					15"
ins. 7	ins. 7/8	ins. 7/8	ins. 7/8	ins.	ins.	ins.	ins.	
					-			1 Rivet
•••							•••	

RIVETS in the BUTTS of deck plating to be spaced 4 diameters, and in the edges 4 to $4\frac{1}{2}$ diameters apart.


RIVETS in the BUTTS and EDGES of inner bottom plating, and in butts of girders, to be spaced not more than 4 diameters apart.

11/8 Rivet

RIVETS in the LANDS and BUTTS of mast plates to be spaced 5 diameters apart.

...

orms otices &c:

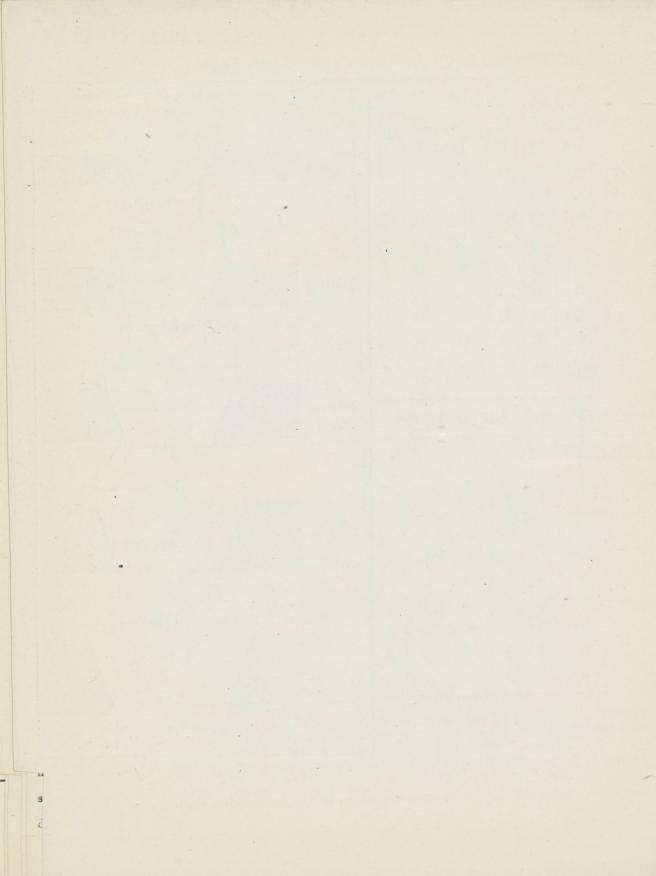

orms otices, &cc: board

									IRO	ON A	ND	STE	EL N	ASTS.	
EXTREME PARTNERS. HEEL.							I	HOUNDS		HEAD.			Sizes of An		
LEN	Ootnote).	Diam.	Thick	cness.	Diam.	Thic	Thickness.		Thickness.		Diam.	Thickness.		Ma	sts.
(Bee I	ooinote).		Iron.	Steel.		Iron.	Steel.	Diam.	Iron.	Steel.	Dis	Iron.	Steel.	Iron.	Steel.
	48	16 ins.	$\frac{5}{16}$	$\frac{6}{20}$	ins. 13	$\frac{4}{16}$	$\frac{5}{20}$	$\overset{\mathrm{ins.}}{13\frac{1}{2}}$	$\frac{4}{16}$	$\frac{5}{20}$	ins. 11	$\frac{3}{16}$	$\frac{3}{16}$	ins.	ins.
nd.	51	17	$\frac{5}{16}$	$\frac{6}{20}$	$13\frac{1}{2}$	$\frac{4}{16}$	$\frac{5}{20}$	14	4 · 16	$\frac{5}{20}$	$11\frac{1}{2}$	4 16	$\frac{5}{20}$		•••
Round.	54	18	$\frac{5}{16}$	$\frac{6}{20}$	14	16	$\frac{5}{20}$	15	$\frac{4}{16}$	$\frac{5}{20}$	12	$\frac{4}{16}$	$\frac{5}{20}$	•••	•••
the	57	19	6 16	$\frac{7}{20}$	15	$\frac{5}{16}$	$\frac{6}{20}$	$15\frac{1}{2}$	$\frac{5}{16}$	$\frac{6}{20}$	$12\frac{1}{2}$	$\frac{4}{16}$	$\frac{5}{20}$	•••	•••
s in	60	20	$\frac{6}{16}$	$\frac{7}{20}$	16	$\frac{5}{16}$	$\frac{6}{20}$	$16\frac{1}{2}$	$\frac{5}{16}$	$\frac{6}{20}$	$13\frac{1}{2}$	$\frac{5}{16}$	$\frac{6}{20}$	•••	•••
Plates	63	21	$\frac{6}{16}$	$\frac{7}{20}$	$16\frac{1}{2}$	$\frac{5}{16}$	$\frac{6}{20}$	$17\frac{1}{2}$	$\frac{5}{16}$	$\frac{6}{20}$	14	$\frac{5}{16}$	$\frac{6}{20}$	•••	
Two 1	66	22	$\frac{6}{16}$	$\frac{7}{20}$	17	$\frac{5}{16}$	$\frac{6}{20}$	$18\frac{1}{2}$	$\frac{5}{16}$	$\frac{6}{20}$	$14\frac{1}{2}$	$\frac{5}{16}$	$\frac{6}{20}$	•••	•••
T_i	69	23	$\frac{6}{16}$	$\frac{7}{20}$	18	$\frac{5}{16}$	$\frac{6}{20}$	19	$\frac{5}{16}$	$\frac{6}{20}$	$15\frac{1}{2}$	$\frac{5}{16}$	$\frac{6}{20}$	•••	
	72	24	$\frac{6}{16}$	$\frac{7}{20}$	19	$\frac{5}{16}$	$\frac{6}{20}$	20	$\frac{5}{16}$	$\frac{6}{20}$	16	$\frac{5}{16}$	$\frac{6}{20}$	•••	
1.	75	25	$\frac{7}{16}$	$\frac{8}{20}$	$19\frac{1}{2}$	$\frac{6}{16}$	$\frac{7}{20}$	21	$\frac{6}{16}$	$\frac{7}{20}$	$16\frac{1}{2}$	<u>6</u> 16	$\frac{7}{20}$		•••
Round.	78	26	$\frac{7}{16}$	$\frac{8}{20}$	20	$\frac{6}{16}$	$\frac{7}{20}$	$21\frac{1}{2}$	$\frac{6}{16}$	$\frac{7}{20}$	$17\frac{1}{2}$	$\frac{6}{16}$	$\frac{7}{20}$	•••	•••
the H	81	27	$\frac{8}{16}$	$\frac{9}{20}$	21	$\frac{6}{16}$	$\frac{7}{20}$	$22\frac{1}{2}$	$\frac{6}{16}$	$\frac{7}{20}$	18	$\frac{6}{16}$	$\frac{7}{20}$	•••	
in t	84	28	$\frac{8}{16}$	$\frac{9}{20}$	22	$\frac{6}{16}$	$\frac{7}{20}$	23	$\frac{6}{16}$	$\frac{7}{20}$	$18\frac{1}{2}$	$\frac{6}{16}$	$\frac{7}{20}$	$3\frac{1}{2} \times 3 \times \frac{7}{16}$	
Plates	87	29	8 16	20	$22\frac{1}{2}$	$\frac{6}{16}$	$\frac{7}{20}$	24	6 16	$\frac{7}{20}$	$19\frac{1}{2}$		7 2 0	$4 \times 3 \times \frac{7}{16}$	
	90	30	8 16	$\frac{9}{20}$	23	$\frac{7}{16}$	$\frac{8}{20}$	25	$\frac{7}{16}$	$\frac{8}{20}$	20	$\frac{6}{16}$	$\frac{7}{20}$	$4 \times 3 \times \frac{8}{16}$	
Three	93	31	$\frac{9}{16}$	$\frac{10}{20}$	24	$\frac{7}{16}$	$\frac{8}{20}$	26	$\frac{7}{16}$	$\frac{8}{20}$	$20\frac{1}{2}$		$\frac{7}{20}$	$4\frac{1}{2} \times 3 \times \frac{8}{16}$	$4\frac{1}{2} \times 3 \times \frac{9}{20}$
1	96	32	$\frac{9}{16}$.	$\frac{1}{2}\frac{0}{0}$	25	$\frac{7}{16}$	$\frac{8}{20}$	$26\frac{1}{2}$	$\frac{7}{16}$	$\frac{8}{20}$	21	$\frac{6}{16}$	$\frac{7}{20}$	$5 \times 3 \times \frac{8}{16}$	$5 \times 3 \times \frac{9}{20}$

FOOTNOTE.—The length for regulating the scantlings of the mast

RULES FOR THE CONSTRUCTION OF IRON

1. If Iron be used in the construction of masts, bowsprits, and yards, it is to be of good malleable quality quite free from surface or other defects, and to stand a tensile strain of 20 tons to the square inch and the following bending tests when cold without fracture:—

THICKNESS	TO BEND COL AN AN	
OF PLATES	With the Grain.	Across the Grain.
9	25°	8°
8 16	30°	11°
7	37°	13°
16	47°	15°
16	55°	17°
4	CEO	000

70°

25°

16

16

- 2. The plates to be bent over a slab, the corner of which should be rounded with a radius of half an inch.
- 3. If Steel be adopted it is to be of the quality required for ship plates and subjected to the same tests.
- 4. Lower Masts.—The plating to be of the thickness, and the plates arranged as in the Table. The seams to be double riveted; in masts of less length than 84 feet, the edges may be single riveted provided angle bars be fitted to the satisfaction of the Committee. The butts below the mast partners in masts, and those inside the wedging of bowsprits, might be double riveted, the remainder should be treble riveted.
- 5. The buttstraps in all cases should be $\frac{1}{16}$ of an inch thicker than the plates they connect, in iron masts; in steel masts the buttstraps should be $\frac{1}{20}$ of an inch thicker than the plates in double riveted butts and $\frac{2}{20}$ thicker in treble riveted butts. The buttstraps would be better to be fitted on the outside of the masts and bowsprit.
- 6. The mast and bowsprit plates should be doubled all round in way of the wedging, or otherwise efficiently strengthened; where masts are wedged at the lower deck, the doubling should extend from below the lower deck to above the upper deck.
- 7. The heels of all masts and their steps should be efficiently strengthened. The cheeks of masts should be stiffened by angles or cope iron on their foremost edges; or by some other approved plan.
- 8. Where two plates in the round are adopted instead of three, the iron is to be of such superior quality as to admit of its being bent to the required form, without being unduly heated and without fracture, and in all such cases the masts should be additionally stiffened by 3 angles as provided for in the Tables.

			1			IB	ON	ANI	STI	EEL	BOWSPRITS	
	CHEEKS.			世日 BED.		D.	HEEL.		C	AP.	Circs of A	ingle Bar.
'kn'ss Plate.	Sizes of A	ngle Bar.		LENGTH OUTSIDE BED.	i i	g Th'kn'ss		Th'kn'	Diam.	Th'kn's		ingle bar.
stl.	Iron.	Steel		LE	Diam.	Irn. Stl.	Diam.	Irn. St	1. Ä	Irn. Stl	. Iron.	Steel.
s. ins. 8	$3\frac{1}{2} \times 2\frac{1}{2} \times \frac{6}{16}$	$3\frac{1}{2} \times 2\frac{1}{2}$	$\times \frac{7}{20}$	Ft. 14		ins. $\frac{5}{16}$ $\frac{6}{20}$	ins. 14	$\begin{array}{c c} \text{ins. in} \\ 5 \\ \hline 16 \end{array}$		$\begin{array}{c c} \text{ins.} & \text{ins.} \\ \hline 4 & 5 \\ \hline 1 & 6 & 2 & 0 \end{array}$		$2\frac{1}{2} \times 2^{\text{ins.}} \times \frac{6}{20}$
$\frac{8}{620}$	$3\frac{1}{2} \times 3 \times \frac{6}{16}$	$3\frac{1}{2} \times 3$	$\times \frac{.7}{20}$	15	$17\frac{1}{2}$	$\begin{array}{c c} 5 & 6 \\ \hline 1 & 6 & 2 & 0 \end{array}$	15	5 6	$\frac{1}{0}$ $12\frac{1}{2}$	$\frac{5}{16}$ $\frac{6}{2}$		$2\frac{1}{2} \times 2 \times \frac{6}{20}$
	$3\frac{1}{2} \times 3 \times \frac{6}{16}$		$\times \frac{7}{20}$	16	19	$\begin{array}{c c} 5 & \underline{6} \\ \hline 2 & 0 \end{array}$	16	$\begin{array}{ c c c }\hline 5 & \underline{6} \\ \hline 1 & 6 & \underline{2} \\ \hline \end{array}$	13	$\begin{array}{c c} 5 & 6 \\ \hline 16 & \overline{2} & \end{array}$	-	$3 \times 2 \times \frac{6}{20}$
	$4 \times 3 \times \frac{7}{16}$			17	20	$\begin{array}{c c} 6 & 7 \\ \hline 16 & 20 \end{array}$	17	$\begin{vmatrix} \frac{6}{16} \end{vmatrix} \frac{7}{2}$	14	$\begin{array}{c c} 5 & 6 \\ \hline 16 & 2 \end{array}$		$3 \times 2 \times \frac{6}{20}$
_	$4 \times 3 \times \frac{7}{16}$			18	$21\frac{1}{2}$	$\begin{array}{c c} 6 & 7 \\ \hline 1 & 6 & 2 & 0 \end{array}$	18	$\frac{6}{16}$	$\frac{15}{0}$	$\begin{array}{c c} 5 & 6 \\ \hline 1 & 6 & 2 \end{array}$	/	$3 \times 2\frac{1}{2} \times \frac{6}{20}$
	$4 \times 3 \times \frac{7}{16}$		$\times \frac{8}{20}$	19	23	$\begin{array}{c c} 6 & 7 \\ \hline 16 & 20 \end{array}$	19	$\frac{6}{16}$	$\frac{16}{0}$	$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	-	$3 \times 3 \times \frac{7}{20}$
	$4\frac{1}{2} \times 3 \times \frac{7}{16}$		$\times \frac{8}{20}$	20	$24\frac{1}{2}$	$\begin{array}{c c} 7 & 8 \\ \hline 16 & 20 \end{array}$	-	$\frac{6}{16}$	$\frac{16}{0}$	$\begin{array}{c c} 1 & 6 & 7 \\ \hline 2 & 1 & 6 & 2 \end{array}$	-	$3\frac{1}{2} \times 3 \times \frac{7}{20}$
_	$4\frac{1}{2} \times 3 \times \frac{8}{16}$		$\times \frac{9}{20}$	21	$25\frac{1}{2}$	$\frac{7}{16}$ $\frac{8}{20}$	21	6 2	$\frac{1}{0}$ 17	$\begin{bmatrix} 1 & 6 & 7 \\ 2 & 1 & 6 \end{bmatrix}$	_	$3\frac{1}{2} \times 3 \times \frac{7}{20}$
_	$4\frac{1}{2} \times 3 \times \frac{8}{16}$		$\times \frac{9}{20}$	22	$26\frac{1}{2}$	$\begin{array}{c c} 7 & 8 \\ \hline 1 & 6 & 2 & 0 \end{array}$	-	$\frac{6}{16}$	18	$\begin{array}{c c} 1 & 6 & 7 \\ \hline 2 & 1 & 6 & 2 \end{array}$	_	$4 \times 3 \times \frac{8}{20}$
_	$5 \times 3 \times \frac{8}{16}$			23	28	$\begin{array}{c c} 8 & 9 \\ \hline 16 & 20 \end{array}$	-	$\left \frac{7}{16} \right \frac{2}{2}$		$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	_	$4 \times 3\frac{1}{2} \times \frac{8}{20}$
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$			$\times \frac{10}{20}$	24	29	$\begin{array}{ c c c c c }\hline 8 & 9 \\\hline 1 & 6 \\\hline \end{array}$	-	$\frac{7}{16}$		$\begin{vmatrix} \frac{6}{16} & \frac{7}{26} \end{vmatrix}$	-	$4 \times 3\frac{1}{2} \times \frac{8}{20}$
$\frac{1}{6} = \frac{1}{2} = 0$	-			25	30	$\begin{array}{ c c c c c }\hline 8 & 9 \\\hline 1 & 6 & 2 & 0\\\hline \end{array}$	-	$\frac{7}{16}$	_	$\begin{array}{ c c c c c c c c c c c c c c c c c c c$		$\frac{4\frac{1}{2} \times 3\frac{1}{2} \times \frac{9}{20}}{412}$
$\frac{0}{6}$ $\frac{1}{2}$ $\frac{1}{0}$				-	$\frac{31\frac{1}{2}}{31}$			$\frac{7}{16}$				$\frac{4\frac{1}{2} \times 3\frac{1}{2} \times \frac{9}{20}}{41}$
	$\frac{5\frac{1}{2} \times 4}{3} \times \frac{10}{16}$	-		27	33	$\begin{array}{ c c c c c }\hline 8 & 9 \\\hline 1 & 6 \\\hline \end{array}$	27	$\frac{7}{16}$	$\frac{8}{0}$ 22	$\frac{6}{16}$ $\frac{7}{20}$	$\frac{4\frac{1}{2} \times 3\frac{1}{2} \times \frac{8}{16}}{2}$	$4\frac{1}{2} \times 3\frac{1}{2} \times \frac{9}{20}$
$\begin{array}{c c} 0 & 1 & 1 \\ \hline 2 & 0 \\ \end{array}$										-		
1 1 2 0												
$\frac{1}{6}$ $\frac{1}{2}$ $\frac{2}{6}$	$6 \times 4 \times \frac{10}{16}$	6 ×4	$\times \frac{1}{2} \frac{1}{0}$									

o be taken, in all cases, from the cap to the top of the keelson.

AND STEEL MASTS, BOWSPRITS, AND YARDS.

- 9. All masts of 84 feet length and above, to be fitted with angles properly shifted and extending the whole length of the mast. The plates be arranged as described in the Tables, there should be an angle bar fitted to each plate in the round, of the size given the Table.
- 10. All bowsprits exceeding 28 inches in diameter should have a vertical diaphragm plate extending from within the wedging the gammoning, connected by continuous single angle bars to the upper and lower parts of the bowsprit, and two additional angle are of the size given in the Table; and bowsprits 28 inches in diameter and under, to have an angle bar at the centre of each plate stending the whole length of the bowsprit.
- 11. The diameter of the lower masts at the cap to be in no case less than that of the topmast at this place, or of the lower opsail yard.
- 12. The attention of the Surveyors is to be specially directed to the fittings connected with the masts and rigging, in order to usure the workmanship, material, and sizes of the same being efficient.
- 13. The mizenmasts for barques may be reduced one-fifth in diameter from that given in the Table, and the plating to be not less than the thickness corresponding to the diameters.
- 14. Where a Steamer is intended to be fitted with masts or a bowsprit for auxiliary purposes, they may be one-eighth less in immeter than prescribed by Table; and when a mast of a steamer is to carry fore and aft sail only, the diameter may be one-fifth ess than given in the Table. The seams of these masts may be single riveted.
- 15. When pole masts are fitted, the length of the lower mast, in determining the diameter and thickness of plating, should be aken from the heel to the cap band, so as to include the head, as in an ordinary mast; and in sailing vessels these masts to be additionally strengthened by angles from below the lower yard to the topmast cap, or compensating strength furnished. The cheek clates in pole masts may be of the same thickness as the mast plates at the hounds.
 - 16. The eye-bolts, hoops, cleats and bands, are to be of the best description of wrought iron.
 - 17. Any deviations from these Rules and Tables must be submitted for the consideration of the Committee.

Sizes and Scantlings for YARDS and TOPMASTS of SAILING VESSEL

-							_									_	
1							YA	RDS									
-			Dentre.		First	t Quart	ter.	Secon	nd Quar	rter.	Thir	d Quar	Ends at Cleats.				
	Length Cleated.	eter.	Thick	rness.	Diameter.	Thick	rness.	Thickness.			eter.	Thick	kness.	ness.		Thickness	
		Diameter.	Iron.	Steel.	Diam	Iron.	Steel.	Diameter.	Iron.	Steel.	Diameter.	Iron.	Steel.	Diameter.	Iron.	Ste	
	Feet.	Ins.	Ins. 3 16	Ins. $\frac{3}{16}$	Ins. $7\frac{7}{8}$	Ins. 3 16	Ins. 3 1 6	$7_{\frac{1}{4}}^{\text{Ins.}}$	Ins. $\frac{3}{16}$	Ins. 3 1 6	Ins. 6	Ins. 3 1 6	Ins. 3 1 6	Ins. 4	Ins. 2 16	In 2	
	36	9	$\frac{3}{16}$	$\frac{3}{16}$	83/4	$\frac{3}{16}$	$\frac{3}{16}$	81/8	3 1 6	$\frac{3}{16}$	$6\frac{3}{4}$	3 16	$\frac{3}{16}$	41	2 16	1	
1	40	10	3 16	3 16	$9\frac{3}{4}$	$\frac{3}{16}$	$\frac{3}{16}$	9	3	3 16	$7\frac{1}{2}$	3 16	$\frac{3}{16}$	5	$\frac{2}{16}$	1	
1	44	11	$\frac{3}{16}$	$\frac{3}{16}$	$10\frac{3}{4}$	$\frac{3}{16}$	$\frac{3}{16}$	10	$\frac{3}{16}$	$\frac{3}{16}$	81/4	3 16	3	$5\frac{1}{2}$	$\frac{2}{16}$	1	
1	48	12	$\frac{4}{16}$	$\frac{5}{20}$	$11\frac{3}{4}$	$\frac{4}{16}$	$\frac{5}{20}$	$10\frac{3}{4}$	$\frac{3}{16}$	1 6	9	3 16	3 16	6	$\frac{2}{16}$	12	
1	52	13	$\frac{4}{16}$	$\frac{5}{20}$	$12\frac{5}{8}$	$\frac{4}{16}$	$\frac{5}{20}$	$11\frac{3}{4}$	3 16	$\frac{3}{16}$	$9\frac{3}{4}$	$\frac{3}{16}$	3 16	$6\frac{1}{2}$	$\frac{2}{16}$	1	
1	56	14	4 16	$\frac{5}{20}$	$13\frac{5}{8}$	4 16	$\frac{5}{20}$	$12\frac{5}{8}$	16	$\frac{5}{20}$	$10\frac{1}{2}$	$\frac{3}{16}$	$\frac{3}{16}$	7	$\frac{2}{16}$	12	
-	60	15	4 16	$\frac{5}{20}$	$14\frac{5}{8}$	$\frac{4}{16}$	$\frac{5}{20}$	$13\frac{1}{2}$	4 16	$\frac{5}{20}$	$11\frac{1}{4}$	$\frac{3}{16}$	$\frac{3}{16}$	$7\frac{1}{2}$	$\frac{2}{16}$	1	
	64	16	5 16	$\frac{6}{20}$	$15\frac{5}{8}$	$\frac{5}{16}$	$\frac{6}{20}$	$14\frac{3}{8}$	5 16	$\frac{6}{20}$	12	4 16	5 2 0	8	3 16	3	
	68	17	<u>5</u> 16	$\frac{6}{20}$	$16\frac{1}{2}$	<u>5</u> 16	$\frac{6}{20}$	$15\frac{1}{4}$	$\frac{5}{16}$	$\frac{6}{20}$	$12\frac{3}{4}$	4 16	$\frac{5}{20}$	81/2	3 16	1	
	72	18	$1\frac{5}{6}$	$\frac{6}{20}$	$17\frac{1}{2}$	$\frac{5}{16}$	$\frac{6}{20}$	$16\frac{1}{4}$	5 16	$\frac{6}{20}$	$13\frac{1}{2}$	$\frac{4}{16}$	$\frac{5}{20}$	9	3 16	3	
	76	19.	6 16	$\frac{7}{20}$	$18\frac{1}{2}$	$\frac{5}{16}$	$\frac{6}{20}$	$17\frac{1}{8}$	5 16	$\frac{6}{20}$	141	$\frac{4}{16}$	$\frac{5}{20}$	$9\frac{1}{2}$	36	1	
1	80	20	$\frac{6}{16}$	$\frac{7}{20}$	$19\frac{1}{2}$	$\frac{5}{16}$	$\frac{6}{20}$	18	5 16	$\frac{6}{20}$	15	1 6	$\frac{5}{20}$	10	3 16	3	
	84	21	7.	8 2 0	$20\frac{1}{2}$	6 16	$\frac{7}{20}$	19	5 16	$\frac{6}{20}$	$15\frac{3}{4}$	5 16	$\frac{6}{20}$	$10\frac{1}{2}$	4 16	25	
1	88	22	7 16	8 20	$21\frac{1}{2}$	$\frac{6}{16}$	$\frac{7}{20}$	$19\frac{3}{4}$	5 16	$\frac{6}{20}$	$16\frac{1}{2}$	<u>5</u> 16	$\frac{6}{20}$	11	4 16	2	
1	92	23	7 16	$\frac{8}{20}$	$22\frac{1}{2}$	6 16	$\frac{7}{20}$	$20\frac{3}{4}$	6 16	$\frac{7}{20}$	$17\frac{1}{4}$	1 6	$\frac{6}{20}$	$11\frac{1}{2}$	4 16	5	
1	96	24	7	8 20	$23\frac{3}{8}$	$\frac{6}{16}$	$\frac{7}{20}$	$21\frac{5}{8}$	$\frac{6}{16}$	$\frac{7}{20}$	18	5 16	$\frac{6}{20}$	12	$\frac{4}{16}$	2	

Lloyd's Register of British and Foreign Shipping, 2, White Lion Court, Cornhil

TOPMASTS. Lower Part Head. Heel. of Head Length. Thickness Thickness. Diameter. Thickness. Dlameter Iron. Steel. Iron. Steel. Iron. Steel. Feet. Ins. Ins. Ins. Ins. Ins. Ins. Ins. Ins. Ins. 9 32 12 101 $\frac{4}{16}$ $\frac{5}{20}$ $\frac{5}{20}$ $\frac{3}{16}$ $\frac{3}{16}$ 16 $\frac{3}{16}$ 34 91 123 $\frac{5}{20}$ 11 $\frac{4}{16}$ $\frac{5}{20}$ $\frac{3}{16}$ $\frac{4}{16}$ 36 $\frac{5}{20}$ 10 13 $\frac{4}{16}$ 111 $\frac{4}{16}$ $\frac{3}{11}$ $\frac{3}{16}$ $\frac{5}{20}$ 38 $12\frac{1}{2}$ $\frac{4}{16}$ $\frac{5}{20}$ $10\frac{1}{5}$ $\frac{3}{16}$ $\frac{3}{16}$ 14 $\frac{5}{20}$ 40 $\frac{4}{16}$ $\frac{5}{20}$ 11 3 16 $\frac{3}{16}$ 143 $\frac{4}{16}$ $\frac{5}{20}$ 13 42 $\frac{4}{16}$ $11\frac{1}{2}$ $\frac{4}{16}$ 15 $\frac{6}{20}$ $13\frac{1}{2}$ $\frac{5}{20}$ $\frac{5}{16}$ $\frac{5}{20}$ 44 12 16 $\frac{4}{16}$ $\frac{5}{20}$ $\frac{5}{16}$ $\frac{6}{20}$ 14 $\frac{5}{20}$ $\frac{4}{16}$ 46 $\frac{6}{20}$ $\frac{4}{16}$ $12\frac{1}{2}$ 16 $\frac{5}{20}$ 163 $\frac{5}{16}$ $14\frac{1}{2}$ $\frac{5}{20}$ 13 48 $\frac{5}{16}$ $\frac{6}{20}$ $\frac{6}{20}$ 17 15 $\frac{7}{20}$ 50 18 $13\frac{1}{2}$ $\frac{5}{16}$ 16 $\frac{6}{20}$ $\frac{5}{1.6}$ $\frac{6}{20}$ $\frac{7}{20}$ 52 181 $\frac{7}{20}$ 161 $\frac{5}{16}$ 14 $\frac{5}{16}$ $\frac{6}{20}$ $\frac{6}{20}$ 54 19 17 $\frac{6}{20}$ 141 $\frac{5}{16}$ $\frac{6}{20}$ $\frac{5}{16}$ $\frac{7}{20}$ 20 $\frac{6}{20}$ 15 56 18 $\frac{5}{16}$ $\frac{5}{16}$ $\frac{6}{20}$ $\frac{7}{20}$ 58 201 $\frac{5}{16}$ $15\frac{1}{2}$ $\frac{7}{20}$ $18\frac{1}{3}$ $\frac{6}{20}$ $\frac{5}{1.6}$ $\frac{6}{20}$ 60 21 $\frac{6}{20}$ 16 19 $\frac{5}{16}$ $\frac{6}{20}$ $\frac{7}{20}$ $\frac{5}{1.6}$ 62 22 20 $\frac{7}{20}$ $\frac{6}{20}$ $16\frac{1}{9}$ $\frac{6}{20}$ $\frac{5}{16}$ 64 23 21 20 16 $\frac{6}{20}$ 17 $\frac{7}{20}$ $\frac{5}{16}$

TOPMASTS .- The plating should be of the thickness given in the The seams of topmasts may be single riveted; the buttsshould be treble riveted, and their straps 1 of an inch thicker in iron topmasts, and 1/20 thicker in steel than the plates they connect. There should be doubling plates in the way of the lower mastcap. Topmasts should be efficiently strengthened in the way of the fid holes, and in the way of sheaveholes where such are cut, by the doubling plates, iron hoops, or by other approved methods.

Topmast 38 feet in length and under 46 feet, to have two stiffening angles $3'' \times 2\frac{1}{2}'' \times \frac{6}{16}''$ fitted as nearly as practicable at the fore and after parts of the mast.

Where the length is 46 feet and under 66 feet, the angles to be $3\frac{1}{2}'' \times 3\frac{1}{2}'' \times \frac{6}{16}''$.

When the length of the topmasts exceeds 46 feet, efficient cheek plates are to be fitted to the same.

The diameter of the topmasts at the lower cap, sheave hole, and topmast cap, to be in no case less than that of the yards at these places.

LOWER YARDS.—The plating should be of the thickness given in the Table. The seams of yards may be single riveted; their butts should be treble riveted, and connected by being overlapped, or by efficient butt straps. The plates should be doubled at the centre, and the doubling plates should extend beyond the truss hoops.

Where iron or steel masts and yards are to be constructed otherwise than in accordance with the Tables, plans and particulars of the same must be submitted for the approval of the Committee.

Where Steamers are intended to be fitted with topmasts for auxiliary purposes, they might be one-eighth less in diameter than prescribed by Table.



					,		
REGISTER TONNAGE UNDER DECK.	Tons. 3000 AND UNDER 3500	Tons. 2600 AND UNDER 3000	Tons. 2300 AND UNDER 2600	Tons. 2000 AND UNDER 2300	Tons. 1800 AND UNDER 2000	Tons. 1600 AND UNDER 1800	Tons. 1400 AND UNDER 1600
PLATING NUMBER.	32000 AND UNDER 36000	29000 AND UNDER 32000	26600 AND UNDER 29000	24200 AND UNDER 26600	22500 AND UNDER 24200	20700 AND UNDER 22500	18800 AND UNDER 20700
FORE & MAIN Shrouds	No. Size. inches. 6 $5\frac{1}{2}$ and 2 cap	No. Size. inches. 6 $5\frac{1}{4}$ and 2 cap	No. Size. inches. 6 5	No. Size. inches. 6 $4\frac{7}{8}$ and cap	No. Size. inches. 6 $4\frac{3}{4}$ and cap	No. Size. inches. 6 $4\frac{1}{2}$ and cap	No. Size. inches 6 $4\frac{1}{4}$ and cap
", ", Chain plates …	$2\frac{3}{4}$	$2\frac{5}{8}$	$2\frac{1}{2}$	$2\frac{3}{8}$	$2\frac{1}{4}$	$2\frac{1}{8}$	2
" " Dead-eyes …		_	_	_	12×7	$11\frac{1}{2} \times 6\frac{1}{2}$	11×
,, ,, Lanyards (hemp)	_	_		_	6	$5\frac{3}{4}$	$5\frac{1}{2}$
,, (Rigging Screws) Diameter at bottom of thread)	$2\frac{1}{4}$	$2\frac{1}{8}$	2	$1\frac{7}{8}$	$1\frac{7}{8}$	$1\frac{3}{4}$	$1\frac{3}{4}$
" (Rigging Screws) " (Diameter of Pins)	2	$1\frac{7}{8}$	$1\frac{3}{4}$	$1\frac{5}{8}$	$.1\frac{5}{8}$	$1\frac{1}{2}$	$1\frac{1}{2}$
,, ,, Topmst. bekstys.	$3 5\frac{1}{2}$	$3 5\frac{1}{4}$	3 5	$3 \ 4\frac{7}{8}$	$3 \ 4\frac{3}{4}$	$3 4\frac{1}{2}$	3 41
", ", Top-gllt. bckstys.	$2 4\frac{1}{4}$	$2 4\frac{1}{8}$	2 37	$2 \ 3\frac{3}{4}$	$2 3\frac{1}{2}$	$2 3\frac{1}{4}$	2 3
", ", Lower stays …	$2 5\frac{1}{2}$	$2 \cdot 5\frac{1}{4}$	2 5	2 47	$2 4\frac{3}{4}$	$2 4\frac{1}{2}$	2 41/4
", ", Top-mast stays	$2 5\frac{1}{2}$	$2 5\frac{1}{4}$	2 5	2 47	$2 4\frac{3}{4}$	$2 4\frac{1}{2}$	2 41/4
" " Top-gallant stays	41/4	41/8	$3\frac{7}{8}$	$3\frac{3}{4}$	$3\frac{1}{2}$	$3\frac{1}{4}$	3
Mizen Shrouds	$5 4\frac{1}{2}$	$5 4\frac{3}{8}$	$5 4\frac{1}{4}$	$5 4\frac{1}{8}$	5 4	$5 3\frac{3}{4}$	$5 \ 3\frac{1}{2}$
" Topmast backstays …	$\frac{\text{and cap}}{3}$ $4\frac{1}{2}$	$\frac{1}{3}$ $\frac{1}{48}$	$\frac{1}{3}$ and cap $\frac{1}{4}$	3 41/8	3 4	$\frac{1}{3}$ $\frac{3}{4}$	$\frac{\text{and cap}}{3}$ $3\frac{1}{2}$
,, Top-gallant backstays	$2 3\frac{1}{4}$	$2 3\frac{1}{8}$	2 3	$2 \ 2\frac{7}{8}$	$2 \ 2\frac{3}{4}$	$2 2\frac{1}{2}$	$2 2\frac{1}{4}$
,, Lower stays	$2 4\frac{1}{2}$	$2 4\frac{3}{8}$	$2 4\frac{1}{4}$	$2 4\frac{1}{8}$	2 4	$2 3\frac{3}{4}$	$2 \ 3\frac{1}{2}$
,, Topmast stays	$2 4\frac{1}{2}$	$2 4\frac{3}{8}$	$2 4\frac{1}{4}$	$2 4\frac{1}{8}$	2 4	$2 3\frac{3}{4}$	$2 3\frac{1}{2}$
" Top-gallant stays …	31	$3\frac{1}{8}$	3	$2\frac{7}{8}$	$2\frac{3}{4}$	$2\frac{1}{2}$	$2\frac{1}{4}$
Bobstay Bar	41/8	41/8	4	$3\frac{7}{8}$	$3\frac{3}{4}$	35	31
" Pin	$3\frac{1}{8}$	$3\frac{1}{8}$	3	$2\frac{7}{8}$	$2\frac{3}{4}$	$2\frac{5}{8}$	$2\frac{1}{2}$
,, Chain	$2\frac{1}{16}$	$2\frac{1}{16}$	2	$1\frac{15}{16}$	$1\frac{14}{16}$	$1\frac{1}{1}\frac{3}{6}$	11
Bowsprit Shrouds (Chain)	0 11	$2 1\frac{1}{8}$	$2 \ 1_{16}$	$2 1_{16}$	2 1	2 1	$2 \frac{7}{8}$

^{1.—}The above requirements are intended to apply to vessels in which the dimensions of the masts and yards as such as would not be deemed unusual for vessels of the respective tonnages; where these dimensions are extreme, or in other exceptional cases where deviations from the above sizes are required, rigging plans showing the sizes an arrangements of the several parts should be submitted for the approval of the Committee.

^{2.—}Where four masts are adopted instead of three, the tonnage of the vessel may be reduced one-fifth, an where five masts are adopted, one fourth, in obtaining the sizes of Rigging, &c., from the above table.

^{3.—}Where pole masts are adopted in vessels requiring one cap shroud only, an additional cap shroud is to lifted, when the number of lower shrouds may be correspondingly reduced.

^{4.—}Where double top-gallant yards are to be adopted, a topmast cap backstay should be fitted in addition.

						-		-	-	-		_		-						
AND	ons. 200 UNDER	AND	ons. 000 UNDER	AND	ons. 00 UNDER	AND	Cons. 200 UNDER 300	AND	Cons. 300 UNDER	ANI	Fons. 500 UNDER 600	4 AND	Cons. 000 UNDER	AND	Cons. BOO UNDER			TEEL		
AND	800 UNDER 800	AND	800 UNDER 800	AND	700 UNDER 800	AND	600 UNDER 700	AND	300 UNDER 600	AND	0000 UNDER 0300	AND	700 UNDER 000	AND	100 UNDER 700		SIZE.	BREAK- ING TEST.	SIZE.	BREAK- ING TEST.
No.	Size. inches. $4\frac{1}{8}$	No. 6 and ca	Size. inches.	No. 5 and cap	Size. inches. $3\frac{3}{4}$	No. 5 and ca	Size. inches. $3\frac{1}{2}$	No. 5 and ca	Size. inches. $3\frac{1}{4}$	No. 5	Size. inches.	No. 4	Size. inches. $2\frac{3}{4}$	No. 4	Size. inches. $2\frac{1}{2}$		Inches. $5\frac{1}{2}$	Tons. 58	Inches. $3\frac{1}{8}$	Tons. 171/2
	$1\frac{7}{8}$ $0\frac{1}{2} \times 6$		$1\frac{7}{8}$ 0×6		$1rac{3}{4} imes 5rac{1}{2}$		$1\frac{3}{4} \times 5\frac{1}{2}$		$1\frac{5}{8}$ $\frac{1}{2} \times 5$		$\frac{1\frac{3}{8}}{8 \times 5}$	$7\frac{1}{3}$	$1\frac{1}{4} \times 4\frac{1}{2}$	7	$1\frac{1}{4} \times 4\frac{1}{2}$		$5\frac{1}{4}$	53	3	16
	$5\frac{1}{4}$		5		$\frac{4_3}{4}$		$4\frac{1}{2}$		41/4		4	2	$3\frac{3}{4}$		$3\frac{1}{2}$		5	48	$2\frac{7}{8}$	$14\frac{1}{2}$
	$1\frac{5}{8}$		$1\frac{5}{8}$		$1\frac{1}{2}$		$1\frac{1}{2}$		$1\frac{3}{8}$		11		$1\frac{1}{8}$		$1\frac{1}{8}$		$4\frac{7}{8}$	44	$2\frac{3}{4}$	13
																	43	42	$2\frac{5}{8}$	12
	$1\frac{3}{8}$		$1\frac{3}{8}$		$1\frac{3}{8}$		$1\frac{3}{8}$		$1\frac{1}{4}$		$1\frac{1}{8}$		1		1		$\frac{45}{8}$	40	$2\frac{1}{2}$	11
3	$4\frac{1}{8}$	3	4	2	$3\frac{3}{4}$	2	$3\frac{1}{2}$	2	$3\frac{1}{4}$	2	3	2	$2\frac{3}{4}$	2	$2\frac{1}{2}$		$4\frac{1}{2}$	38	$2\frac{3}{8}$	10
2	$2\frac{3}{4}$	2	$2\frac{5}{8}$	2	$2\frac{1}{2}$		$2\frac{3}{8}$		$2\frac{1}{4}$		$2\frac{1}{8}$		2		$1\frac{3}{4}$		$\frac{43}{8}$	36	$2\frac{1}{4}$	9
2	$\frac{41}{8}$	2	4	2	$\frac{3\frac{3}{4}}{3\frac{3}{4}}$	2	$3\frac{1}{2}$	2	$3\frac{1}{4}$	2	3	2	$2\frac{3}{4}$	2	$2\frac{1}{2}$		$4\frac{1}{4}$	34	$2\frac{1}{8}$	8
2	$4\frac{1}{8}$ $2\frac{3}{4}$	2	4	2	$\frac{3\frac{3}{4}}{21}$	2	$\frac{3\frac{1}{2}}{23}$		$\frac{3\frac{1}{4}}{21}$		3		$\frac{2\frac{3}{4}}{2}$		$\frac{2\frac{1}{2}}{13}$			32	2	7
5	$3\frac{1}{4}$	5	$\frac{2\frac{5}{8}}{3}$	5	$\begin{array}{c c}2\frac{1}{2}\\2\frac{7}{8}\end{array}$	5	$2\frac{3}{8}$ $2\frac{3}{4}$	4	$egin{array}{c c} 2rac{1}{4} \ 2rac{5}{8} \end{array}$	4	$egin{array}{c c} 2rac{1}{8} \ 2rac{1}{2} \end{array}$	3	$\frac{2}{2\frac{3}{8}}$	3	$\begin{vmatrix} 1\frac{3}{4} \\ 2\frac{1}{4} \end{vmatrix}$		$4\frac{1}{8}$			
and cap	$\frac{3_1}{4}$	3	3	2	$\frac{28}{28}$	2	$\frac{2_4}{2_4^3}$	2	$\frac{25}{8}$	-	$\begin{bmatrix} 2_1\\2_2^1\end{bmatrix}$	U	$\begin{bmatrix} 2\frac{3}{8} \end{bmatrix}$	Ü	$\frac{2_{4}}{2_{\frac{1}{4}}}$		4	30	$1\frac{7}{8}$	6
2	$2\frac{1}{8}$	2	2		$1\frac{7}{8}$		$\frac{1}{3}$		$1\frac{5}{8}$		$1\frac{1}{2}$		$1\frac{3}{8}$		11/4		$3\frac{7}{8}$	28	$1\frac{3}{4}$	$5\frac{1}{2}$
2	$3\frac{1}{4}$	2	3		$2\frac{7}{8}$		$2\frac{3}{4}$		$2\frac{5}{8}$		$2\frac{1}{2}$		$2\frac{3}{8}$		$2\frac{1}{4}$		$3\frac{3}{4}$	26	$1\frac{5}{8}$	5
2	$3\frac{1}{4}$		3		$2\frac{7}{8}$		$2\frac{3}{4}$		$2\frac{5}{8}$		$2\frac{1}{2}$		$2\frac{3}{8}$		$2\frac{1}{4}$		$3\frac{5}{8}$	24	$1\frac{1}{2}$	4
	$2\frac{1}{8}$		2		$1\frac{7}{8}$		$1\frac{3}{4}$		$1\frac{5}{8}$		$1\frac{1}{2}$		$1\frac{3}{8}$		$1\frac{1}{4}$			22		31
	$\frac{3\frac{1}{4}}{2}$		3		$\frac{21}{2}$		$2\frac{1}{4}$		2		2		2		2	The same of the same	$\frac{3\frac{1}{2}}{2}$		$1\frac{3}{8}$	
	$\frac{2\frac{1}{4}}{110}$		$\frac{2\frac{1}{8}}{1.8}$		$\frac{17}{8}$		$\frac{15}{8}$		$\frac{1}{2}$		$\frac{1\frac{1}{2}}{1}$		$\frac{1_{\frac{1}{2}}}{1_{\frac{4}{2}}}$		$\frac{1}{2}$		$3\frac{3}{8}$	$20\frac{1}{2}$	$1\frac{1}{4}$	3
2	$\frac{1_{\frac{1}{6}0}}{\frac{7}{8}}$		$1_{\overline{16}\atop \overline{16}}^{8}$		$\begin{array}{c c}1_{\overline{16}}\\ \frac{12}{16}\end{array}$		$\begin{array}{c} 1_{1\overline{6}} \\ \frac{12}{1\overline{6}} \end{array}$		$\begin{array}{c} 1_{\overline{1}\overline{6}} \\ \frac{11}{1\overline{6}} \end{array}$		$\begin{array}{c}1_{\overline{1}\overline{6}}\\\frac{1\overline{0}}{1\overline{6}}\end{array}$		$\begin{array}{c} 1_{\overline{1}\overline{6}} \\ \frac{9}{\overline{1}\overline{6}} \end{array}$		$1_{\frac{3}{16}}$		$3\frac{1}{4}$	19		
	8		16		16	-	16		16		1 6		16		1 6			-		

5.—The steel wire ropes to be guaranteed to withstand the breaking stress given in the table, and no hemp is to be used in the strands, a hemp core only to be fitted.

6.—A short length of each of the wires composing the rigging will be required, after being galvanized, to withstand a tensile stress equivalent to that set forth in the Table, and the aggregate strength of the wires must not be less than 10 per cent. in excess of that stress.


7.—Each wire will be required to be capable of being twisted around itself not less than eight times, and of being untwisted and straightened without breaking.

8.—Where it is proposed to adopt iron wire rigging the sizes proposed and the sparanteed tests should be submitted for the consideration of the Committee.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

2, White Lion Court, Cornhill, E.C.

13th April, 1893.

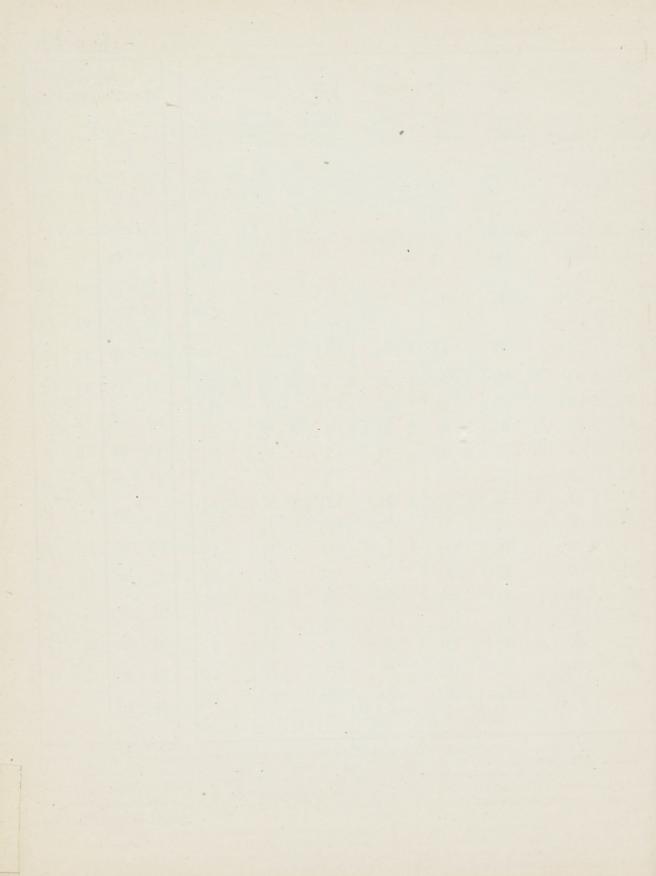


ANCHOR CRANES.

The dimensions of the principal parts of ANCHOR

CRANES to be in accordance with the following

Table:—



WEIGHT OF	SPREAD OF CRANE IN FEET.											
INCLUDING STOCK.	9	10	11	12	13	14	15					
Cwts.		DIA	METER OF MA	IN POST AT	DECK IN INC	HES.						
20	6	$6\frac{1}{4}$	$6\frac{1}{2}$	$6\frac{3}{4}$	63	7	714					
25	$6\frac{1}{2}$	$6\frac{3}{4}$	7	$7\frac{1}{4}$	$7\frac{1}{4}$	$7\frac{1}{2}$	$7\frac{3}{4}$					
30	7	$7\frac{1}{4}$	$7\frac{1}{2}$	$7\frac{3}{4}$	$7\frac{3}{4}$	8	81/4					
35	$7\frac{1}{4}$	$7\frac{1}{2}$	$7\frac{3}{4}$	8	8	$8\frac{1}{4}$	$8\frac{1}{2}$					
40	$7\frac{1}{2}$	$7\frac{3}{4}$	8	$8\frac{1}{4}$	$8\frac{1}{2}$	$8\frac{3}{4}$	9					
45	8	$8\frac{1}{4}$	$8\frac{1}{2}$	$8\frac{3}{4}$	9	$9\frac{1}{4}$	$9\frac{1}{2}$					
50	$8\frac{1}{4}$	$8\frac{1}{2}$	83/4	9	$9\frac{1}{4}$	$9\frac{1}{2}$	$9\frac{3}{4}$					
55	$8\frac{1}{2}$	$8\frac{3}{4}$	9	$9\frac{1}{4}$	$9\frac{1}{2}$	$9\frac{3}{4}$	10					
60	83/4	9	$9\frac{1}{4}$	$9\frac{1}{2}$	$9\frac{3}{4}$	10	$10\frac{1}{4}$					

CORRESPONDING DIMENSIONS OF MAIN POST, TIE RODS AND JIBS.

Diameter of Main Post at deck	ins.	ins. $6\frac{1}{2}$	ins. 7	$\begin{array}{c c} \text{ins.} \\ 7\frac{1}{2} \end{array}$			ins. 9			$10^{\frac{\mathrm{ins.}}{2}}$
Tie Rod	$1\frac{3}{4}$	$1\frac{7}{8}$	2	$2\frac{1}{8}$	$2\frac{1}{4}$	$2\frac{3}{8}$	$2\frac{1}{2}$	$2\frac{5}{8}$	$2\frac{3}{4}$	$2\frac{7}{8}$
Jib (Diameter at middle)	3	$3\frac{1}{4}$	$3\frac{1}{2}$	$3\frac{3}{4}$	4	$4\frac{1}{4}$	$4\frac{1}{2}$	$\frac{4^{3}}{4}$	5	$5\frac{1}{4}$

If two Tie rods are fitted, the diameter of each to be 3th that of the single rod required.

BOATS' DAVITS.

In the cases of Boats and Davits of ordinary proportions the diameter of the davits in inches should be one-fifth of the length of the boats in feet, but in cases where the height and spread of the davits or the dimensions of the boats are not of ordinary proportions, the diameter of the davits in inches should be found from the formula:—

 $\sqrt[3]{\frac{L\times B\times D}{40}\Big(\frac{H}{3}+S\Big)}$


where L, B and D are the dimensions of the boat, H the height of the davit above its uppermost point of support, and S the spread of the davit, each of these dimensions being in feet.

above its uppermost point of support, and S the spread of the davit, edimensions being in feet.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING,

2, WHITE LION COURT, CORNHILL, LONDON, E.C.

13th April, 1893.



. ,

No. 7.—FORM OF CERTIFICATE OF CHARACTER. LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING. ESTABLISHED 1834.

No. ——		Court, Cornhill,
These are to Certify, That the		
Master, Tons, bound to by the Surveyors to this Society, and reported to be,		- has been Surveyed at
and that she has been CLASSED and entered in the REGISTER BOO	K of this So	ciety with the Character
Witnes ————— Secretary.	s my hand,	Chairman.
FORM NO. 10.—FORM OF CERTIFICATE OF LLOY. AND BOILERS.	D'S MC FO	OR ENGINES
· LLOYD'S REGISTER OF BRITISH AND FOR ESTABLISHED 1834.	EIGN SHI	PPING.
NT .		n Court, Cornhill, 189
These are to Certify, that the surveyed by the Surveyed to the Surveyed by the	he Engines Ma	and Boilers of the
and were reported to be on the in good, ef at a pressure of lbs. per square inch. The Record ** Lloyd Machinery Certificate), has been made in the Register Book.	construction ficient, and s d's MC (in	0+
Witness my nand	,	Chairman.
FORM No. 11.—FORM OF CERTIFICATE OF B&MS FOR	R ENGINE	S AND BOILERS
LLOYD'S REGISTER OF BRITISH AND FORI		
	London.	Yourt, Cornhill, 189
These are to Certify, that the Boilers of the — Master — Tons, have been Son — by the Surveyors to this Society, and reported afe working condition, at a pressure of — lbs. per square inch. Record B&MS (in red) — (Boilers and Machinery Surveyed), has	urveyed at droube in The Survey been made in	good, efficient, and being completed, the
Secretary. Witness my hand, -		Chairman,

FORM OF CERTIFICATE OF THE CLASSIFICATION OF SHIPS IN THE LATE UNDERWRITERS' REGISTER OF IRON VESSELS.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING. ESTABLISHED 1834.

Amalgamated 1885 with the Underwriters' Registry of Iron Vessels. ESTABLISHED 1862.

No. —	No. 2, White Lion	Court, Cornhill,
	London,	103
	o Certify, That the	
	— Tons, bound to	
at by the Surveyors to	this Society, and reported to be on t	he ————
in a good and efficient state, and fit to carry as Classed and is entered in the Register Boo	dry and perishable Cargoes, and that	at she has been continued
periodical Surveys. ———————————————————————————————————	Witness my hand,	
		——— Chairman.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING,

AND THE

UNDERWRITERS' REGISTRY FOR IRON VESSELS AMALGAMATED.

NOTICE IS HEREBY GIVEN that it has been mutually resolved by the Committee of Lloyd's Register of British and Foreign Shipping and the Committee of the Underwriters' Registry for Iron Vessels to amalgamate the two Registries.

In accordance with the terms of amalgamation :-

- (1.) The publication of the "Underwriters' List of Iron Vessels" has been discontinued.
- (2.) Vessels holding a Class in the Underwriters' Registry will be entitled to the publication of this Class in future issues of Lloyd's Register Book so long as their Owners comply with the Rules of the Underwriters' Registry (1884-5) relating to Periodical Surveys.
- (3.) The information hitherto given in the Supplements to the Register Book of the Underwriters' Registry relating to Periodical Surveys, Changes of Owners, &c., will be inserted by posting with type in Lloyd's Register Book, and will also appear in the Supplements.
- (4.) In case the Owners of Vessels holding a Class in the Underwriters' Registry only, desire also a class under Lloyd's Register, the Committee of this Society undertake to favourably consider the claims of such Vessels on the documents produced by the Underwriters' Registry, and the necessary surveys as to present condition, with a view to assigning these Vessels the highest possible Class to which they are entitled, free of charge to the Owners. Full allowance will be made for any compensation for deviation from the Rules of Lloyd's Register, and the Vessels given the advantage of any difference in scantlings between the Rules as now existing and those which were in force when the Vessels were built.

The Committee of this Society will employ the Staff of the Underwriters' Registry, so far as may be practicable, in the Survey of Vessels holding a Class in that Registry, and of Vessels now Building or Contracted to be built to Class therein.

In the interest of the Owners of Vessels Classed in the Underwriters' Registry, some Members of the Committee of that Registry will have seats on Lloyd's Register Committees in London and Liverpool.

All communications respecting vessels Classed or now Building to Class in the Underwriters' Registry should in future be addressed to the Secretary to Lloyd's Register, either in London or Liverpool, as may be most convenient.

In the absence of any intimation from Owners of Ships classed in the Underwriters' Registry to the contrary, it will be concluded that they are quite agreeable to the Classes assigned in that Registry being recorded in Lloyd's Register Book as proposed.

By order of the Committee,

B. WAYMOUTH,

Lloyd's Register of British and Foreign Shipping, 2, White Lion Court, Cornhill, London, 1st September, 1885.

Secretary.

No. 689.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

2, White Lion Court, Cornhill, E.C., 6th December, 1888.

SURVEY OF ENGINES AND BOILERS.

DEAR SIR,

You will doubtless remember that when the late Underwriters' Registry for Iron Vessels was united with this Society's Register, it was agreed that vessels holding a class in the former Registry should be entitled to the publication of this class in future issues of Lloyd's Register Book, so long as their Owners complied with the Rules of the Underwriters' Registry, 1884-5, relating to periodical surveys.

Prior to the two Registers being united, it was contemplated by the Committee of the Underwriters' Registry to appoint Engineer Surveyors to survey the Engines and Boilers of vessels classed in that Registry.

Although, as you are aware, that proposal was not carried out, and Owners of Steam Vessels classed in the late Underwriters' Registry were consequently not liable to such a requirement, some Owners have nevertheless had the Engines and Boilers of their vessels surveyed, and the surveys have afterwards been noted in Lloyd's Register Book.

Under these circumstances, I am directed to intimate that the Committee are quite prepared to give instructions to the Society's Surveyors to survey the Engines and Boilers of the steamer hereunder named, and in the event of their being found, or put into, good condition, to make a notification to that effect in the Register Book.

It is not necessary to point out the advantages of survey by an independent body, but the Committee venture to think that now this subject is brought to your notice you will possibly come to the conclusion hat it is to your interest to avail yourself of such a safeguard.

I am, Dear Sir,

Your obedient servant,

B. WAYMOUTH, Secretary.

N.B.—The following notations are used to denote that the engines and boilers of steam vessels have been inspected by this Society's Engineer Surveyors, and have been found or put into efficient condition, viz.:—

LMC.—Machinery certified by Lloyd's Register.

B&MS.—Boilers and Machinery surveyed and reported to be satisfactory by the Engineer Surveyors to Lloyd's Register.

F Special Survey of Machinery or Boilers during construction (thus FLMC. FNE&B).

No. 834.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

2, White Lion Court, Cornhill, E.C., 14th January, 1892.

SURVEY OF ENGINES AND BOILERS.

DEAR SIR.

On the 6th December, 1888, the Committee of this Society, in a circular letter which is reprinted on the other side, suggested to owners of steam vessels holding a class assigned by the late Underwriters' Registry for Iron vessels that they would do well to submit the machinery and boilers of their vessels to the inspection of the Society's Engineer Surveyors.

Although some owners have seen fit to act upon this suggestion there are many vessels still sailing, the engines and boilers of which have never been surveyed by independent Surveyors, and the Committee therefore think it right again to draw the attention of owners of such vessels to the desirableness of having the engines inspected and certified to by this Society's officers.

I am, Dear Sir,

Yours faithfully,

CIRCULAR No. 536.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

CAST STEEL MAST CAPS.

SIR,

In reference to the use of cast steel mast caps, I am directed to inform you that the Committee of this Society will be prepared to admit of such steel mast caps being fitted to vessels intended to be classed in the Register Book on the following conditions:—

It is requisite that builders proposing to use cast steel mast caps shall, in the first instance, state the name of the firm by whom the caps are to be made, in order that the Committee may be satisfied that the manufacturers have proper facilities for making steel caps of a satisfactory quality.

With this object, the manufacturers will be required to give notice to the Committee when an opportunity can be afforded to the Society's surveyors to attend at the works, in order to report upon the appliances in use and the processes of manufacture, and also to ascertain by crucial tests that the material of which the caps are proposed to be made is of good and ductile quality.

Upon a favourable report being received from the Surveyors, after the inspection of the works of a manufacturer, the Committee will sanction the use of caps of his manufacture, provided test pieces be cast on the caps of sufficient size, to enable the Surveyors to subject the same to such tests as they may deem necessary, in order to satisfy themselves that the material is of good quality. The caps also are to be suspended and severely hammered in the presence of the Surveyors to ensure that the casting is sound in each case.

I am, your obedient servant,

2, White Lion Court, Cornhill, E.C., 6th November, 1884. B. WAYMOUTH, Secretary.

No. 583.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

2, White Lion Court, Cornhill, London, E.C., January 19th, 1886.


WELDING OF LARGE FORGINGS.

SIR.

The Committee having had under their consideration the subject of the manufacture of Large Forgings for shipbuilding purposes, I am directed to state that from experiments which have been made it has been found that to ensure sound welds in heavy forgings steam hammers should be employed instead of the sledge hammers formerly used; and the welds when of form should have the V angle not more than 60°. The old plan of screwing the parts together at a welding heat is not found to be satisfactory, especially in forgings of considerable sectional area, and in view of this, in future the welding of forgings exceeding forty square inches in sectional area will be required by the Committee to be done with steam hammers;

It has been the practice in some works to place the "shut" of the lower part of a stern frame in the sole piece. This is considered to be very objectionable; and the Surveyor should inform manufacturers that the welding should be placed in the lower part of the posts in all cases, and that such connections in the sole piece will not be sanctioned. In Rudder frames the welds of the upper part of the frame to the main piece should not be placed close together as indicated in the sketch at a. b: but should be arranged so as to be well clear of each other as indicated by a, c.

In cases where stern frames or rudders are taken out of vessels to be repaired, the Surveyors should furnish full particulars of the defects observed, including a sketch shewing the position and nature of the fracture on the Report, for the information of the Committee, so that a record may be kept in this office of all failures in such forgings.



. I am, Sir, your obedient servant,

B. WAYMOUTH,

Secretary.

NOTICE.—No. 614.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

CHARGES FOR INSPECTION OF FORGINGS.

The following scale of charges has been approved by the General Committee for the inspection of forgings for other than new vessels :-

SHIP FORGINGS OR CASTINGS.

For vessels not exceeding 600 tons , over 600 tons but not exceeding 1600 tons	£2	2	0
" over 600 tons but not exceeding 1600 tons	3	3	0
" over 1600	4	4	0
ENGINE FORGINGS OR CASTINGS.			
For shafts up to 12 inches in diameter	£1	1	0
" over "	2	2	0

These fees to be chargeable for the inspection of the whole or any portion of shafting which is not being forged and finished at the works where the engines are being made under the survey of the Society's Officers, and when more than two visits are necessary, to be increased.

N.B.—Travelling expenses are to be charged in the case of both old and new vessels.

By order of the Committee,

BERNARD WAYMOUTH,

2, White Lion Court, Cornhill, London, E.C., 16th December, 1886.

Secretary. (See Notice No. 620.)

No. 620.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

CHARGES FOR INSPECTING CASTINGS OR FORGINGS AS SET FORTH IN NOTICE No. 614.

In order to obviate misunderstanding arising in regard to the responsibility for the Payment of the Fees recently approved by the Committee of this Society for the inspection of Castings or Forgings, NOTICE IS HEREBY GIVEN that the charges in question, including travelling expenses, will be payable by the Forge or other Company by whom the forgings or castings are made.

By order of the Committee,

B. WAYMOUTH,

2, White Lion Court, Cornhill, London, E.C., 22nd February, 1887.

Secretary.

No. 636.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

SURVEY OF REPAIRS OF DAMAGE OF SHIPS OR MACHINERY AT PORTS ABROAD.

DEAR SIR,—I am directed to draw your attention to the fact that it is a condition of the classification of vessels by this Society that all Repairs of Ships or their Machinery that may be required at ports where there is a Surveyor to the Society, in order to the vessels retaining their characters in the Register Book, must be carried out under the inspection and to the satisfaction of the Society's Surveyor.

As the non-observance of this requirement in the case of vessels requiring repairs of damage, &c., at ports abroad has in some instances occasioned inconvenience to Owners, as well as expense of further surveys, I would venture to suggest the advisability of your giving instructions to the Masters of your vessels and to your Agents abroad, in all cases where surveys are required consequent upon damage or otherwise, to call in the Society's local Surveyor to hold such surveys, in order that the vessels' character in the Register Book may be duly maintained.

I may point out that, besides complying with the requirements of the Rules of this Society for the continuance of the classification of vessels, surveys held by the Society's Surveyors abroad will also serve all the purposes of Consular Surveys, which, being, as you are aware, *purely optional*, will not then be necessary.

I am, Dear Sir,

Yours very truly,

B. WAYMOUTH,

Secretary.

2, White Lion Court, Cornhill, London, E.C., 30th August, 1887.

NOTICE. No. 673.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

BUNKERS OF IRON AND STEEL SHIPS

SIR,—The attention of the Committee has recently been drawn to the case of a steel steamer, in which the framing, stringers and beam ends in the Coal Bunker space had almost wasted away through corrosion after a period of only 8 years, during which time, however, it would appear that the vessel

inside the bunkers had never been painted.

I am directed to acquaint you that, in view of the above, more than ordinary care is required in surveying bunkers; and you are to draw the attention of owners to the advantage of thoroughly coating such parts with some good preserving composition, such as Stockholm tar sprinkled with Portland cement, or best black varnish—put on the surfaces when clean and dry—in preference to the use of ordinary paint, more particularly in steel vessels in which the scantlings are less than in those built of iron.

I am, Sir,

Your obedient servant,

2, White Lion Court, Cornhill, London, E.C., 5th May, 1888.

B. WAYMOUTH,

Secretary.

No. 676.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

RECORD OF "EX STEAMER."

With reference to the practice of recording "ex-Steamer" in the Register Book after the names of sailing vessels that have originally been steamers,

Notice is hereby given, that the Committee, who recently had the subject under consideration,

have resolved that this practice is to be continued.

The Committee, however, will be prepared to consider representations that may be made of them in regard to sailing vessels that were formerly auxiliary steamers, with a view to determining whether or not the record in question is to be made in the case of such vessels.

By order of the Committee,

2, White Lion Court, Cornhill, E.C., 7th June, 1888.

B. WAYMOUTH, Secretary.

CIRCULAR No. 705.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

STEEL VESSELS.

Gentlemen,—With reference to the question of the liability of vessels built of steel to deterioration from corrosion, I am directed to acquaint you that the Committee of this Society, who have had this subject under their notice, think it right to place the results of their experience in regard thereto before owners of this description of property.

It is found that, in cases where the surfaces of vessels built of steel have not been properly scaled in the first instance and then protected with paint of good quality, the material is liable to great deterioration from corrosion, particularly in that portion exposed to the action of salt water. The Committee have no doubt that, with this information in your possession, you will see the desirability of taking the precaution of having new steel vessels belonging to you placed in dry dock and examined, within six months from the date of launching, so that, if symptoms of corrosion are found, the bottom may be properly scaled and coated.

I am also directed to point out the importance of having the inside and outside surfaces of steel vessels kept free from scale, and properly painted.

I am, Gentlemen, your obedient servant,

2, White Lion Court, Cornhill, London, E.C., 7th March, 1889. B. WAYMOUTH, Secretary.

CIRCULAR No. 722.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

2, White Lion Court, Cornhill, E.C.,

1st September, 1889.

PETROLEUM VESSELS.

SIR,

With reference to the testing of the tanks of vessels intended to carry oil, I have to acquaint you that the Committee are of opinion that such tanks should be capable of withstanding a pressure of a head of water 15 feet above the crown of the tank, which would be equal to a pressure of 6lbs. per square inch.

I am, Sir, your obedient servant,

B. WAYMOUTH, Secretary.

CIRCULAR No. 773.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

2, White Lion Court, Cornhill, E.C.,

14th August, 1890.

DOUBLING PLATES IN BOILERS.

SIR.

The attention of the Committee has been drawn to the case of a boiler in which the lower parts of the combustion chambers, instead of having been constructed in the usual manner of one plate of sufficient thickness, was made of a comparatively thin plate strengthened by a doubling plate, with the result that the inner plating became bulged and boiler rendered leaky.

In view of the above I am directed to draw your attention to the necessity of seeing that no doubling plates are fitted in any boiler in positions where they are exposed to the action of the heat of the fires. In such positions the necessary strength should be provided for, if possible, by using a single plate of sufficient thickness, or, where this is impracticable the plates should be strengthened by stays or by \bot or \bot bars.

I am, Sir, your obedient servant,

B. WAYMOUTH, Secretary.

CIRCULAR No. 831.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

2, White Lion Court, Cornhill, London, E.C., 30th November, 1891.

OIL-CARRYING VESSELS.

SIR.

I am directed to send for your information results, which the Committee consider may be found useful, of the experience gained by the Officers of this Society respecting the effects on the hulls of some vessels constructed for the purpose of carrying oil in bulk when some of their tanks have been used for carrying water ballast.

It has been found that, in ballasting such vessels with water, the consecutive tanks in some cases have not been run up, and, by thus leaving empty spaces in the main body of the vessel, undue strains have been brought upon the structure at these parts, leading to considerable damage to the vessel.

In other cases, sufficient care has not been taken to ensure that the tanks have been quite filled, and kept filled; and a deep empty tank has even sometimes been run up at sea whilst the vessel was encountering heavy weather. By these means, great strains and damage have been caused from masses of free water being brought against the bulkheads, &c., internally.

It should be borne in mind that carrying liquid in bulk, independently of the nature of the cargo, causes considerably more straining on the plating and riveting of vessels than would occur in carrying general cargo. In the former instance the weight of the cargo is brought only on the outside plating, whereas with general cargo a great portion of the strain is borne by the floors, frames, keelsons, stringers, &c. Great precaution is therefore necessary in oil-carrying vessels to prevent the strains, which are necessarily exceptional, from being materially intensified by the action within the vessel of large quantities of moving oil or water.

It may not be out of place to remark that provision, as regards the trim of the vessel, should be made so that the consecutive tanks in the midship part can be quite filled. These spaces should be sub-divided, particularly at the fore end, to such an extent that the trim of the vessel will admit of the tanks being quite filled, without the statutory depth of loading being exceeded.

Experience has also shown that danger arises from not filling the water spaces at the end of the stokehold with water so as to prevent oil finding its way into the coal bunkers and saturating the coals.

I am, Sir,

Your obedient servant.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

2, White Lion Court, Cornhill, E.C.,

7th December, 1891.

FEEDERS IN GRAIN-LADEN VESSELS.

SIR.

I am instructed to draw your attention to a case that has recently occurred, in which a grain-laden steamer capsized owing to the giving way of the feeders in the 'tween decks, and a large portion of the grain contained in them being thrown towards one side of the vessel.

In the case in question, the lower holds were completely filled with grain in bulk and the hatchways were utilized as feeders, formed of planks round the hatchways. Additional feeders were also provided at the sides of the vessel extending from the main to the upper deck.

From investigations made by the Officers of this Society it has been found that, as compared with similar vessels loaded in the same manner, the vessel in question had both considerable initial stability, due to her comparatively large metacentric height, and also a good range of stability, due to her large freeboard. There is no reason, therefore, to conclude that the accident was in any way due to an inherent want of stability.

The heeling of the vessel, however, caused by the grain from the feeders being thrown on one side, conduced to the cargo gradually settling down on the depressed side and thus continuously increasing the angle of the heel, until capsizing occurred.

Under these circumstances, it is considered useful to draw the attention of Shipowners to the fact that although feeders are a source of safety in grain laden vessels, in providing for the holds being kept full on the grain settling down, yet if they be not efficiently constructed, and properly shored at the sides and ends, they may lead to danger, as instanced in the case referred to.

I am, Sir, your obedient servant,

A. G. DRYHURST, Secretary.

CIRCULAR No. 847.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

2, White Lion Court, Cornhill, E.C., 23rd June, 1892.

SIR,

With reference to the cases of vessels in which the steel or iron decks required by the Society's Rules are not carried continuously throughout the length of the vessels, I am directed to acquaint you for your guidance, that in vessels having a raised quarter connected to a bridge house, and requiring by Table S 5 more than one iron or steel deck, the bridge house should extend over not less than the half length amidships, to comply practically with this requirement.

I am, Sir,

Your obedient servant,

No. 851.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

ANCHORS AND CABLES.

NOTICE IS HEREBY GIVEN that the notation of Lloyd's A&CP (Lloyd's Anchors and Chains Proved) is made in the Society's Register Book in the case of Vessels, the Anchors and Chains of which have been tested at Proving Establishments under the control of the COMMITTEE of LLOYD'S REGISTER OF SHIPPING.

The following establishments are under the control of the Committee :-

Lloyd's Proving House, N	ETHERTON (nr. Dudley)		Superintendent	Mr. H. Green.
		Assistant	,,	Mr. W. J. Relf.
Lloyd's Proving House, TI	IPTON (Staffordshire)		,,	Mr. C. E. Perrins.
		Assistant	,,	Mr. J. A. Danks.
Lloyd's Proving House, L	OW-WALKER-ON-TYNE		,,	Mr. T. Tindale.
Lloyd's Proving House, C.	HESTER (Saltney)		,,	Mr. A. S. Jack.
		Assistant	,,	Mr. J. Littler.
Lloyd's Proving House, G	LASGOW		,,	Mr. E. Seedhouse.
Lloyd's Proving House, C.	ARDIFF		,,	Mr. G. W. Penn.

The notation of A&CP will, as heretofore, be recorded in respect to Anchors and Chain Cables tested at the Sunderland Public Proving Machines.

By order of the Committee,

A. G. DRYHURST, Secretary.

2, White Lion Court, Cornhill, London, E.C., Revised, December, 1897.

CIRCULAR No. 852.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

2, White Lion Court, Cornhill, E.C., 27th September, 1892.

SIR,

It having recently come to the knowledge of the Committee that, in some vessels where Pitch Pine decks have been fitted, damage to cargo has resulted from leakage, owing to the shrinking of the decks, and to rents and shakes, I am directed to inform you that, in cases where it is intended to fit the weather decks of Pitch Pine in vessels classed, or intended for classification in the Society's Register Book, you are to take steps to ensure that the decks have been well seasoned after being cut.

Special attention should also be directed to the laying of decks of this material and to the caulking of the seams and rents.

I am, Sir, your obedient servant,

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

RECORD OF TEAK DECKS IN THE REGISTER BOOK.

NOTICE IS HEREBY GIVEN that in any case in which the working weather deck of vessels classed under the Two or Three Deck Rule, or Spar Deck or Awning Deck Rules, is of teak, the Committee will be prepared to record the fact in the Society's Register Book (thus "Deck Teak"), upon receiving a request to that effect from the owners, and subject to the deck being examined by the Society's Surveyors, and found to be in good condition.

In the case of a vessel having a bridge house, the deck in the alleyways must in order to render her eligible for the above notation, be of teak, but it is not required that in such cases the Poop, Bridge, and Topgallant Forecastle decks, shall be of East India Teak.

By order of the Committee,

A. G. DRYHURST,

2, White Lion Court, Cornhill, London, E.C., 2nd November, 1893. Secretary.

CIRCULAR No. 912.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

2, White Lion Court, Cornhill, E.C.,

22nd October, 1894.

BOILER MANHOLES AND FITTINGS.

SIR.

The Committee's attention has been drawn to some accidents which have recently occurred to boilers of classed vessels in consequence of the bad fitting of manhole doors and of drain plugs, some of which have been attended with fatal results. I am directed, therefore, to remind you that in surveying boilers, new or otherwise, your examination should include not only the boilers, but also all the mountings and their fastenings, and the manhole doors and their fastenings, special attention being given to the fit of the spigots of the doors in the manholes. These should be so well fitted and of such a depth as to render it absolutely impossible for the jointing material to be forced out between the spigot and the boiler plate, even when the door is so placed that the clearance is all on one side.

I am, Sir, your obedient servant,

A. G. DRYHURST,

Secretary.

NOTICE No. 920.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

REDUCTION OF FEES.

NOTICE IS HEREBY GIVEN that the General Committee, at a Special Meeting held this day, have determined that, on and after 1st January, 1895 and until otherwise ordered, an abatement of 10 per cent. shall be allowed from all fees chargeable after that date for surveys held in the United Kingdom on old ships and old engines and boilers.

By order of the Committee,

A. G. DRYHURST,

2, White Lion Court, Cornhill, London, E.C., 20th December, 1894.

Secretary.

CIRCULAR No. 982.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

2, White Lion Court, Cornhill, E.C.

29th April, 1897.

SHAFTING.

Sir,

The subject of the numerous failures and condemnations of screw shafts has recently been under the consideration of the Committee, and it has been suggested that in some cases the failure of these shafts has been due to their having been worked out of line. I am therefore directed to request that in the cases of new vesse's engined under your survey you will pay great attention to this matter, assuring yourself, as far as possible by personal inspection, that the stern tube and shaft bearings are so placed in the vessel as to ensure the shafting being in true line throughout.

Considerable importance is also attached to maintaining the shafting in line, especially as regards the screw shaft, it being thought that considerable risk often arises from the stern bush being allowed to become worn, and that fewer failures of these shafts would occur if the bushes were more frequently lined up. In drawing your particular attention to this point, I am to request that in reporting the results of Surveys held in Dry Dock you will in all cases state on your report the amount the stern bush is actually worn, taking care that the measurement of the wear is ascertained from the bush itself, and not from the outer ring, which may not in all cases be true with the bush. I am further to request that in all cases when screw or other shafts are renewed under your survey you will state in your report particulars of the defects in the shaft, and in cases where you are able to form a decided opinion, the cause to which the defects are attributable.

I am. Sir.

Your obedient servant,

A. G. DRYHURST,

Secretary.

NOTICE No. 1026.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

NOTICE IS HEREBY GIVEN THAT THE FOLLOWING ALTERATIONS AND AMENDMENTS HAVE BEEN MADE BY THE GENERAL COMMITTEE IN THE RULES OF THE SOCIETY FOR STEEL VESSELS, AND FOR YACHTS.

TABLE 22.

Tonnages for regulating the equipments of vessels have been omitted from the Table in the case of Sailing Vessels above 1,600 tons, and in the case of Steam Vessels above 2,100 tons, and in the case of Steam Trawlers above 160 tons.

Section 25.—CLOSE CEILING AND CARGO BATTENS.

Paragraph 1 (page 75) has been amended to read as follows:-

"All vessels to be closely ceiled from the main keelson to the upper part of the bilges, the ceiling to be secured in such a manner as to be easily removed. Cargo battens to be fitted from the upper part of the bilges upwards, including the 'tween decks of all types of vessels, and in *permanently* enclosed spaces in bridge houses, poops and other deck erections. In spaces exclusively intended for carrying coal, cargo battens may be dispensed with."

Paragraph 4 (page 75) has been amended to read as follows:—

"Vessels exclusively engaged in carrying coal, ore, or wood, need not have cargo battens fitted, but in each such case the certificate of classification will have the following words written on it 'subject to the vessel being engaged exclusively in carrying coal, ore, or wood, while without cargo battens'."

CIRCULAR No. 909—FITTING OF CARGO BATTENS—page 155, has been withdrawn from the Rules.

Section 38 .- HAND PUMPS.

Paragraph 7 (page 83), has been amended to read as follows:—

"7. All hand pumps to be capable of being worked from the upper or main decks above the deep load water line, and the lift is in no case to exceed 24 feet. The sizes of the hand pumps to be not less than those given in the following Table:—

		Hand Pumps in Holds.			
Tonnage under Upper Deck.		Diameter of Barrel.	Diameter of Tail Pipe.		
In vessels under 500 tons	 	Inches.	Inches.		
In vessels of 500 tons but under 1,000 tons	 	$4\frac{1}{2}$	$2\frac{1}{4}$		
In vessels of 1,000 tons and under 2,000 tons	 	5	$2\frac{1}{2}$		
In vessels of 2,000 tons and above	 	$5\frac{1}{2}$.	$2\frac{3}{4}$		

In lieu of hand pumps in each compartment an approved fly wheel pump may be fitted if it is connected to the steam pump bilge suction pipes of these compartments."

Section 44.—BULKHEADS OF POOPS AND BRIDGE HOUSES.

Paragraphs 4 & 5 (page 90), have been amended to read as follows:—

- "4. Bulkheads at the fore end of all bridge houses and of poops extending over engine and boiler, or other deck openings, to be of the thickness of their side plating, with coaming plates $\frac{1}{20}$ of an inch thicker than their bulkheads, and to be stiffened with bulb plates of not less size than those required for forecastle beams, and angles of the size required for the vessel's reverse frames, spaced 30 inches apart, and connected both to the coaming plates and to the deck plating, or to an athwartship plate on the beams both below and above, with a bracket-plate to each end of the bulb stiffener; or other equivalent strength introduced.
- 5. Bulkheads at the fore end of poops not extending over engine and boiler, or other deck openings, to be of the thickness of their side plating, with coaming plates $\frac{1}{20}$ of an inch thicker, and to be stiffened with angle bars the size of the frames spaced 30 inches apart."

Note.—The foregoing alterations also apply to the Rules for Iron Vessels.

RULES FOR YACHTS—TABLE 14—EQUIPMENT.

This Table has been amended as regards Anchors, Cables, Hawsers and Warps for Sailing Yachts and for Steam Yachts between the grade Nos. 2,000 and 5,450 and Tonnages 42 and 160 tons, and two footnotes added regarding equipment for Steam Yachts having erections.

By order of the Committee,

2, White Lion Court, Cornhill, London, E.C. 14th December, 1899.

LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING.

- NOTICE IS HEREBY GIVEN THAT ALTERATIONS AND AMENDMENTS HAVE BEEN MADE BY THE GENERAL COMMITTEE IN THE RULES OF THE SOCIETY FOR STEEL VESSELS, AND IN THE RULES FOR MACHINERY FOR STEAM VESSELS, STEAM YACHTS AND ELECTRIC LIGHTING.
- General Rules, Section 28. Paragraph 1, Page 29. Alminimum Fee of £7 0s. 0d. is prescribed for Special Surveys during construction.
- Section 13. Beams. The whole Section amended, and new Tables, S 4 and S 4A, provided. The present Table S 4 in the Rules cancelled.
- Section 14. Beams and Stringers in holds. Slight amendments in Paragraphs 9, 10, 11, 12, 13, 17, 18, 20, 22, 23, 24, 25, 26 and 27.
- Section 14a. Web frames in lieu of hold beams. Paragraph 5 amended.
- Section 15. Pillars. The whole Section amended, and new Tables S1A and S1B provided, giving minimum scantlings for solid and hollow pillars.

 All references to pillars in the present Table S1 have been omitted.
- Section 21. Riveting. Paragraph 6 amended.
- Section 22. Bulkheads. Paragraphs 1, 2 and 7 amended.
- Section 23. Steel decks. Paragraphs 13, 14 and 18 amended.
- Section 36. Rudders and steering gears. Paragraphs 2, 8 and 9 amended. Paragraph 3 omitted, and new paragraphs relating to requirements for steering gear introduced between the present Paragraphs 7 and 8, and new Table S 3 B provided, setting forth the minimum sizes of steering chains, rods and tillers for Steam Vessels.
- Section 38. Pumping arrangements. Paragraph 7 amended, and Paragraph 13 omitted.
- Section 39. Equipment. Paragraph 8, a new clause added, and as a footnote to Table 22.
- Section 42. Spar-decked Vessels. Two new paragraphs added, dealing with Spar-deck Vessels with only one deck laid.
- Section 45. Raised quarter-decks and sunk forecastles. Paragraph 4 slightly amended.
- Table S 6. The second footnote amended.

RULES FOR MACHINERY OF STEAM VESSELS.


- Shafts. Paragraphs 30, 32, 59, 60, 61, 62 and 65 amended.
- Electric Lighting. Paragraph 14 amended.
 - NOTE.—The foregoing alterations and amendments also apply to the Rules for Iron Vessels.
 - By order of the Committee,
 - 2, WHITE LION COURT, CORNHILL, LONDON, E.C. A. G. DRYHURST, Secretary. 26th April, 1900.
 - N.B.—The above-mentioned alterations and amendments are embodied in the issue of the Rules for Steel Vessels for 1900-1901.

ASSIGNMENT OF FREEBOARD

Under the Merchant Shipping Act, 1894, the Committee of Lloyd's Register are empowered to assign freeboards to British Vessels as required by the Act. Forms of application for the assignment of freeboard can be obtained from the London, or other, offices of the Society.

The mode of Marking, approved by the Board of Trade, is as follows :-


FREEBOARD MARKING FOR STEAMERS.

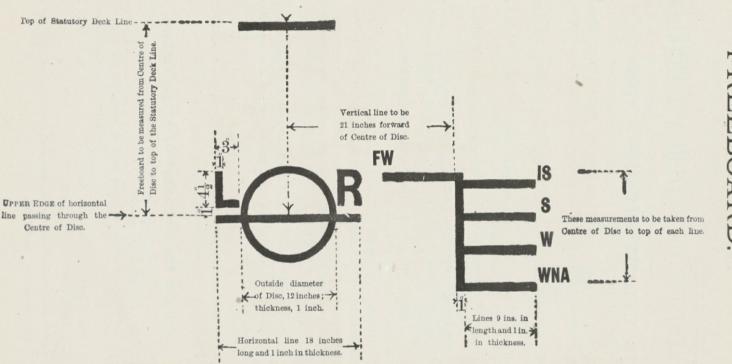

The Centre of Disc to be placed on both sides of vessel amidships, i.e., at the middle of the length of the load water line. Vessels are to be marked with such of the borizontal lines as are applicable to the nature of their employment. In accordance with the regulations made by the Board of Trade, the discs and lines must be permanently marked by centre punch marks or cutting, and the particulars given in the Certificate are to be entered in the official log.

N.B.—It is a condition on which an awning or partial awning-decked vessel is classed in the Society's Register Book that the Freeboard assigned shall be marked on the vessel's sides as above prescribed; and, under the provisions of Section 43 of the Society's Rules for Iron or Steel Ships. If the vessel proceed to sea with a less freeboard than that approved by the Committee, or if the freeboard mark be placed higher than the position assigned by the Committee, the vessel will be liable to have her class expunged from the Register Book.

FREEBOARD MARKING FOR SAILING VESSELS.

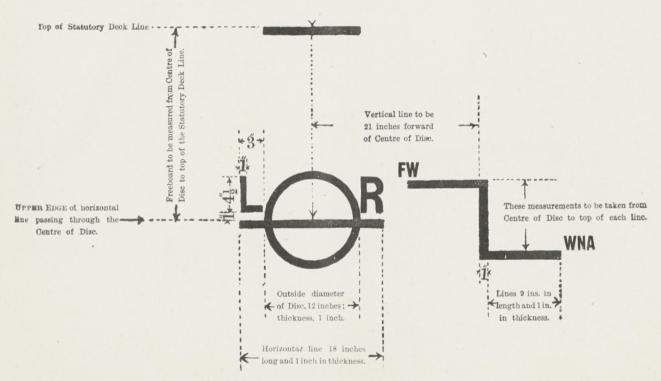

The Centre of Disc to be placed on both sides of vessel amidships, i.e., at the middle of the length of the load line. Coasting vessels are required to be marked with only the maximum load line in fresh water. In accordance with the regulations made by the Board of Trade, the disc and lines must be permanently marked by centre punch marks or cutting, and the particulars given in the Certificate are to be entered in the official log.

LONDON:

PRINTED BY LLOYD'S REGISTER OF BRITISH AND FOREIGN SHIPPING, AT THE SOCIETY'S PRINTING HOUSE, 64, SOUTHWARK STREET, S.E.

1900.



1900=01